



INSPIRE Infrastructure for Spatial Information in Europe

D2.8.III.6 Data Specification on *Utility and Government Services* – Technical Guidelines

Title	D2.8.III.6 Data Specification on Utility and Government Services – Technical Guidelines
Creator	Temporary MIWP 2021-2024 sub-group 2.3.1
Date of publication	2024-01-31
Subject	INSPIRE Data Specification for the spatial data theme Utility and Government Services
Publisher	INSPIRE Maintenance and Implementation Group (MIG)
Type	Text
Description	This document describes the INSPIRE Data Specification for the spatial data theme Utility and Government Services
Format	AsciiDoc
Licence	Creative Commons Attribution (cc-by) 4.0
Rights	Public
Identifier	D2.8.III.6_v3.2.0
Changelog	https://github.com/INSPIRE-MIF/technical-guidelines/releases/tag/v2024.1
Language	en
Relation	Directive 2007/2/EC of the European Parliament and of the Council of 14 March 2007 establishing an Infrastructure for Spatial Information in the European Community (INSPIRE)

Foreword

How to read the document?

This document describes the *"INSPIRE data specification on Utility and Government Services – Technical Guidelines"* version 3.0 as developed by the Thematic Working Group (TWG) *Utility and Government Services* using both natural and a conceptual schema language.

The data specification is based on a common template^[1] used for all data specifications, which has been harmonised using the experience from the development of the Annex I, II and III data specifications.

This document provides guidelines for the implementation of the provisions laid down in the Implementing Rule for spatial data sets and services of the INSPIRE Directive. It also includes additional requirements and recommendations that, although not included in the Implementing Rule, are relevant to guarantee or to increase data interoperability.

Two executive summaries provide a quick overview of the INSPIRE data specification process in general, and the content of the data specification on *Utility and Government Services* in particular. We highly recommend that managers, decision makers, and all those new to the INSPIRE process and/or information modelling should read these executive summaries first.

The UML diagrams (in Chapter 5) offer a rapid way to see the main elements of the specifications and their relationships. The definition of the spatial object types, attributes, and relationships are included in the Feature Catalogue (also in Chapter 5). People having thematic expertise but not familiar with UML can fully understand the content of the data model focusing on the Feature Catalogue. Users might also find the Feature Catalogue especially useful to check if it contains the data necessary for the applications that they run. The technical details are expected to be of prime interest to those organisations that are responsible for implementing INSPIRE within the field of *Utility and Government Services*, but also to other stakeholders and users of the spatial data infrastructure.

The technical provisions and the underlying concepts are often illustrated by examples. Smaller examples are within the text of the specification, while longer explanatory examples and descriptions of selected use cases are attached in the annexes.

In order to distinguish the INSPIRE spatial data themes from the spatial object types, the INSPIRE spatial data themes are written in *italics*.

The document will be publicly available as a 'non-paper'. It does not represent an official position of the European Commission, and as such cannot be invoked in the context of legal procedures.

Legal Notice

Neither the European Commission nor any person acting on behalf of the Commission is responsible for the use which might be made of this publication.

Interoperability of Spatial Data Sets and Services – General Executive Summary

The challenges regarding the lack of availability, quality, organisation, accessibility, and sharing of spatial information are common to a large number of policies and activities and are experienced across the various levels of public authority in Europe. In order to solve these problems it is necessary to take measures of coordination between the users and providers of spatial information. The Directive 2007/2/EC of the European Parliament and of the Council adopted on 14 March 2007 aims at establishing an Infrastructure for Spatial Information in the European Community (INSPIRE) for environmental policies, or policies and activities that have an impact on the environment.

INSPIRE is based on the infrastructures for spatial information that are created and maintained by the Member States. To support the establishment of a European infrastructure, Implementing Rules addressing the following components of the infrastructure have been specified: metadata, interoperability of spatial data sets (as described in Annexes I, II, III of the Directive) and spatial data services, network services, data and service sharing, and monitoring and reporting procedures.

INSPIRE does not require collection of new data. However, after the period specified in the Directive^[2] Member States have to make their data available according to the Implementing Rules.

Interoperability in INSPIRE means the possibility to combine spatial data and services from different sources across the European Community in a consistent way without involving specific efforts of humans or machines. It is important to note that "interoperability" is understood as providing access to spatial data sets through network services, typically via Internet. Interoperability may be achieved by either changing (harmonising) and storing existing data sets or transforming them via services for publication in the INSPIRE infrastructure. It is expected that users will spend less time and efforts on understanding and integrating data when they build their applications based on data delivered in accordance with INSPIRE.

In order to benefit from the endeavours of international standardisation bodies and organisations established under international law their standards and technical means have been utilised and referenced, whenever possible.

To facilitate the implementation of INSPIRE, it is important that all stakeholders have the opportunity to participate in specification and development. For this reason, the Commission has put in place a consensus building process involving data users, and providers together with representatives of industry, research and government. These stakeholders, organised through Spatial Data Interest Communities (SDIC) and Legally Mandated Organisations (LMO)^[3], have provided reference materials, participated in the user requirement and technical^[4] surveys, proposed experts for the Data Specification Drafting Team^[5], the Thematic Working Groups^[6] and other ad-hoc cross-thematic technical groups and participated in the public stakeholder consultations on draft versions of the data specifications. These consultations covered expert reviews as well as feasibility and fitness-for-purpose testing of the data specifications^[7].

This open and participatory approach was successfully used during the development of the data specifications on Annex I, II and III data themes as well as during the preparation of the

Implementing Rule on Interoperability of Spatial Data Sets and Services^[8] for Annex I spatial data themes and of its amendment regarding the themes of Annex II and III.

The development framework elaborated by the Data Specification Drafting Team aims at keeping the data specifications of the different themes coherent. It summarises the methodology to be used for the development of the data specifications, providing a coherent set of requirements and recommendations to achieve interoperability. The pillars of the framework are the following technical documents^[9]:

- The *Definition of Annex Themes and Scope* describes in greater detail the spatial data themes defined in the Directive, and thus provides a sound starting point for the thematic aspects of the data specification development.
- The *Generic Conceptual Model* defines the elements necessary for interoperability and data harmonisation including cross-theme issues. It specifies requirements and recommendations with regard to data specification elements of common use, like the spatial and temporal schema, unique identifier management, object referencing, some common code lists, etc. Those requirements of the Generic Conceptual Model that are directly implementable are included in the Implementing Rule on Interoperability of Spatial Data Sets and Services.
- The *Methodology for the Development of Data Specifications* defines a repeatable methodology. It describes how to arrive from user requirements to a data specification through a number of steps including use-case development, initial specification development and analysis of analogies and gaps for further specification refinement.
- The *Guidelines for the Encoding of Spatial Data* defines how geographic information can be encoded to enable transfer processes between the systems of the data providers in the Member States. Even though it does not specify a mandatory encoding rule it sets GML (ISO 19136) as the default encoding for INSPIRE.
- The *Guidelines for the use of Observations & Measurements and Sensor Web Enablement-related standards in INSPIRE Annex II and III data specification development* provides guidelines on how the "Observations and Measurements" standard (ISO 19156) is to be used within INSPIRE.
- The *Common data models* are a set of documents that specify data models that are referenced by a number of different data specifications. These documents include generic data models for networks, coverages and activity complexes.

The structure of the data specifications is based on the "ISO 19131 Geographic information - Data product specifications" standard. They include the technical documentation of the application schema, the spatial object types with their properties, and other specifics of the spatial data themes using natural language as well as a formal conceptual schema language^[10].

A consolidated model repository, feature concept dictionary, and glossary are being maintained to support the consistent specification development and potential further reuse of specification elements. The consolidated model consists of the harmonised models of the relevant standards from the ISO 19100 series, the INSPIRE Generic Conceptual Model, and the application schemas^[11] developed for each spatial data theme. The multilingual INSPIRE Feature Concept Dictionary contains the definition and description of the INSPIRE themes together with the definition of the spatial object types present in the specification. The INSPIRE Glossary defines all the terms (beyond the spatial object types) necessary for understanding the INSPIRE documentation including the terminology of other components (metadata, network services, data sharing, and monitoring).

By listing a number of requirements and making the necessary recommendations, the data specifications enable full system interoperability across the Member States, within the scope of the application areas targeted by the Directive. The data specifications (in their version 3.0) are published as technical guidelines and provide the basis for the content of the Implementing Rule on Interoperability of Spatial Data Sets and Services^[12]. The content of the Implementing Rule is extracted from the data specifications, considering short- and medium-term feasibility as well as cost-benefit considerations. The requirements included in the Implementing Rule are legally binding for the Member States according to the timeline specified in the INSPIRE Directive.

In addition to providing a basis for the interoperability of spatial data in INSPIRE, the data specification development framework and the thematic data specifications can be reused in other environments at local, regional, national and global level contributing to improvements in the coherence and interoperability of data in spatial data infrastructures.

Utility and Government Services – Executive Summary

The theme "*Utility and Government Services*" covers different feature types under its scope (i.e. miscellaneous energy networks, plentiful public services of different types and several environmental management facilities).

In order to develop data specifications, the list of geographical entities has been restricted to those features potentially linked with environmental issues (according to the INSPIRE directive fundamentals) and moreover dispatched in three main subthemes described below.

Nevertheless, the "*Utility and Government Services*" thematic approach consists in providing quite simple information describing such services, among which:

- Feature location;
- Party involved in the service (Administration or organization on behalf of an administrative mandate);
- Basic technical characteristics, such as capacity or details on the type of service provided.

The use cases studied and taken into account in the data specifications development process are based on few European regulation processes (such as the Waste Framework Directive– cf. Annexes B & C of the current document), but other non-legally referenced basic uses - as locating features and simply describing information - were also to be considered.

This statement is principally due to (i) various national and local uses – impossible to be exhaustively considered – and also (ii) the aim of simplicity underlying the data specifications development process.

Considering width of the scope, it has been decided to split the thematic into 3 different sub-domains:

1. Utility networks;
2. Administrative and social governmental services;
3. Environmental management facilities.

Each of them has its own modelization, independent from one to another (though some elements may be linked between sub-domains).

The purpose of such an approach is permitting to any data provider and user to exchange its own data with as much flexibility as possible.

1. The "***Utility networks***" sub-model is structured into 2 profiles:
 - **Utility Networks Profile:** derived from the Generic Network model^[13], this modelization is based on a node-arc-node structure and network concept. Especially designed for utility networks managers willing to describe their data into a structured modelization that allows its business use (estimation of propagation, calculation of capacities, etc.); the technical

description of several network elements is limited to very simple information (type of material transported and basic characteristics). The use of this profile is also adapted for non-topological data, since the relation between nodes and arcs is optional;

- **Extended Utility Networks Profile:** annexed proposals for richer models, detailing the Utility Networks Profile, i.e. same structure based on the Generic Network model and many other attributes and lists of values proposed to better describe the utility networks characteristics for a richer use.

In each profile, the information is detailed in several application schemas:

- Electricity network
- Oil, Gas & Chemicals network
- Sewer network
- Telecommunications network (only proposed in the technical guidance, out of legislation)
- Thermal network
- Water network

In addition to generic network information (utility link elements, connection with nodes and belonging to a network), each element (UtilityLinkSet, UtilityNode and UtilityNetwork) is detailed within its specific application schema through various attributes, developed through several codelists values or Measure types for most of them.

2. The model of the **"Administrative and social governmental services"** sub-theme is based on one single central feature type, "GovernmentalService", that is basic in a core-defined profile (mainly location, contact and type of service information) and detailed in an extended one (including occupancy, resources and other description).

Its geometric reference can be an existing object (such as INSPIRE Annex I "Address", Annex III "Building" or abstract type "ActivityComplex" described below) or a created object (GM_Object, mostly GM_Point to be consistent with the well-used notion of POI = Point of Interest).

The GovernmentalService type value is selected from a codelist of more than 50 items, organized in a hierarchical structure, based on the "Classification of the functions of government" - abbreviated as COFOG, currently used by EuroStat, and developed within the respect of INSPIRE criteria (focused on public & environmental aspects).

3. The **"Environmental Management Facilities"** application schema defines a single feature type called "EnvironmentalManagementFacility", with a generic geometric reference (GM_Object). "EnvironmentalManagementFacility" is a specialisation of the Generic Conceptual Model "ActivityComplex" feature type. This ensures close alignment (harmonisation) with other feature types derived from "ActivityComplex", especially those from the *Production and Industrial Facilities* (PF) and *Agricultural and Aquaculture Facilities* (AF) themes.

The "EnvironmentalManagementFacility" feature type is suitable for the representation of sites and installations. The "parentFacility"-association from "EnvironmentalManagementFacility" to "EnvironmentalManagementFacility" supports the representation of hierarchies among installations and sites.

Several aspects of environmental management facilities are represented in the model, most notably facility functions, permissions, capacities, related parties (owners, operators, authorities) and status information. Several established codelists are used for the representation of such aspects, including Eurostat's NACE list of economic activities, the Decision 2000/532 List of Wastes and the Waste Framework Directive (2008/98) list of disposal and recovery operations.

Acknowledgements

Many individuals and organisations have contributed to the development of these Guidelines.

The Thematic Working Group *Utility and governmental services* (TWG-US) included:

Frédéric Brönnimann (TWG Facilitator), Maksim Šestić (TWG Editor), Pedro A. González Pérez, Frank Haugan, Nadine Magdalinski, Katleen Miserez, Norbert Pfaffinger, Janine Ritschl, Frank Schwarzbach, Jef Vanbockryck, Angel López Alós (European Commission contact point).

Other contributors to the INSPIRE data specifications are the Drafting Team Data Specifications, the JRC Data Specifications Team and the INSPIRE stakeholders - Spatial Data Interested Communities (SDICs) and Legally Mandated Organisations (LMOs).

Contact information

Maria Vanda Nunes de Lima & Michael Lutz
European Commission Joint Research Centre (JRC)
Institute for Environment and Sustainability
Unit H06: Digital Earth and Reference Data
<http://inspire.ec.europa.eu/index.cfm/pageid/2>

Table of Contents

1. Scope	21
2. Overview	22
2.1. Name	22
2.2. Informal description	22
2.2.1. Utility networks	22
2.2.2. Administrative and social governmental services	23
2.2.3. Environmental management facilities	25
2.3. Normative References	29
2.4. Terms and definitions	30
2.5. Symbols and abbreviations	30
2.6. How the Technical Guidelines map to the Implementing Rules	30
2.6.1. Requirements	31
2.6.2. Recommendations	32
2.6.3. Conformance	32
3. Specification scopes	33
4. Identification information	34
5. Data content and structure	35
5.1. Application schemas – Overview	38
5.1.1. Application schemas included in the IRs	38
5.1.2. Additional recommended application schemas	40
5.2. Basic notions	41
5.2.1. Notation	41
5.2.1.1. Unified Modeling Language (UML)	41
5.2.1.2. Stereotypes	42
5.2.2. Voidable characteristics	43
5.2.3. Code lists	44
5.2.3.1. Code list types	44
5.2.3.2. Obligations on data providers	45
5.2.3.3. Recommended code list values	46
5.2.3.4. Governance	46
5.2.3.5. Vocabulary	47
5.2.4. Identifier management	48
5.2.5. Geometry representation	48
5.2.6. Temporality representation	50
5.2.6.1. Validity of the real-world phenomena	51
5.3. Application schema Administrative and Social Governmental Services	51
5.3.1. Description	51
5.3.1.1. Narrative description	51

5.3.1.2. UML Overview	53
5.3.1.3. Consistency between spatial data sets	54
5.3.1.4. Identifier management	54
5.3.1.5. Modelling of object references	54
5.3.1.6. Geometry representation	55
5.3.2. Feature catalogue	55
5.3.2.1. Spatial object types	55
5.3.2.1.1. <i>GovernmentalService</i>	55
5.3.2.2. Data types	58
5.3.2.2.1. <i>AreaOfResponsibilityType</i>	59
5.3.2.2.2. <i>ServiceLocationType</i>	59
5.3.2.3. Code lists	61
5.3.2.3.1. <i>ServiceTypeValue</i>	61
5.3.2.4. Imported types (informative)	61
5.3.2.4.1. <i>ActivityComplex</i>	61
5.3.2.4.2. <i>Address</i>	62
5.3.2.4.3. <i>AdministrativeUnit</i>	65
5.3.2.4.4. <i>Building</i>	65
5.3.2.4.5. <i>Contact</i>	65
5.3.2.4.6. <i>DateTime</i>	65
5.3.2.4.7. <i>GM_MultiSurface</i>	65
5.3.2.4.8. <i>GM_Object</i>	66
5.3.2.4.9. <i>Identifier</i>	66
5.3.2.4.10. <i>NamedPlace</i>	66
5.3.2.4.11. <i>NetworkReference</i>	67
5.3.2.4.12. <i>UtilityNode</i>	67
5.3.3. Externally governed code lists	67
5.4. Application schema Extended Administrative and Social Governmental Services	67
5.4.1. Narrative description	67
5.4.1.1. UML Overview	67
5.4.1.2. Consistency between spatial data sets	68
5.4.1.3. Identifier management	68
5.4.2. Feature catalogue	68
5.4.2.1. Data types	69
5.4.2.1.1. <i>OccupancyType</i>	69
5.4.2.1.2. <i>ResourceType</i>	69
5.4.2.2. Code Lists	70
5.4.2.2.1. <i>ServiceLevelValue</i>	70
5.4.2.3. Imported types (informative)	70
5.4.2.3.1. <i>Integer</i>	70
5.4.2.3.2. <i>Measure</i>	71

5.4.2.3.3. PT_FreeText	71
5.4.3. Externally governed code lists	71
5.5. Application schema Environmental Management Facilities	71
5.5.1. Description	71
5.5.1.1. Narrative description	71
5.5.1.2. UML Overview	75
5.5.1.3. Consistency between spatial data sets	78
5.5.1.4. Identifier management	78
5.5.1.5. <i>Modelling of object references</i>	79
5.5.1.6. Geometry representation	79
5.5.1.7. Temporality representation	80
5.5.2. Feature catalogue	80
5.5.2.1. Spatial object types	80
5.5.2.1.1. <i>EnvironmentalManagementFacility</i>	80
5.5.2.2. Code lists	84
5.5.2.2.1. <i>EnvironmentalManagementFacilityTypeValue</i>	84
5.5.2.3. Imported types (informative)	84
5.5.2.3.1. <i>ActivityComplex</i>	84
5.5.2.3.2. <i>ActivityComplexDescription</i>	85
5.5.2.3.3. <i>Capacity</i>	85
5.5.2.3.4. <i>ConditionOfFacilityValue</i>	86
5.5.2.3.5. <i>PT_FreeText</i>	86
5.5.2.3.6. <i>Permission</i>	86
5.5.3. Externally governed code lists	87
5.6. Application Schemas "Utility Networks"	87
5.7. "Common Utility Networks Elements" application schema	91
5.7.1. Description	91
5.7.1.1. Narrative description	92
5.7.1.2. UML Overview	93
5.7.1.3. Consistency between spatial data sets	95
5.7.1.4. Identifier management	95
5.7.1.5. Modelling of object references	95
5.7.1.6. Geometry representation	95
5.7.1.7. Temporality representation	97
5.7.2. Feature catalogue	97
5.7.2.1. Spatial object types	98
5.7.2.1.1. <i>Appurtenance</i>	98
5.7.2.1.2. <i>Cabinet</i>	99
5.7.2.1.3. <i>Cable</i>	99
5.7.2.1.4. <i>Duct</i>	100
5.7.2.1.5. <i>Manhole</i>	101

5.7.2.1.6. <i>Pipe</i>	102
5.7.2.1.7. <i>Pole</i>	103
5.7.2.1.8. <i>Tower</i>	104
5.7.2.1.9. <i>UtilityLink</i>	104
5.7.2.1.10. <i>UtilityLinkSequence</i>	105
5.7.2.1.11. <i>UtilityLinkSet</i>	105
5.7.2.1.12. <i>UtilityNetwork</i>	106
5.7.2.1.13. <i>UtilityNetworkElement</i>	109
5.7.2.1.14. <i>UtilityNode</i>	111
5.7.2.1.15. <i>UtilityNodeContainer</i>	112
5.7.2.2. Code lists	113
5.7.2.2.1. <i>AppurtenanceTypeValue</i>	113
5.7.2.2.2. <i>SpecificAppurtenanceTypeValue</i>	113
5.7.2.2.3. <i>UtilityDeliveryTypeValue</i>	113
5.7.2.2.4. <i>UtilityNetworkTypeValue</i>	114
5.7.2.2.5. <i>WarningTypeValue</i>	114
5.7.2.3. Imported types (informative)	114
5.7.2.3.1. <i>ActivityComplex</i>	115
5.7.2.3.2. <i>ConditionOfFacilityValue</i>	115
5.7.2.3.3. <i>DateTime</i>	115
5.7.2.3.4. <i>ElectricityAppurtenanceTypeValue</i>	116
5.7.2.3.5. <i>GM_Point</i>	116
5.7.2.3.6. <i>GovernmentalService</i>	116
5.7.2.3.7. <i>Identifier</i>	117
5.7.2.3.8. <i>Length</i>	118
5.7.2.3.9. <i>Link</i>	118
5.7.2.3.10. <i>LinkSequence</i>	118
5.7.2.3.11. <i>LinkSet</i>	119
5.7.2.3.12. <i>Measure</i>	119
5.7.2.3.13. <i>Network</i>	120
5.7.2.3.14. <i>Node</i>	120
5.7.2.3.15. <i>OilGasChemicalsAppurtenanceTypeValue</i>	120
5.7.2.3.16. <i>PT_FreeText</i>	120
5.7.2.3.17. <i>RelatedParty</i>	121
5.7.2.3.18. <i>SewerAppurtenanceTypeValue</i>	121
5.7.2.3.19. <i>ThermalAppurtenanceTypeValue</i>	121
5.7.2.3.20. <i>VerticalPositionValue</i>	121
5.7.2.3.21. <i>WaterAppurtenanceTypeValue</i>	121
5.7.3. Externally governed code lists	122
5.8. "Electricity Network" application schema	122
5.8.1. Description	122

5.8.1.1. Narrative Description	122
5.8.1.2. UML Overview	122
5.8.2. Feature catalogue	123
5.8.2.1. Spatial object types	124
5.8.2.1.1. <i>ElectricityCable</i>	124
5.8.2.2. Code lists	124
5.8.2.2.1. <i>ElectricityAppurtenanceTypeValue</i>	124
5.8.2.3. Imported types (informative)	125
5.8.2.3.1. <i>Cable</i>	125
5.8.2.3.2. <i>Measure</i>	125
5.8.3. Externally governed code lists	125
5.9. "Oil-Gas-Chemicals Network" application schema	125
5.9.1. Description	125
5.9.1.1. Narrative Description	125
5.9.1.2. UML Overview	126
5.9.2. Feature catalogue	126
5.9.2.1. Spatial object types	127
5.9.2.1.1. <i>OilGasChemicalsPipe</i>	127
5.9.2.2. Code lists	127
5.9.2.2.1. <i>OilGasChemicalsAppurtenanceTypeValue</i>	127
5.9.2.2.2. <i>OilGasChemicalsProductTypeValue</i>	128
5.9.2.3. Imported types (informative)	128
5.9.2.3.1. <i>Pipe</i>	128
5.9.3. Externally governed code lists	129
5.10. "Sewer Network" application schema	129
5.10.1. Description	129
5.10.1.1. Narrative Description	129
5.10.1.2. UML Overview	129
5.10.2. Feature catalogue	130
5.10.2.1. Spatial object types	130
5.10.2.1.1. <i>SewerPipe</i>	131
5.10.2.2. Code lists	131
5.10.2.2.1. <i>SewerAppurtenanceTypeValue</i>	131
5.10.2.2.2. <i>SewerWaterTypeValue</i>	131
5.10.2.3. Imported types (informative)	132
5.10.2.3.1. <i>Pipe</i>	132
5.10.3. Externally governed code lists	132
5.11. "Thermal Network" application schema	132
5.11.1. Description	132
5.11.1.1. Narrative Description	132
5.11.1.2. UML Overview	133

5.11.2. Feature catalogue	133
5.11.2.1. Spatial object types	134
5.11.2.1.1. <i>ThermalPipe</i>	134
5.11.2.2. Code lists	134
5.11.2.2.1. <i>ThermalAppurtenanceTypeValue</i>	134
5.11.2.3. Imported types (informative)	134
5.11.2.3.1. <i>Pipe</i>	135
5.11.2.3.2. <i>ThermalProductTypeValue</i>	135
5.11.3. Externally governed code lists	135
5.12. "Water Network" application schema	135
5.12.1. Description	135
5.12.1.1. Narrative Description	135
5.12.1.2. UML Overview	136
5.12.2. Feature catalogue	136
5.12.2.1. Spatial object types	137
5.12.2.1.1. <i>WaterPipe</i>	137
5.12.2.2. Code lists	137
5.12.2.2.1. <i>WaterAppurtenanceTypeValue</i>	137
5.12.2.2.2. <i>WaterTypeValue</i>	137
5.12.2.3. Imported types (informative)	138
5.12.2.3.1. <i>Pipe</i>	138
5.12.3. Externally governed code lists	138
6. Reference systems, units of measure and grids	139
6.1. Default reference systems, units of measure and grid	139
6.1.1. Coordinate reference systems	139
6.1.1.1. Datum	139
6.1.1.2. Coordinate reference systems	139
6.1.1.3. Display	141
6.1.1.4. Identifiers for coordinate reference systems	141
6.1.2. Temporal reference system	142
6.1.3. Units of measure	142
6.2. Theme-specific requirements and recommendations	142
7. Data quality	143
7.1. Data quality elements	143
7.1.1. Completeness – Commission	145
7.1.2. Completeness – Omission	146
7.1.3. Logical consistency – Conceptual consistency	147
7.1.4. Logical consistency – Domain consistency	148
7.1.5. Logical Consistency – Format consistency	148
7.1.6. Logical Consistency – Topological consistency	149
7.1.7. Positional accuracy – Absolute or external accuracy	154

7.1.8. Positional accuracy – Relative or internal accuracy	157
7.1.9. Thematic accuracy – Classification correctness	159
7.1.10. Thematic accuracy – Non-quantitative attribute correctness	160
7.1.11. Thematic accuracy – Quantitative attribute accuracy	160
7.1.12. Temporal quality – Accuracy of a time measurement	162
7.1.13. Temporal quality – Temporal consistency	164
7.2. Minimum data quality requirements	165
7.3. Recommendation on data quality	165
8. Dataset-level metadata	166
8.1. Metadata elements defined in INSPIRE Metadata Regulation	166
8.1.1. Conformity	167
8.1.2. Lineage	170
8.1.3. Temporal reference	171
8.2. Metadata elements for interoperability	171
8.2.1. Coordinate Reference System	172
8.2.2. Temporal Reference System	174
8.2.3. Encoding	175
8.2.4. Character Encoding	176
8.2.5. Spatial representation type	176
8.2.6. Data Quality – Logical Consistency – Topological Consistency	177
8.3. Recommended theme-specific metadata elements	177
8.3.1. Maintenance Information	178
8.3.2. Metadata elements for reporting data quality	179
8.3.2.1. Guidelines for reporting quantitative results of the data quality evaluation	180
8.3.2.2. Guidelines for reporting descriptive results of the Data Quality evaluation	180
9. Delivery	182
9.1. Updates	182
9.2. Delivery medium	182
9.3. Encodings	183
9.3.1. Default Encoding(s)	184
9.3.1.1. Specific requirements for GML encoding	184
9.3.1.2. Default encoding for application schema AdministrativeAndSocialGovernmentalServices	184
9.3.1.3. Default encoding for application schema ExtensionAdministrativeAndSocialGovernmentalServices	184
9.3.1.4. Default encoding for application schema EnvironmentalManagementFacilities	185
9.3.1.5. Default encoding for application schema CommonUtilityNetworkElements	185
9.3.1.6. Default encoding for application schema Electricity Network	185
9.3.1.7. Default encoding for application schema Oil-Gas-Chemicals Network	185
9.3.1.8. Default encoding for application schema Sewer Network	185
9.3.1.9. Default encoding for application schema Thermal Network	186

9.3.1.10. Default encoding for application schema Water Network	186
10. Data Capture	187
11. Portrayal	190
11.1. Layers to be provided by INSPIRE view services	191
11.1.1. Layers organisation	192
11.2. Styles required to be supported by INSPIRE view services	193
11.2.1. Styles for the layer "Administrative and social governmental services"	193
11.2.2. Styles for the layer "Environmental Management Facilities"	195
11.3. Other recommended styles	197
Bibliography	198
Annex A: Abstract Test Suite - (normative)	199
A.1. Application Schema Conformance Class	202
A.1.1. Schema element denomination test	202
A.1.2. Value type test	203
A.1.3. Value test	203
A.1.4. Attributes/associations completeness test	204
A.1.5. Abstract spatial object test	204
A.1.6. Constraints test	204
A.1.7. Geometry representation test	204
A.2. Reference Systems Conformance Class	205
A.2.1. Datum test	205
A.2.2. Coordinate reference system test	205
A.2.3. View service coordinate reference system test	206
A.2.4. Temporal reference system test	206
A.2.5. Units of measurements test	207
A.3. Data Consistency Conformance Class	207
A.3.1. Unique identifier persistency test	207
A.3.2. Version consistency test	207
A.3.3. Life cycle time sequence test	208
A.3.4. Validity time sequence test	208
A.3.5. Update frequency test	208
A.4. Data Quality Conformance Class	209
A.5. Metadata IR Conformance Class	209
A.5.1. Metadata for interoperability test	209
A.6. Information Accessibility Conformance Class	209
A.6.1. Code list publication test	209
A.6.2. CRS publication test	210
A.6.3. CRS identification test	210
A.7. Data Delivery Conformance Class	210
A.7.1. Encoding compliance test	210
A.8. Portrayal Conformance Class	210

A.8.1. Layer designation test	211
A.9. Technical Guideline Conformance Class	211
A.9.1. Multiplicity test	212
A.9.2. CRS http URI test	212
A.9.3. Metadata encoding schema validation test	212
A.9.4. Metadata occurrence test	212
A.9.5. Metadata consistency test	213
A.9.6. Encoding schema validation test	213
A.9.7. Style test	213
Annex B: Use cases - (informative)	214
B.1. Use case for "Utility networks"	214
B.1.1. <i>Introduction</i>	214
B.1.2. <i>Use case description: Use case TWG_US_UN_KLIP</i>	215
B.2. Use case for "Administrative and social governmental services"	218
B.2.1. <i>Introduction</i>	218
B.2.2. <i>Use case TWG_US_GS_Map_case</i>	219
B.2.3. <i>Use case TWG_US_GS_Data_case</i>	221
B.2.4. <i>Use Case: SITMAP – Territorial Information System of Málaga Province (Spain)</i>	224
B.3. Use case for "Waste Management"	226
B.3.1. <i>Introduction</i>	226
B.3.2. <i>Use case description: Use case Waste Management Plans and Waste Shipments.</i>	227
B.3.3. <i>Cross Thematic Data requirements</i>	242
Annex C: Code list values - (normative)	248
C.1. INSPIRE Application Schema 'AdministrativeAndSocialGovernmentalServices'	248
C.2. INSPIRE Application Schema 'Environmental Management Facilities'	248
C.3. INSPIRE Application Schema 'Common Utility Network Elements'	249
C.4. INSPIRE Application Schema 'Electricity Network'	250
C.5. INSPIRE Application Schema 'Oil-Gas-Chemicals Network'	250
C.6. INSPIRE Application Schema 'Sewer Network'	251
C.7. INSPIRE Application Schema 'Thermal Network'	252
C.8. INSPIRE Application Schema 'Water Network'	252
Annex D: ServiceTypeValue codelist - (informative)	254
Annex E: Checklists for data interoperability - (informative)	257
Annex F: Portrayal analysis - (informative)	258
Annex G: Extended Utility Networks Application Schemas - (informative)	259
G.1. "Common Extended Utility Networks Elements" application schema	259
G.1.1. <i>UML Overview</i>	259
G.1.2. <i>Feature catalogue</i>	259
G.1.2.1. <i>Spatial object types</i>	261
G.1.2.1.1. <i>CabinetExtended</i>	261
G.1.2.1.2. <i>CableExtended</i>	262

G.1.2.1.3. DuctExtended	262
G.1.2.1.4. ManholeExtended	263
G.1.2.1.5. PipeExtended	265
G.1.2.1.6. PoleExtended	266
G.1.2.2. Code lists	269
G.1.2.2.1. DuctTypeValue	269
G.1.2.2.2. ManholeCoverOpeningTypeValue	269
G.1.2.2.3. ManholeCoverShapeTypeValue	270
G.1.2.2.4. ManholeShaftAccessTypeValue	270
G.1.2.2.5. ManholeShaftMaterialTypeValue	271
G.1.2.2.6. ManholeTypeValue	271
G.1.2.2.7. PipeCoatingTypeValue	271
G.1.2.2.8. PipeMaterialTypeValue	272
G.1.2.2.9. PipeShapeTypeValue	272
G.1.2.2.10. PoleFoundationTypeValue	272
G.1.2.2.11. PoleMaterialTypeValue	273
G.1.2.2.12. PoleTypeValue	273
G.1.2.3. Imported types (informative)	273
G.1.2.3.1. Boolean	273
G.1.2.3.2. Cabinet	274
G.1.2.3.3. Cable	274
G.1.2.3.4. Duct	274
G.1.2.3.5. DuctCasingTypeValue	274
G.1.2.3.6. Integer	275
G.1.2.3.7. Length	275
G.1.2.3.8. Manhole	275
G.1.2.3.9. Measure	275
G.1.2.3.10. Pipe	276
G.1.2.3.11. Pole	276
G.1.2.3.12. UtilityNodeContainer	276
G.1.2.3.13. codevalue	276
G.2. "Extended Electricity Network" application schema	277
G.2.1. UML Overview	277
G.2.2. Feature catalogue	277
G.2.2.1. Spatial object types	278
G.2.2.1.1. ElectricityCableExtended	278
G.2.2.2. Code lists	278
G.2.2.2.1. ElectricityCableConductorMaterialTypeValue	278
G.2.2.2.2. ElectricityCableTypeValue	279
G.2.2.3. Imported types (informative)	279
G.2.2.3.1. ElectricityCable	279

G.2.2.3.2. Length	280
G.3. "Extended Oil-Gas-Chemicals Network" application schema	280
G.3.1. UML Overview	280
G.3.2. Feature catalogue	281
G.3.2.1. Spatial object types	282
G.3.2.1.1. OilGasChemicalsPipeExtended	282
G.3.2.2. Code lists	282
G.3.2.2.1. OilGasChemicalsPipeTypeValue	282
G.3.2.3. Imported types (informative)	283
G.3.2.3.1. Measure	283
G.3.2.3.2. OilGasChemicalsPipe	283
G.3.2.3.3. Volume	283
G.4. "Extended Thermal Network" application schema	284
G.4.1. UML Overview	284
G.4.2. Feature catalogue	284
G.4.2.1. Spatial object types	285
G.4.2.1.1. ThermalPipeExtended	285
G.4.2.2. Code lists	285
G.4.2.2.1. ThermalAppurtenanceTypeExtendedValue	285
G.4.2.2.2. ThermalPipeTypeValue	286
G.4.2.2.3. ThermalProductTypeExtendedValue	286
G.4.2.3. Imported types (informative)	287
G.4.2.3.1. ThermalPipe	287
G.5. "Extended Water Network" application schema	287
G.5.1. UML Overview	287
G.5.2. Feature catalogue	288
G.5.2.1. Spatial object types	288
G.5.2.1.1. WaterPipeExtended	288
G.5.2.2. Code lists	289
G.5.2.2.1. WaterPipeTypeValue	289
G.5.2.3. Imported types (informative)	290
G.5.2.3.1. Measure	290
G.5.2.3.2. Volume	290
G.5.2.3.3. WaterPipe	290
G.6. "Extended Sewer Network" application schema	291
G.6.1. UML Overview	291
G.6.2. Feature catalogue	291
G.6.2.1. Spatial object types	292
G.6.2.1.1. SewerPipeExtended	292
G.6.2.2. Code lists	292
G.6.2.2.1. SewerPipeTypeValue	292

G.6.2.3. Imported types (informative)	293
G.6.2.3.1. Measure	293
G.6.2.3.2. SewerPipe	293
G.6.2.3.3. Volume	293
Annex H: "Telecommunications Network" Application Schema - (informative)	295
H.1. UML Overview	295
H.2. Feature catalogue	295
H.2.1. Spatial object types	296
H.2.1.1. TelecommunicationsCable	296
H.2.2. Code lists	296
H.2.2.1. TelecommunicationsAppurtenanceTypeValue	296
H.2.2.2. TelecommunicationsCableMaterialTypeValue	297
H.2.3. Imported types (informative)	297
H.2.3.1. Cable	297
H.3. INSPIRE-governed code lists	298
H.3.1. Values of code list TelecommunicationsAppurtenanceTypeValue	298
H.3.2. Values of code list TelecommunicationsCableMaterialTypeValue	305

1. Scope

This document specifies a harmonised data specification for the spatial data theme *Utility and Government Services* as defined in Annex III of the INSPIRE Directive.

This data specification provides the basis for the drafting of Implementing Rules according to Article 7 (1) of the INSPIRE Directive [Directive 2007/2/EC]. The entire data specification is published as implementation guidelines accompanying these Implementing Rules.

2. Overview

2.1. Name

INSPIRE data specification for the theme *Utility and Government Services*.

2.2. Informal description

Definition:

"Includes utility facilities such as sewage, waste management, energy supply and water supply, administrative and social governmental services such as public administrations, civil protection sites, schools and hospitals." [Directive 2007/2/EC]

2.2.1. Utility networks

Comprehension of the scope

Utility services and networks include the physical constructions for transport of defined utility products (namely pipelines for transport of oil, gas, chemicals, water, sewage and thermal products), transmission lines and cables (included those for transmission of electricity, phone and cable-TV signals) and other network elements for encasing pipes and cases (e.g. ducts, poles and towers).

All kinds of transmission utility systems have nodes (e.g. pump stations), and they are linked to facilities for production and treatment of different kinds of utility products. These major production and treatment sites are described in the theme production and industrial facilities (Annex.III – PF).

Six important types of utility networks are distinguished, namely Electricity Network, Oil, Gas & Chemicals Network, Sewer Network, Telecommunications Network, Thermal Network and Water Network.

All these networks use the node-arc-node model, as defined in the Generic Network Model. Especially designed for a structured modelization of utility networks that allows its business use (estimation of propagation, calculation of capacities, etc.), the use of this node-arc-node model is also adapted for non-topological data, since the relation between nodes and arcs is optional.

Different organizations have different responsibilities and this will influence the kind of data they collect, manage and use. Some organizations will use simple models while other will have more complex data models. This data specification is a basic framework that user can adopt and, if necessary, adapt and extend for themselves. The specification is focused on the core spatial objects required by networks, i.e. network centerlines etc.

In the utility services and networks there are "ducts", which are utility links used to protect and guide cable and pipes via an encasing construction. A duct may contain other duct(s), pipes and cables. "Duct" contains information about the position and characteristics of ducts as seen from a manhole, vault, or a cross section of a trench and duct.

The nodes of the networks include poles. Poles represent node objects that support utility devices and cables. "Pole" is a container to other utility objects. Other important nodes are manholes, towers and cabinets. A "Manhole" is the top openings to an underground public utility or service. A "Tower" is a vertical tower object that carries utility cables or pipes. A "Cabinet" is container for utility node objects (e.g. appurtenances). Poles, manholes, towers and cabinets represent containers for other network elements belonging to one or more utility networks.

Overlaps / links with other themes

This sub-theme might overlap with themes:

- Hydrography (A-I.8)
- Buildings (A-III.2)
- Land use (A-III.4)
- Environmental monitoring facilities (like treatment plants/pumping stations) (A-III.7)
- Production and industrial facilities (A-III.8)
- Energy resources (A-III.20)

Current sub-theme holds potential dependencies with the following themes:

- Annex I
 - Coordinate reference systems (geo-referencing of the point)
 - Geographical grid systems (geo-referencing of the point)
 - Geographical names (Identification of the point and of the place where it is located)
 - Administrative units (that contain the point)
 - Addresses (referencing of the point)
 - Cadastral parcels (that contain the given service and from which the service is provided)
 - Transport networks (that provide access to/from the services)
 - Protected sites (that may contain services or being potential receptors of these)
- Annex II
 - Elevation (referencing of the point)
- Annex III
 - Statistical units (that contain the point)
 - Buildings (that contain the given service and from which the service is provided)
 - Population distribution – demography (potential service "clients")
 - Utilities (that the service make use/depend on)

2.2.2. Administrative and social governmental services

Comprehension of the scope

According to the INSPIRE Directive, the scope of the sub-theme comprises "... administrative and

social governmental services such as public administrations, civil protection sites, schools and hospitals. [Annex III]."

On another hand, INSPIRE document "Definition of Annex Themes and Scope v3.0 (D 2.3)" details governmental services as those fitting the following description:

"Administrative and social governmental services such as public administrations, civil protection sites, schools, hospitals. The kind of sites that are commonly presented in governmental and municipal portals and map systems as "points of interest"-data (POI), and may be point-based location of a variety of categories of municipal and governmental services and social infrastructure".

Given this description and, very specially, the concrete mention to the use of this type of data as POI, a wide interpretation of what "administrative and social governmental services" should be done.

In this same sense, the following words from the manual of the Spanish EIEL (Spanish acronym for Enquiry on Local Infrastructures and Services) database, which does also contain information on public services, may be considered as highly relevant: "(...)The variety of ways how public services are provided and the correspondent variety in facilities management, as well as the concurrent activity of different Public Administration bodies, do recommend having in mind a broad scope on what are the utilities and services that are collectively facing the same needs".

Eligibility criteria

To identify the relevant service types, legal requirements (mainly the wording of the INSPIRE directive itself) as well as requirements based on use cases have to be considered. In detail a list of relevant criteria has been defined. Thus service types are within the scope, when they are

- explicitly mentioned in the INSPIRE directive Annex III ("such as public administrations, civil protection sites, schools and hospitals") or
- in a common understanding covered by the general scope of the annex theme ("administrative and social governmental services") and which are similar to the explicitly mentioned ones (e.g. kindergarten) or
- covered by the general scope of the annex theme (partly in a broader sense of "public" service) and which obviously address environmental issues (e.g. environmental education center) or
- generally considered as "social governmental services" (e.g. specialized service for the disabled) or
- in a common understanding covered by the general scope of the annex theme and whose main purpose is to provide services for environmental risk/disaster assessment/management (e.g. civil protection sites) or
- in a common understanding covered by the general scope of the annex theme and which are the most important means of governments to manage (environmental) disaster events (e.g. police services).

Aside, there are a lot of public services (in a broader sense), whose main purpose is not to provide services in environmental disaster events but can be used in these situations, like sports halls or fair venues. For example, thousands of people took shelter in the New Orleans' Superdome during the hurricane Katrina. Despite this, these sites are neither seen first and foremost as

"administrative and social governmental services" nor do they have an environmental context. Therefore, they are not considered to be within the scope of this data specification.

Furthermore, some "administrative and social governmental services" can be regarded as especially "vulnerable" to environmental disasters. This aspect is covered by the "Natural risk zones" theme and therefore out of scope of this data specification.

In opposite to the criteria listed above, the fact whether the service is provided by a Public Administration Body (PAB) or by private institutions is not a relevant criterion. Very often, administrative and social governmental services are not provided by the PAB itself but by a private institution as a matter of public interest. In many cases, this varies from Member State to Member State, from region to region and from municipality to municipality.

Overlaps / links with other themes

Overlaps: This sub-theme overlaps the following ones:

- Buildings (A-III.2), e.g. use of buildings
- Human health and safety (A-III.5), e.g. hospitals
- Natural risk zones (A-III.12), e.g. a number of governmental services can be considered as vulnerable elements too (e.g. schools)

Links and dependencies: The sub-theme holds potential dependencies with the following themes, primarily in order to provide the spatial reference of the services respectively the (spatial) area of responsibility of the service

- Annex I
 - Coordinate reference systems
 - Geographical names
 - Administrative units
 - Addresses
- Annex III
 - Buildings

2.2.3. Environmental management facilities

Comprehension of the scope

The INSPIRE Directive "Definition of Annex Themes and Scope v3.0 (D 2.3)" states that this sub-theme comprises several categories in order to identify the environmental protection facilities. Categories such as waste treatment sites, waste treatment facilities, regulated and illegal areas for dumping, mining waste and sewage sludge are mentioned as categories to be included. The use cases also indicate the need for providing information on waste treatment, storage and disposal.

The sub-theme scope therefore includes all the facilities involved or/and requested by law to be registered on the management of all kind of wastes of the "European Waste Catalogue and Hazardous Waste List". Locations of the facilities are given by point or polygon. The waste

management facilities are referred to either as installations or sites, where an installation is understood as a stationary unit where one or more waste management activities are carried out, or any other directly associated activities. The site is understood as a single location, in which certain infrastructure and facilities are shared, and where waste management activities take place.

All of the following is considered relevant for the scope: The function of the environmental facility, expressed as economic activity (typically as waste management activity), permissions, inputs and outputs. In addition, information on service hours and capacities are also linked to facility, as well as operators, owners, contacts, and competent authorities.

Waste management activities are distinguished by categories such as storage, recovery, and/or disposal of waste. Economic activities can be categorized by entries of the NACE catalogue (Classification of Economic Activities in the European Community), particularly those under the 'E'-Group "Water supply; sewerage; waste management and remediation activities". The Eurostat CPA list of products (Annex to Regulation (EC) n. 451/2008) is used for the classification of output products.

The Environmental Management Facilities Model is based on the Generic Activity Complex Model and in the Data Types described on it as potential extensions.

Organization of information

The following types of data are within the scope of the TWG-US sub-theme. They are provided with links to reference documents that illustrate which user requirements the type of data originate from.

- Discharge [9] (of waste water)
- Disposal [1] (of waste)
- Dumping [1] (of waste at sea)
- Facility [3] (of waste production, treatment, storage)
- Hazardous waste [1]
- Incineration [8] (of waste)
- Installation [3]
- Landfill [13] (of waste)
- Non-hazardous waste [1]
- Plant [8] (of waste production, treatment, storage)
- Radioactive waste [14]
- Recovery [1] (of waste)
- Site [3] (of waste production, treatment, storage)
- Storage [8] (of waste)
- Treatment [1] (of waste or waste water)
- Transfer [3],[4] (of waste)
- Waste [1]

- Waste water [9]

Data out of scope:

- Emissions [2]
- Exhaust gas [8]
- Flooding
- Pollutants [3]

Dependencies and Overlaps

The following overlaps with other Feature Types have been identified:

- Buildings: Certain environmental management facilities may be regarded as buildings (and vice versa).
- Production and Industrial Facilities: A production facility may be an environmental management facility, for instance in cases where waste is used as fuel.
-

Land use: Dumping of waste onto land and landfills may be seen as overlapping with land use

Reference documents

[1] Directive 2008/98/EC of the European Parliament and of the Council of 19 November 2008 on waste

[2] Directive 2008/1/EC of the European Parliament and of the Council of 15 January 2008 concerning integrated pollution prevention and control

[3] Regulation (EC) No 166/2006 of the European Parliament and of the Council of 18 January 2006 concerning the establishment of a European Pollutant Release and Transfer Register

[4] Regulation (EC) No 1013/2006 of the European Parliament and of the Council of 14 June 2006 on shipments of waste

[5] Directive 2006/66/EC of the European Parliament and of the Council of 6 September 2006 on batteries and accumulators and waste batteries and accumulators

[6] Directive 2006/21/EC of the European Parliament and of the Council of 15 March 2006 on the management of waste from extractive industries and amending Directive 2004/35/EC - Statement by the European Parliament, the Council and the Commission

[7] Regulation (EC) No 2150/2002 of the European Parliament and of the Council of 25 November 2002 on waste statistics

[8] Directive 2002/96/EC of the European Parliament and of the Council of 27 January 2003 on waste electrical and electronic equipment (WEEE)

[9] 2000/532/EC: Commission Decision of 3 May 2000 replacing Decision 94/3/EC establishing a list of

wastes pursuant to Article 1(a) of Council Directive 75/442/EEC on waste and Council Decision 94/904/EC establishing a list of hazardous waste pursuant to Article 1(4) of Council Directive 91/689/EEC on hazardous waste (notified under document number C(2000) 1147) (Text with EEA relevance)

[10] Directive 2000/76/EC of the European Parliament and of the Council of 4 December 2000 on the incineration of waste

[11] Directive 2000/60/EC of the European Parliament and of the Council of 23 October 2000 establishing a framework for Community action in the field of water policy

[12] Directive 2000/53/EC of the European Parliament and of the Council of 18 September 2000 on end-of life vehicles

[13] Council Regulation (EEC) No 696/93 of 15 March 1993 on the statistical units for the observation and analysis of the production system in the Community

[14] European Parliament and Council Directive 94/62/EC of 20 December 1994 on packaging and packaging waste

[15] Council Directive 1999/31/EC of 26 April 1999 on the landfill of waste

[16] Council Directive 92/3/Euratom of 3 February 1992 on the supervision and control of shipments of radioactive waste between Member States and into and out of the Community

[17] Council Directive 91/271/EEC of 21 May 1991 concerning urban waste-water treatment

Definition:

"Includes utility facilities such as sewage, waste management, energy supply and water supply, administrative and social governmental services such as public administrations, civil protection sites, schools and hospitals." [Directive 2007/2/EC]

Description:

The theme *Utility and Government Services* provides basic information (e.g. the location, basic technical characteristics or involved parties) on a wide range of administrative and social services of public interest.

The theme is split in the following subthemes:

- Utility Networks: Node-link-node structured networks for collection, transmission and distribution, including electricity, oil/gas and chemicals, sewer, thermal, water or (not mandatory) telecommunications networks;
- Administrative and social governmental services: Local and governmental services and social infrastructures, selected with respect to the INSPIRE scope (focused on public & environmental aspects), represented as "points of interest";
- Environmental management facilities: Generic facility descriptions for waste management sites, water treatment plants and regulated or illegal areas for dumping.

Entry in the INSPIRE registry: <http://inspire.ec.europa.eu/theme/us/>

2.3. Normative References

[Directive 2007/2/EC] Directive 2007/2/EC of the European Parliament and of the Council of 14 March 2007 establishing an Infrastructure for Spatial Information in the European Community (INSPIRE)

[Directive 2008/98/EC] Directive 2008/98/EC of the European Parliament and of the Council of 19 November 2008 on waste and repealing certain Directives

[ISO 19107] EN ISO 19107:2005, Geographic Information – Spatial Schema

[ISO 19108] EN ISO 19108:2005, Geographic Information – Temporal Schema

[ISO 19108-c] ISO 19108:2002/Cor 1:2006, Geographic Information – Temporal Schema, Technical Corrigendum 1

[ISO 19111] EN ISO 19111:2007 Geographic information - Spatial referencing by coordinates (ISO 19111:2007)

[ISO 19113] EN ISO 19113:2005, Geographic Information – Quality principles

[ISO 19115] EN ISO 19115:2005, Geographic information – Metadata (ISO 19115:2003)

[ISO 19118] EN ISO 19118:2006, Geographic information – Encoding (ISO 19118:2005)

[ISO 19123] EN ISO 19123:2007, Geographic Information – Schema for coverage geometry and functions

[ISO 19125-1] EN ISO 19125-1:2004, Geographic Information – Simple feature access – Part 1: Common architecture

[ISO 19135] EN ISO 19135:2007 Geographic information – Procedures for item registration (ISO 19135:2005)

[ISO 19138] ISO/TS 19138:2006, Geographic Information – Data quality measures

[ISO 19139] ISO/TS 19139:2007, Geographic information – Metadata – XML schema implementation

[ISO 19157] ISO/DIS 19157, Geographic information – Data quality

[OGC 06-103r4] Implementation Specification for Geographic Information - Simple feature access – Part 1: Common Architecture v1.2.1

NOTE This is an updated version of "EN ISO 19125-1:2004, Geographic information – Simple feature access – Part 1: Common architecture".

[Regulation 1205/2008/EC] Regulation 1205/2008/EC implementing Directive 2007/2/EC of the European Parliament and of the Council as regards metadata

[Regulation 976/2009/EC] Commission Regulation (EC) No 976/2009 of 19 October 2009

implementing Directive 2007/2/EC of the European Parliament and of the Council as regards the Network Services

[Regulation 1089/2010/EC] Commission Regulation (EU) No 1089/2010 of 23 November 2010 implementing Directive 2007/2/EC of the European Parliament and of the Council as regards interoperability of spatial data sets and services

[Regulation 166/2006/EC] Regulation (EC) No 166/2006 of the European Parliament and of the Council of 18 January 2006 concerning the establishment of a European Pollutant Release and Transfer Register and amending Council Directives 91/689/EEC and 96/61/EC

2.4. Terms and definitions

General terms and definitions helpful for understanding the INSPIRE data specification documents are defined in the INSPIRE Glossary^[14].

2.5. Symbols and abbreviations

2.6. How the Technical Guidelines map to the Implementing Rules

The schematic diagram in Figure 1 gives an overview of the relationships between the INSPIRE legal acts (the INSPIRE Directive and Implementing Rules) and the INSPIRE Technical Guidelines. The INSPIRE Directive and Implementing Rules include legally binding requirements that describe, usually on an abstract level, *what* Member States must implement.

In contrast, the Technical Guidelines define *how* Member States might implement the requirements included in the INSPIRE Implementing Rules. As such, they may include non-binding technical requirements that must be satisfied if a Member State data provider chooses to conform to the Technical Guidelines. Implementing these Technical Guidelines will maximise the interoperability of INSPIRE spatial data sets.

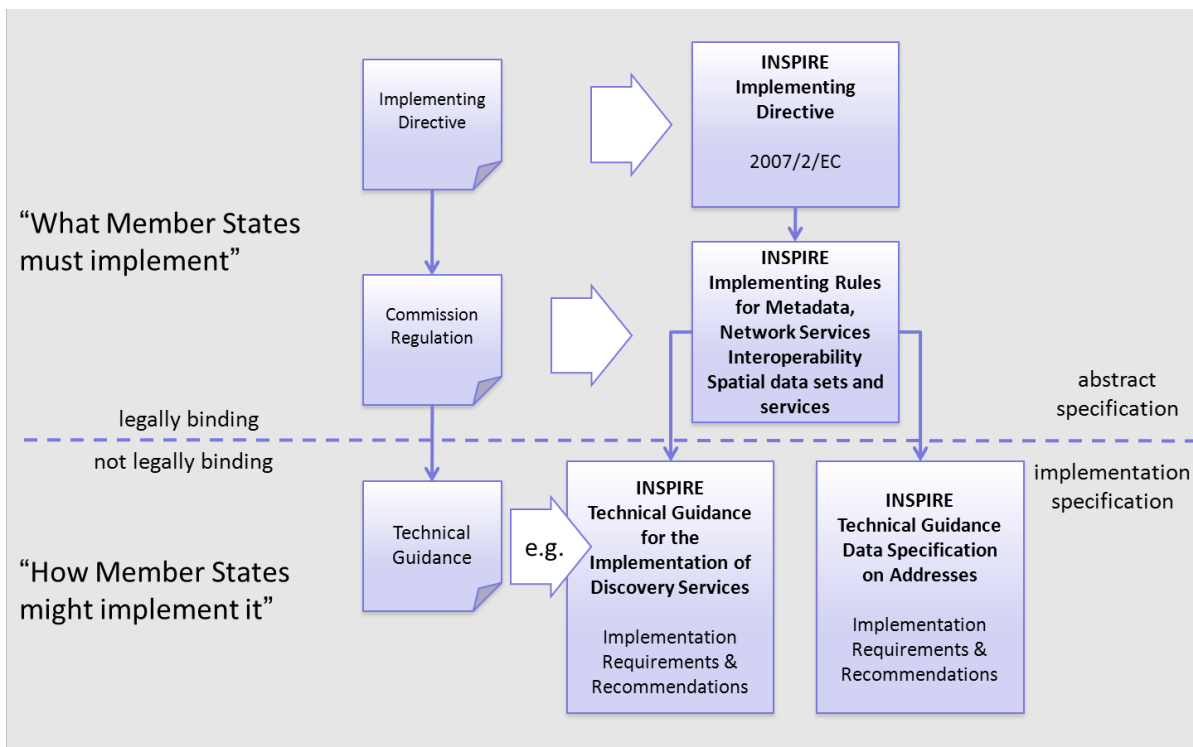


Figure 1 - Relationship between INSPIRE Implementing Rules and Technical Guidelines

2.6.1. Requirements

The purpose of these Technical Guidelines (Data specifications on *Utility and Government Services*) is to provide practical guidance for implementation that is guided by, and satisfies, the (legally binding) requirements included for the spatial data theme *Utility and Government Services* in the Regulation (Implementing Rules) on interoperability of spatial data sets and services. These requirements are highlighted in this document as follows:



IR Requirement

Article / Annex / Section no.

Title / Heading

This style is used for requirements contained in the Implementing Rules on interoperability of spatial data sets and services (Commission Regulation (EU) No 1089/2010).

For each of these IR requirements, these Technical Guidelines contain additional explanations and examples.

NOTE The Abstract Test Suite (ATS) in Annex A contains conformance tests that directly check conformance with these IR requirements.

Furthermore, these Technical Guidelines may propose a specific technical implementation for satisfying an IR requirement. In such cases, these Technical Guidelines may contain additional technical requirements that need to be met in order to be conformant with the corresponding IR requirement *when using this proposed implementation*. These technical requirements are highlighted as follows:



TG Requirement X

This style is used for requirements for a specific technical solution proposed in these Technical Guidelines for an IR requirement.

NOTE 1 Conformance of a data set with the TG requirement(s) included in the ATS implies conformance with the corresponding IR requirement(s).

NOTE 2 In addition to the requirements included in the Implementing Rules on interoperability of spatial data sets and services, the INSPIRE Directive includes further legally binding obligations that put additional requirements on data providers. For example, Art. 10(2) requires that Member States shall, where appropriate, decide by mutual consent on the depiction and position of geographical features whose location spans the frontier between two or more Member States. General guidance for how to meet these obligations is provided in the INSPIRE framework documents.

2.6.2. Recommendations

In addition to IR and TG requirements, these Technical Guidelines may also include a number of recommendations for facilitating implementation or for further and coherent development of an interoperable infrastructure.



Recommendation X

Recommendations are shown using this style.

NOTE The implementation of recommendations is not mandatory. Compliance with these Technical Guidelines or the legal obligation does not depend on the fulfilment of the recommendations.

2.6.3. Conformance

Annex A includes the abstract test suite for checking conformance with the requirements included in these Technical Guidelines and the corresponding parts of the Implementing Rules (Commission Regulation (EU) No 1089/2010).

3. Specification scopes

This data specification does not distinguish different specification scopes, but just considers one general scope.

NOTE For more information on specification scopes, see [ISO 19131:2007], clause 8 and Annex D.

4. Identification information

These Technical Guidelines are identified by the following URI:

<http://inspire.ec.europa.eu/tg/us/3.0>

NOTE ISO 19131 suggests further identification information to be included in this section, e.g. the title, abstract or spatial representation type. The proposed items are already described in the document metadata, executive summary, overview description (section 2) and descriptions of the application schemas (section 5). In order to avoid redundancy, they are not repeated here.

5. Data content and structure

The INSPIRE theme *Utility and governmental services* has been split in 3 separate main packages, that are developed hereafter.

Though main features of the 3 sub-themes have common concepts related to the theme (such as localization, technical description and responsible party), they were treated separately with different modelization approaches within 3 nearly independent packages each containing specific applications schemas. This is principally due to the observation that data providers and data users for each sub-theme are almost different.

It has also been decided to not apply a coverage / grid modelization at this stage of the development of the data specification, due to the fact that such coverage, if existing, are more resulting of spatial analysis outputs (e.g. access to telecommunication networks – GSM, 3G, etc.) than real spatial information (e.g. position of antennas).

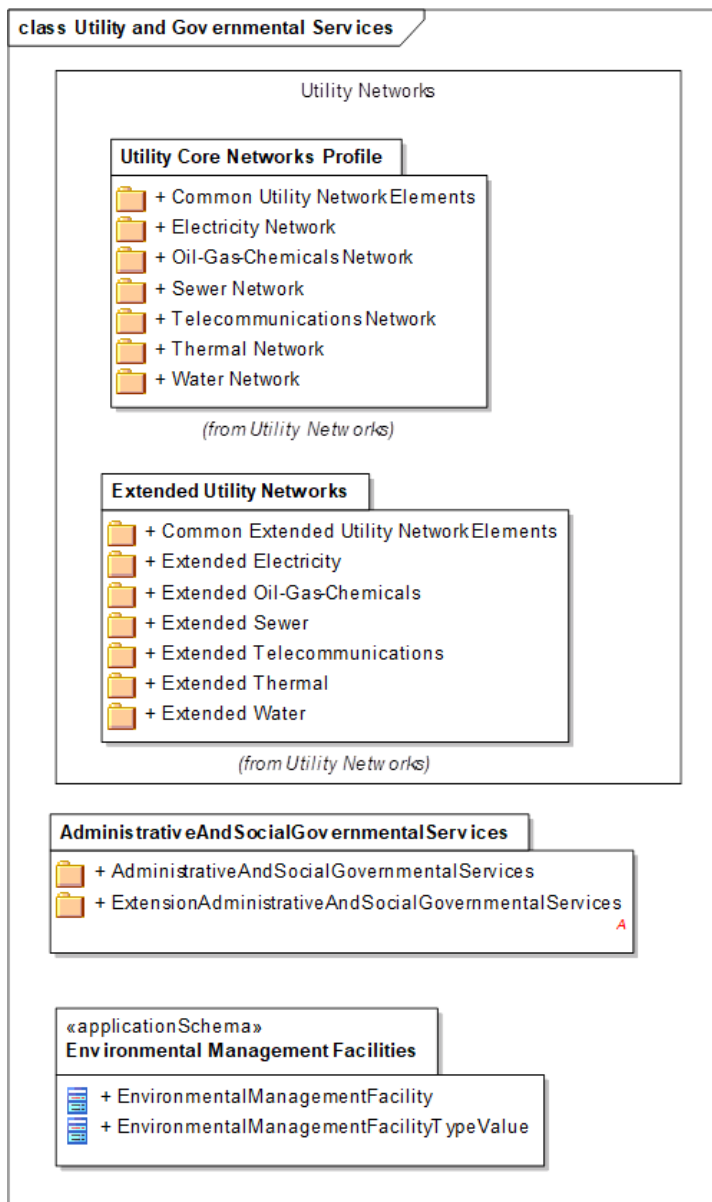


Figure 2 – UML class diagram: Overview of the "Utility and governmental services" theme.

This data specification defines the following application schemas:

For *Administrative and social governmental services*:

- The "**Administrative and Social Governmental Services**" *application schema* that provides information concerning the location and the type of administrative and social governmental services;
- The "**Extended Administrative and Social Governmental Services**" *application schema* that provides more detailed information concerning administrative and social governmental services such as occupancy, resources and other specific descriptions;

For *Environmental Management Facilities*:

- The "**Environmental Management Facilities**" *application schema* that supports information about waste treatment and storage practices, plus other environmental activities.

For *Utility networks*:

The "*Utility Networks Profile*" *application schemas* are based on a node-arc-node structure and network concept (derived from the Generic Network model). Especially designed to describe data into a structured model with only the most basic characteristics, but adhering to the node-arc-node concept (taken from the "Network" concept in the GCM), respectively for the six types of utility networks (electricity, oil-gas-chemicals, water, sewer, thermal and telecommunications). Topology is not required being possible to represent networks as single features not topologically interconnected ("spaghetti" representation). ***Utility Networks Profile contains the following application schemas:***

- The "**Common Utility Network Elements**" **Application Schema** that contains the common elements to all thematic networks.
- The "**Electricity Network**" **Application Schema** that extends the common elements for the electricity domain.
- The "**Oil-Gas-Chemical Network**" **Application Schema** that extends the common elements for the Oil, Gas and Chemical domain.
- The *"Telecommunications Network" Application Schema** that extends the common elements for the Telecommunications domain.
- The *"Thermal Network" Application Schema** that extends the common elements for the Thermal domain.
- The *"Water network" Application Schema** that extends the common elements for the Water domain.

The "*Extended Utility Networks*" *application schemas* cannot be considered as real application schemas, since their development is at its first step and they are proposed in the present document in Annex G only as leads for defining more-detailed standards later;

- The "**Common Extended Utility Network Elements**" **Application Schema** that contains the common elements to all thematic networks.
- The "**Extended Electricity**" **Application Schema** that extends the common elements for the

electricity domain.

- The "**Extended Oil-Gas-Chemical**" **Application Schema** that extends the common elements for the Oil, Gas and Chemical domain.
- The *"Extended Telecommunications" Application Schema** that extends the common elements for the Telecommunications domain.
- The *"Extended Thermal" Application Schema** that extends the common elements for the Thermal domain.
- The *"Extended Water" Application Schema** that extends the common elements for the Water domain.

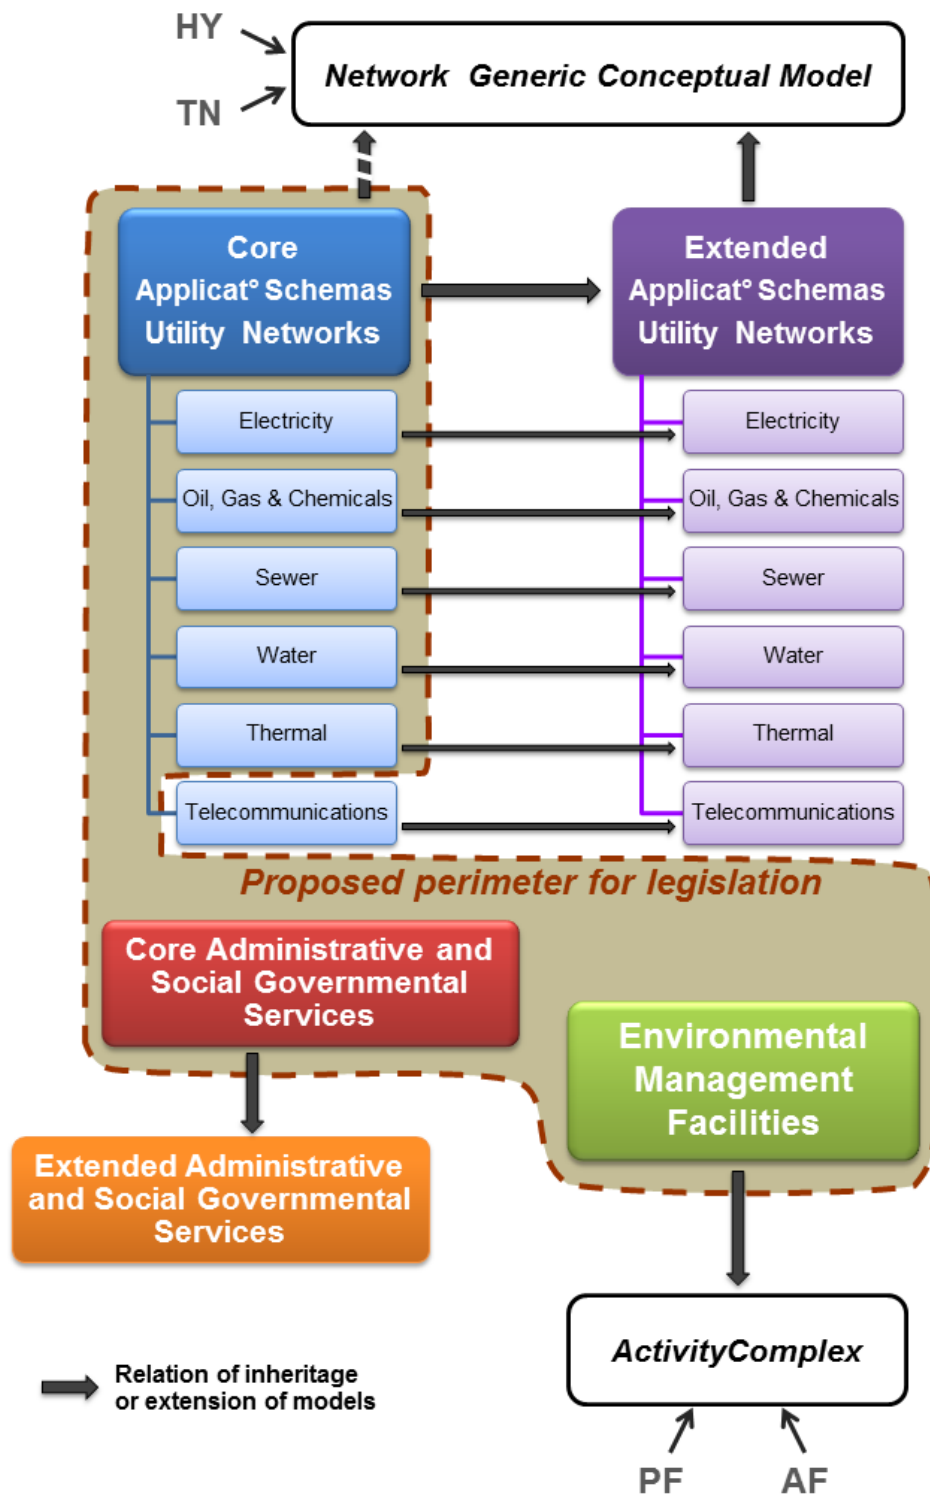


Figure 3 – Overview of the "Utility and governmental services" criteria for Application Schemas.

5.1. Application schemas – Overview

5.1.1. Application schemas included in the IRs

Articles 3, 4 and 5 of the Implementing Rules lay down the requirements for the content and structure of the data sets related to the INSPIRE Annex themes.

IR Requirement

Article 4

Types for the Exchange and Classification of Spatial Objects



1. For the exchange and classification of spatial objects from data sets meeting the conditions laid down in Article 4 of Directive 2007/2/EC, Member States shall use the spatial object types and associated data types and code lists that are defined in Annexes II, III and IV for the themes the data sets relate to.
2. When exchanging spatial objects, Member States shall comply with the definitions and constraints set out in the Annexes and provide values for all attributes and association roles set out for the relevant spatial object types and data types in the Annexes. For voidable attributes and association roles for which no value exists, Member States may omit the value.

The types to be used for the exchange and classification of spatial objects from data sets related to the spatial data theme *Utility and Government Services* are defined in the following application schemas (see sections 5.3 – 5.5 – 5.6.2 – 5.6.3 – 5.6.4 – 5.6.5 – 5.6.6 – 5.6.7):

- Common Utility Network Elements
- Electricity Network
- Oil-Gas-Chemical Network
- Sewer Network
- Thermal Network
- Water Network
- Administrative and Social Governmental Services
- Environmental Management Facilities

The application schemas specify requirements on the properties of each spatial object including its multiplicity, domain of valid values, constraints, etc.

NOTE The application schemas presented in this section contain some additional information that is not included in the Implementing Rules, in particular multiplicities of attributes and association roles.



TG Requirement 1

Spatial object types and data types shall comply with the multiplicities defined for the attributes and association roles in this section.

An application schema may include references (e.g. in attributes or inheritance relationships) to common types or types defined in other spatial data themes. These types can be found in a subsection called "Imported Types" at the end of each application schema section. The common types referred to from application schemas included in the IRs are addressed in Article 3.



IR Requirement

Article 3

Common Types

Types that are common to several of the themes listed in Annexes I, II and III to Directive 2007/2/EC shall conform to the definitions and constraints and include the attributes and association roles set out in Annex I.

NOTE Since the IRs contain the types for all INSPIRE spatial data themes in one document, Article 3 does not explicitly refer to types defined in other spatial data themes, but only to types defined in external data models.

Common types are described in detail in the Generic Conceptual Model [DS-D2.7], in the relevant international standards (e.g. of the ISO 19100 series) or in the documents on the common INSPIRE models [DS-D2.10.x]. For detailed descriptions of types defined in other spatial data themes, see the corresponding Data Specification TG document [DS-D2.8.x].

5.1.2. Additional recommended application schemas

In addition to the application schemas listed above, the following additional application schemas have been defined for the theme *Utility and Government Services* (see sections Annex.G):

- Common Extended Utility Network Elements
- Extended Electricity
- Extended Oil-Gas-Chemical
- Extended Sewer
- Extended Thermal
- Extended Water
- Extended Administrative and Social Governmental Services

These additional application schemas are not included in the IRs. They typically address requirements from specific (groups of) use cases and/or may be used to provide additional information. They are included in this specification in order to improve interoperability also for these additional aspects and to illustrate the extensibility of the application schemas included in the IRs.

Recommendation 1



Additional and/or use case-specific information related to the theme *Utility and Government Services* should be made available using the spatial object types and data types specified in the following application schemas: Common Extended Utility Network Elements; Extended Electricity; Extended Oil-Gas-Chemical; Extended Sewer; Extended Thermal; Extended Water; Extended Administrative and Social Governmental Services.

These spatial object types and data types should comply with the definitions and constraints and include the attributes and association roles defined in this section.

The code lists used in attributes or association roles of spatial object types or data types should comply with the definitions and include the values defined in this section.

5.2. Basic notions

This section explains some of the basic notions used in the INSPIRE application schemas. These explanations are based on the GCM [DS-D2.5].

5.2.1. Notation

5.2.1.1. Unified Modeling Language (UML)

The application schemas included in this section are specified in UML, version 2.1. The spatial object types, their properties and associated types are shown in UML class diagrams.

NOTE For an overview of the UML notation, see Annex D in [ISO 19103].

The use of a common conceptual schema language (i.e. UML) allows for an automated processing of application schemas and the encoding, querying and updating of data based on the application schema – across different themes and different levels of detail.

The following important rules related to class inheritance and abstract classes are included in the IRs.

IR Requirement

Article 5

Types



(...)

2. Types that are a sub-type of another type shall also include all this type's attributes and association roles.
3. Abstract types shall not be instantiated.

The use of UML conforms to ISO 19109 8.3 and ISO/TS 19103 with the exception that UML 2.1 instead of ISO/IEC 19501 is being used. The use of UML also conforms to ISO 19136 E.2.1.1.1-E.2.1.1.4.

NOTE ISO/TS 19103 and ISO 19109 specify a profile of UML to be used in conjunction with the ISO 19100 series. This includes in particular a list of stereotypes and basic types to be used in application schemas. ISO 19136 specifies a more restricted UML profile that allows for a direct encoding in XML Schema for data transfer purposes.

To model constraints on the spatial object types and their properties, in particular to express data/data set consistency rules, OCL (Object Constraint Language) is used as described in ISO/TS 19103, whenever possible. In addition, all constraints are described in the feature catalogue in English, too.

NOTE Since "void" is not a concept supported by OCL, OCL constraints cannot include expressions to test whether a value is a *void* value. Such constraints may only be expressed in natural language.

5.2.1.2. Stereotypes

In the application schemas in this section several stereotypes are used that have been defined as part of a UML profile for use in INSPIRE [DS-D2.5]. These are explained in Table 1 below.

Table 1 – Stereotypes (adapted from [DS-D2.5])

Stereotype	Model element	Description
applicationSchema	Package	An INSPIRE application schema according to ISO 19109 and the Generic Conceptual Model.
leaf	Package	A package that is not an application schema and contains no packages.
featureType	Class	A spatial object type.
type	Class	A type that is not directly instantiable, but is used as an abstract collection of operation, attribute and relation signatures. This stereotype should usually not be used in INSPIRE application schemas as these are on a different conceptual level than classifiers with this stereotype.
dataType	Class	A structured data type without identity.
union	Class	A structured data type without identity where exactly one of the properties of the type is present in any instance.
codeList	Class	A code list.
import	Dependency	The model elements of the supplier package are imported.
voidable	Attribute, association role	A voidable attribute or association role (see section 5.2.2).

lifeCycleInfo	Attribute, association role	If in an application schema a property is considered to be part of the life-cycle information of a spatial object type, the property shall receive this stereotype.
version	Association role	If in an application schema an association role ends at a spatial object type, this stereotype denotes that the value of the property is meant to be a specific version of the spatial object, not the spatial object in general.

5.2.2. Voidable characteristics

The «voidable» stereotype is used to characterise those properties of a spatial object that may not be present in some spatial data sets, even though they may be present or applicable in the real world. This does *not* mean that it is optional to provide a value for those properties.

For all properties defined for a spatial object, a value has to be provided – either the corresponding value (if available in the data set maintained by the data provider) or the value of *void*. A *void* value shall imply that no corresponding value is contained in the source spatial data set maintained by the data provider or no corresponding value can be derived from existing values at reasonable costs.



Recommendation 2

The reason for a *void* value should be provided where possible using a listed value from the VoidReasonValue code list to indicate the reason for the missing value.

The VoidReasonValue type is a code list, which includes the following pre-defined values:

- **Unpopulated:** The property is not part of the dataset maintained by the data provider. However, the characteristic may exist in the real world. For example when the "elevation of the water body above the sea level" has not been included in a dataset containing lake spatial objects, then the reason for a void value of this property would be 'Unpopulated'. The property receives this value for all spatial objects in the spatial data set.
- **Unknown:** The correct value for the specific spatial object is not known to, and not computable by the data provider. However, a correct value may exist. For example when the "elevation of the water body above the sea level" *of a certain lake* has not been measured, then the reason for a void value of this property would be 'Unknown'. This value is applied only to those spatial objects where the property in question is not known.
- **Withheld:** The characteristic may exist, but is confidential and not divulged by the data provider.

NOTE It is possible that additional reasons will be identified in the future, in particular to support reasons / special values in coverage ranges.

The «voidable» stereotype does not give any information on whether or not a characteristic exists in the real world. This is expressed using the multiplicity:

- If a characteristic may or may not exist in the real world, its minimum cardinality shall be defined as 0. For example, if an Address may or may not have a house number, the multiplicity of the corresponding property shall be 0..1.
- If at least one value for a certain characteristic exists in the real world, the minimum cardinality shall be defined as 1. For example, if an Administrative Unit always has at least one name, the multiplicity of the corresponding property shall be 1..*.

In both cases, the «voidable» stereotype can be applied. In cases where the minimum multiplicity is 0, the absence of a value indicates that it is known that no value exists, whereas a value of void indicates that it is not known whether a value exists or not.

EXAMPLE If an address does not have a house number, the corresponding Address object should not have any value for the «voidable» attribute house number. If the house number is simply not known or not populated in the data set, the Address object should receive a value of *void* (with the corresponding void reason) for the house number attribute.

5.2.3. Code lists

Code lists are modelled as classes in the application schemas. Their values, however, are managed outside of the application schema.

5.2.3.1. Code list types

The IRs distinguish the following types of code lists.

IR Requirement

Article 6

Code Lists for Spatial Data Sets

1. The code lists included in this Regulation set out the multilingual thesauri to be used for the key attributes, in accordance with Article 8(2), point (c), of Directive 2007/2/EC.
2. The Commission shall establish and operate an INSPIRE code list register at Union level for managing and making publicly available the values that are included in the code lists referred to in paragraph 1.
3. The Commission shall be assisted by the INSPIRE Commission expert group in the maintenance and update of the code list values.
4. Code lists shall be one of the following types:
 - a. code lists whose values comprise only the values specified in the INSPIRE code list register;
 - b. code lists whose values comprise the values specified in the INSPIRE code



- list register and narrower values defined by data providers;
 - c. code lists whose values comprise the values specified in the INSPIRE code list register and additional values at any level defined by data providers;
 - d. code lists, whose values comprise any values defined by data providers.
5. Code lists may be hierarchical. Values of hierarchical code lists may have a more general parent value.
 6. Where, for an attribute whose type is a code list as referred to in paragraph 4, points (b), (c) or (d), a data provider provides a value that is not specified in the INSPIRE code list register, that value and its definition and label shall be made available in another register.

The type of code list is represented in the UML model through the tagged value *extensibility*, which can take the following values:

- *none*, representing code lists whose allowed values comprise only the values specified in the IRs (type a);
- *narrower*, representing code lists whose allowed values comprise the values specified in the IRs and narrower values defined by data providers (type b);
- *open*, representing code lists whose allowed values comprise the values specified in the IRs and additional values at any level defined by data providers (type c); and
- *any*, representing code lists, for which the IRs do not specify any allowed values, i.e. whose allowed values comprise any values defined by data providers (type d).



Recommendation 3

Additional values defined by data providers should not replace or redefine any value already specified in the IRs.

NOTE This data specification may specify recommended values for some of the code lists of type (b), (c) and (d) (see section 5.2.4.3). These recommended values are specified in a dedicated Annex.

In addition, code lists can be hierarchical, as explained in Article 6(2) of the IRs.

IR Requirement

Article 6

Code Lists for Spatial Data Sets



(...)

5. Code lists may be hierarchical. Values of hierarchical code lists may have a more general parent value.

The type of code list and whether it is hierarchical or not is also indicated in the feature catalogues.

5.2.3.2. Obligations on data providers



IR Requirement

Article 6 Code Lists for Spatial Data Sets

(...)

6. Where, for an attribute whose type is a code list as referred to in paragraph 4, points (b), (c) or (d), a data provider provides a value that is not specified in the INSPIRE code list register, that value and its definition and label shall be made available in another register.

Article 6(6) obliges data providers to use only values that are allowed according to the specification of the code list. The "allowed values according to the specification of the code list" are the values explicitly defined in the IRs plus (in the case of code lists of type (b), (c) and (d)) additional values defined by data providers.

For attributes whose type is a code list of type (b), (c) or (d) data providers may use additional values that are not defined in the IRs. Article 6(6) requires that such additional values and their definition be made available in a register. This enables users of the data to look up the meaning of the additional values used in a data set, and also facilitates the re-use of additional values by other data providers (potentially across Member States).

NOTE Guidelines for setting up registers for additional values and how to register additional values in these registers is still an open discussion point between Member States and the Commission.

5.2.3.3. Recommended code list values

For code lists of type (b), (c) and (d), this data specification may propose additional values as a recommendation (in a dedicated Annex). These values will be included in the INSPIRE code list register. This will facilitate and encourage the usage of the recommended values by data providers since the obligation to make additional values defined by data providers available in a register (see section 5.2.4.2) is already met.



Recommendation 4

Where these Technical Guidelines recommend values for a code list in addition to those specified in the IRs, these values should be used.

NOTE For some code lists of type (d), no values may be specified in these Technical Guidelines. In these cases, any additional value defined by data providers may be used.

5.2.3.4. Governance

The following two types of code lists are distinguished in INSPIRE:

- *Code lists that are governed by INSPIRE (INSPIRE-governed code lists)*. These code lists will be managed centrally in the INSPIRE code list register. Change requests to these code lists (e.g. to add, deprecate or supersede values) are processed and decided upon using the INSPIRE code list register's maintenance workflows.

INSPIRE-governed code lists will be made available in the INSPIRE code list register at

<http://inspire.ec.europa.eu/codelist/<CodeListName>>. They will be available in SKOS/RDF, XML and HTML. The maintenance will follow the procedures defined in ISO 19135. This means that the only allowed changes to a code list are the addition, deprecation or supersession of values, i.e. no value will ever be deleted, but only receive different statuses (valid, deprecated, superseded). Identifiers for values of INSPIRE-governed code lists are constructed using the pattern <http://inspire.ec.europa.eu/codelist/<CodeListName>/<value>>.

- *Code lists that are governed by an organisation outside of INSPIRE (externally governed code lists)*. These code lists are managed by an organisation outside of INSPIRE, e.g. the World Meteorological Organization (WMO) or the World Health Organization (WHO). Change requests to these code lists follow the maintenance workflows defined by the maintaining organisations. Note that in some cases, no such workflows may be formally defined.

Since the updates of externally governed code lists is outside the control of INSPIRE, the IRs and these Technical Guidelines reference a specific version for such code lists.

The tables describing externally governed code lists in this section contain the following columns:

- The *Governance* column describes the external organisation that is responsible for maintaining the code list.
- The *Source* column specifies a citation for the authoritative source for the values of the code list. For code lists, whose values are mandated in the IRs, this citation should include the version of the code list used in INSPIRE. The version can be specified using a version number or the publication date. For code list values recommended in these Technical Guidelines, the citation may refer to the "latest available version".
- In some cases, for INSPIRE only a subset of an externally governed code list is relevant. The subset is specified using the *Subset* column.
- The *Availability* column specifies from where (e.g. URL) the values of the externally governed code list are available, and in which formats. Formats can include machine-readable (e.g. SKOS/RDF, XML) or human-readable (e.g. HTML, PDF) ones.

Code list values are encoded using http URIs and labels. Rules for generating these URIs and labels are specified in a separate table.

Recommendation 5



The http URIs and labels used for encoding code list values should be taken from the INSPIRE code list registry for INSPIRE-governed code lists and generated according to the relevant rules specified for externally governed code lists.

NOTE Where practicable, the INSPIRE code list register could also provide http URIs and labels for externally governed code lists.

5.2.3.5. Vocabulary

For each code list, a tagged value called "vocabulary" is specified to define a URI identifying the values of the code list. For INSPIRE-governed code lists and externally governed code lists that do not have a persistent identifier, the URI is constructed following the pattern `<a`

href="http://inspire.ec.europa.eu/codelist/<UpperCamelCaseName>"
class="bare">http://inspire.ec.europa.eu/codelist/<UpperCamelCaseName>;.

If the value is missing or empty, this indicates an empty code list. If no sub-classes are defined for this empty code list, this means that any code list may be used that meets the given definition.

An empty code list may also be used as a super-class for a number of specific code lists whose values may be used to specify the attribute value. If the sub-classes specified in the model represent all valid extensions to the empty code list, the subtyping relationship is qualified with the standard UML constraint "{complete,disjoint}".

5.2.4. Identifier management

IR Requirement

Article 9

Identifier Management



1. The data type Identifier defined in Section 2.1 of Annex I shall be used as a type for the external object identifier of a spatial object.
2. The external object identifier for the unique identification of spatial objects shall not be changed during the life-cycle of a spatial object.

NOTE 1 An external object identifier is a unique object identifier which is published by the responsible body, which may be used by external applications to reference the spatial object. [DSD2.5]

NOTE 2 Article 9(1) is implemented in each application schema by including the attribute *inspireId* of type Identifier.

NOTE 3 Article 9(2) is ensured if the *namespace* and *localId* attributes of the Identifier remains the same for different versions of a spatial object; the *version* attribute can of course change.

5.2.5. Geometry representation

IR Requirement

Article 12

Other Requirements & Rules



1. The value domain of spatial properties defined in this Regulation shall be restricted to the Simple Feature spatial schema as defined in Herring, John R. (ed.), OpenGIS® Implementation Standard for Geographic information – Simple feature access – Part 1: Common architecture, version 1.2.1, Open Geospatial Consortium, 2011, unless specified otherwise for a specific spatial data theme or type.

NOTE 1 The specification restricts the spatial schema to 0-, 1-, 2-, and 2.5-dimensional geometries where all curve interpolations are linear and surface interpolations are performed by triangles.

NOTE 2 The topological relations of two spatial objects based on their specific geometry and

topology properties can in principle be investigated by invoking the operations of the types defined in ISO 19107 (or the methods specified in EN ISO 19125-1).

The location of some *Utility and governmental services* features may be originally defined in the real world relative to administrative, cadastral or natural boundaries (roads, rivers, walls, etc.). These locations are initially similar to the position of a facility or a service (exact location of the networks elements, or of a zone where some public service is provided), which may be known to exist up to a natural or administrative feature. However, the INSPIRE *Utility and governmental services* data specification represents such facilities or services as absolute, not relative geometries. That is, they have their own, absolute geometries (as INSPIRE defined GM_Object or GM_MultiSurface) and their geographical location is not dependent on other features (other than during their original delineation). This is because many Member States do not update *Utility and governmental services* geometries if there are changes to administrative or natural boundaries, and in any case, the official definition of a *Utility and governmental services* remains fixed even if there are underlying changes to the administrative boundary or the location of natural features.

For example, one can see that some underground networks can remain at the same position, even after some road works.

On another hand, some other *Utility and governmental services* features do really share their existence with other datasets (buildings, facilities described in other themes, like *Production and industrial facilities*). For those elements, the location refers directly to the objects of those related themes, so that if an instantiation of these supportive objects are deleted from a database, the service object has to be deleted in cascade. That reflects the dependence in real world: if a governmental service is provided in a building that is destroyed, then no more service is provided, or if a service is provided for a certain aggregation of administrative units (such as intercommunality, or region), the perimeter of responsibility will evolve with the new geometry of such administrative area, if modified.

In such case, the model refers directly to the objects (among the proposed location or area in the union type, for example).

Since the data concerned by the INSPIRE theme *Utility and governmental services* can be also produced and used at a local level (according to many decentralization processes), the level of detail should be important. In fact, description of a utility network or of services provided by or for a specific Public Administrative Body will be rich in their geometries and attributes (large scale data, accurate distinction between several services provided at local level).

This seems opposite to one goal of the INSPIRE directive, which is to gather similar data from different producers and users, at a greater level (regional, national or European). Then, the level of details described in the former paragraph is less important than collecting exhaustively the same type of data for the whole territory analysed.

This *data collection* work is somehow developed by aggregating agencies (regional, national or pan-European) and therefore may include some generalization processes, whether geometric or semantic. Thus data can be simplified, as soon as they're used at a greater level, and the use of large scale data at such greater levels can prove to be counterproductive. Then, if certain datasets are inappropriate to be used at certain scales, it should be specified within its restrictions metadata.

On another hand, the different use cases (localization, management of services, spatial and semantic analysis or reporting) imply different approaches and treatments of the data related to *Utility and governmental services*.

Thus, the models proposed for the theme *Utility and governmental services* tend to be as simple as possible and should fit to the use of such data at any scale (whether local or global). Nevertheless, the level of detail (according to the scale and accuracy of the dataset) should be provided within the metadata and data quality information.

5.2.6. Temporality representation

The application schema(s) use(s) the derived attributes "beginLifespanVersion" and "endLifespanVersion" to record the lifespan of a spatial object.

The attributes "beginLifespanVersion" specifies the date and time at which this version of the spatial object was inserted or changed in the spatial data set. The attribute "endLifespanVersion" specifies the date and time at which this version of the spatial object was superseded or retired in the spatial data set.

NOTE 1 The attributes specify the beginning of the lifespan of the version in the spatial data set itself, which is different from the temporal characteristics of the real-world phenomenon described by the spatial object. This lifespan information, if available, supports mainly two requirements: First, knowledge about the spatial data set content at a specific time; second, knowledge about changes to a data set in a specific time frame. The lifespan information should be as detailed as in the data set (i.e., if the lifespan information in the data set includes seconds, the seconds should be represented in data published in INSPIRE) and include time zone information.

NOTE 2 Changes to the attribute "endLifespanVersion" does not trigger a change in the attribute "beginLifespanVersion".

IR Requirement

Article 10

Life-cycle of Spatial Objects



(...)

3. Where the attributes beginLifespanVersion and endLifespanVersion are used, the value of endLifespanVersion shall not be before the value of beginLifespanVersion.

NOTE The requirement expressed in the IR Requirement above will be included as constraints in the UML data models of all themes.

Recommendation 6



If life-cycle information is not maintained as part of the spatial data set, all spatial objects belonging to this data set should provide a void value with a reason of "unpopulated".

5.2.6.1. Validity of the real-world phenomena

The application schema(s) use(s) the attributes "validFrom" and "validTo" to record the validity of the real-world phenomenon represented by a spatial object.

The attributes "validFrom" specifies the date and time at which the real-world phenomenon became valid in the real world. The attribute "validTo" specifies the date and time at which the real-world phenomenon is no longer valid in the real world.

Specific application schemas may give examples what "being valid" means for a specific real-world phenomenon represented by a spatial object.



(...)

IR Requirement

Article 12

Other Requirements & Rules

3. Where the attributes validFrom and validTo are used, the value of validTo shall not be before the value of validFrom.

NOTE The requirement expressed in the IR Requirement above will be included as constraints in the UML data models of all themes.

The beginLifespanVersion stores the date on which the data instance representing the features of the *Utility and Governmental Services* theme was first created, and the endLifespanVersion is populated when some attribute or geometry of that instance changes. At this point, an entirely new instance is created repeating all of the attributes of the instance that have not changed, and providing new values for the attributes or geometries that have changed. The new instance uses the same value for objectIdentifier.localId and objectIdentifier.nameSpace, but has a new value for objectIdentifier.version. Using this method for representing temporality, all of the versions of features of the *Utility and Governmental Services* theme can be established by looking for all the *Utility and Governmental Services* instances with the same value for objectIdentifier.localID and objectIdentifier.namespace.

The system dates can also be used for incremental updates. Instances that have been added since the last update can be determined by finding instances whose beginLifespanVersion is after the date of the last update. Instances that have been changed since the last update can be determined by finding instances whose endLifespanVersion is after the date of the last update.

5.3. Application schema Administrative and Social Governmental Services

5.3.1. Description

5.3.1.1. Narrative description

The *Administrative and social governmental services* application schema consists of the class *GovernmentalService*, the related data types, union classes plus a code list.

Non-voidable attributes of the class *GovernmentalService* are *InspireID*, the location where the service is provided (*serviceLocation*) and the type of the service (*serviceType*).

The location of the service (attribute *serviceLocation*) can be modelled variously, so data providers can choose the most appropriate alternative. Since the data type of these alternatives can vary, a union-class^[15] is used for that attribute^[16].

If services are located inside buildings or activity complexes, the service geometry should be provided as a reference to these features. Some service sites are located outside buildings or activity complexes, but they have an address (e.g. rescue helicopter landing site). Then the spatial reference should be allocated by the address.

In single cases the service location coincides with a network element which can also be used as spatial reference. The approach to use existing geometries avoids redundancy between the application schemas of different INSPIRE themes. Beyond that the service location can be provided by a geometry.

The type of the service is specified by a code list (*ServiceTypeValue*). Foundation is the COFOG classification by EUROSTAT [COFOG 1999]^[17]. The acronym COFOG means "Classification of the Functions of Government". This classification covers a broad range of administrative and social governmental services but provides primarily a template for statistics regarding government expenditures. Therefore COFOG can't be used unmodified.

The list has been tailored and refined by types, which are based on requirements derived from legislation, use cases and interviews. The code list is organized hierarchically^[18]. In order to map the hierarchy inside the code list, parent value is mentioned in the codelist table (cf. § 5.4.3.1).

To be complete, the sub-part of the code list regarding the education domain, it has involved the recent evolution of the ISCED (International Standard Classification of Education) that occurred in 2011^[19].

In this context, it's important to note that the meaning of any item has to be taken not only from its name, definition or description, but also from its position within the hierarchy. The type "GovernmentalService" is the (fictive – because not part of the list) root element of the tree. Both nodes (e.g. fire-protection service) and leaves (e.g. fire station) are useable as service types. The tree is intentionally unbalanced.

The further attributes of *GovernmentalService* are of stereotype [\[voidable\]](#). Beside *begin/endLifespanVersion*, which refer to the lifecycle of a version of the (digital) spatial object, the feature type in its core version contains the attribute *pointOfContact* and *areaOfResponsibility*.

PointOfContact (data type *Contact* from GCM) provides contact information in order to get access to a service and/or initial information regarding a service.

The attribute *areaOfResponsibility* contains the spatial responsibility of a service instance, e.g. of an administration or a police station.

This information simplifies the identification of the appropriate service location for users. The spatial reference can be provided either by an *AdministrativeUnit*, a *NamedPlace*, an *ActivityComplex* or geometry (union-class).

In its extended version *GovernmentalService* includes a number of voidable attributes (see the feature catalog for further information):

- *additionalLocationDescription* can be used to give an additional textual description of the service location. This is useful to find the service (e.g. an office) inside a large building complex.
- *hoursOfService* refers to the time, when the service itself is available. The temporal availability of a service itself will often coincide with the availability of the dedicated point of contact, which is specified inside the *pointOfContact* attribute (e.g. in case of a medical practice). In other cases, there is a clear distinction. For example a rescue station is engaged only a limited time (shall be expressed by *hoursOfService*) but there is a central hotline which is available twenty-four-seven (shall be expressed by *hoursOfService* inside the contact data type of the core attribute *pointOfContact*).
- *name* can be used to provide a common denotation for the service (e.g. "hôtel de ville")
- *note* can be used to provide further information regarding the service. The inclusion of *note* considers the fact, that the scope of feature type inside the application schema is very broad and therefore not all information data providers want to publish can be covered by the given attributes.
- *occupancy* states the type (as *PTFreeText*) and number of persons a service can handle in terms of a capacity (e.g. the capacity of a school).
- *relatedParty* (see GCM for definition) contains the owner(s), the operator(s) or the authority(ies) of the service inclusive their contact information. The point of contact of a service (which is provided as *pointOfContact* inside the core) will coincide often with the contact information of one of the three mentioned party types, but not in always
- *resources* is comparable to *occupancy* but describes the type and amount of technical resources a service provides (e.g. type and capacity of a hydrant).
- *serviceLevel* allows data providers to classify services regarding the administrative level where the service is provided from (based on NUTS classification).
- *validFrom* and *validTo* refer to the lifecycle of the real world object.

5.3.1.2. UML Overview

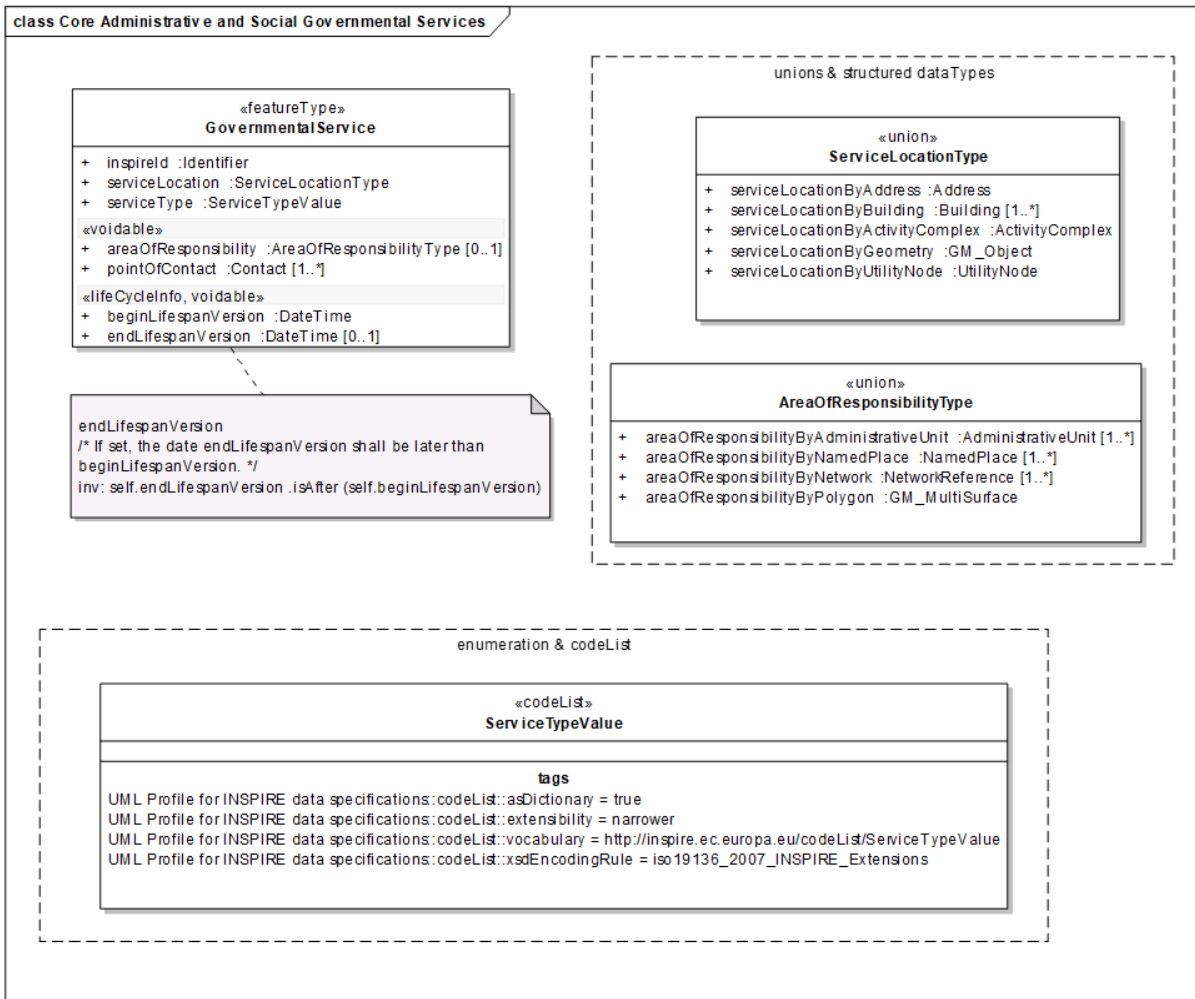


Figure 4 – Class diagram: Overview of the "Administrative and Social Governmental Services" application schema

5.3.1.3. Consistency between spatial data sets

Nothing more than what's previously referred

5.3.1.4. Identifier management

Nothing more than what's previously referred

5.3.1.5. Modelling of object references

Internal references:

The application schema describes single services. Several services can be offered at the same location or by the same authority. Such internal references aren't explicitly modelled but can be analysed by spatial or logical intersections.

External references:

This application schema provides a special view at real world objects. Very often the same real world object, which is modelled as a service in the application schema, can be seen as a building, an Activity Complex or a vulnerable element as well. Such external references are partly explicitly modelled in the application schema by using references to buildings or to activity complexes as

data types for the spatial attribute serviceLocation. Beyond that external references can be analysed by spatial intersections.

5.3.1.6. Geometry representation

As depicted and explained in the UML model above, instances of feature type *GovernmentalService*, may be modelled by using several types of spatial references or any kind of geometry (geometry type: *GM_Geometry*) in order not to force any MS or data producer to introduce changes in the way how they model and store their original data sets.

Since this application schema is focussed on services (and not on the spatial objects where services are located), it is strongly recommended to provide no other geometries as points. The intention to use the data type *GM_Object* in the application schema is to ease the effort for data provides if the geometry is originally stored with other data types. Anyway, the usage of other geometry types than point should be an exception.



Recommendation 7

When the spatial reference of an administrative and social governmental service is provided by an autonomous geometry, then the data should be modelled as point objects (geometry type: *GM_Point*).

5.3.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema AdministrativeAndSocialGovernmentalServices
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>AreaOfResponsibilityType</i>	AdministrativeAndSocialGovernmentalServices	«union»
<i>GovernmentalService</i>	AdministrativeAndSocialGovernmentalServices	«featureType»
<i>ServiceLocationType</i>	AdministrativeAndSocialGovernmentalServices	«union»
<i>ServiceTypeValue</i>	AdministrativeAndSocialGovernmentalServices	«codeList»

5.3.2.1. Spatial object types

5.3.2.1.1. *GovernmentalService*

GovernmentalService

Name:	governmental service
Definition:	Administrative and social governmental services such as public administrations, civil protection sites, schools and hospitals provided by Public Administrative Bodies or by private institutions as far as they are covered by the scope of the INSPIRE directive. This scope is mapped to the values of the corresponding code list serviceType Value.
Description:	The accordant sites are commonly presented in governmental and municipal portals and map systems as "point of interest"-data, and may be point-based locations of a variety of categories of municipal and governmental services and social infrastructure. The spatial object type itself is generic in terms of the modelling approach, that the concrete type of a GovernmentalService is determined by the value of the attribute serviceType.
Stereotypes:	«featureType»

Attribute: areaOfResponsibility

Name:	area of responsibility
Value type:	AreaOfResponsibilityType
Definition:	The spatial responsibility of a service instance.
Description:	EXAMPLE 1: An administration is responsible for a municipality; EXEMPLE 2: A specialized hospital is responsible for a region.
Multiplicity:	0..1
Stereotypes:	«voidable»

GovernmentalService**Attribute: beginLifespanVersion**

Name:	begin lifespan version
Value type:	DateTime
Definition:	Date and time at which this version of the spatial object was inserted or changed in the spatial data set.
Description:	Related to the life-cycle of the spatial object in the data set.
Multiplicity:	1
Stereotypes:	«lifeCycleInfo,voidable»

Attribute: endLifespanVersion

Name:	end lifespan version
Value type:	DateTime
Definition:	Date and time at which this version of the spatial object was superseded or retired in the spatial data set.
Description:	Related to the life-cycle of the spatial object in the data set.
Multiplicity:	0..1
Stereotypes:	«lifeCycleInfo,voidable»

Attribute: inspireId

Name:	INSPIRE identifier
Value type:	Identifier
Definition:	External object identifier of the governmental service.
Description:	NOTE An external object identifier is a unique object identifier published by the responsible body, which may be used by external applications to reference the spatial object. The identifier is an identifier of the spatial object, not an identifier of the real-world phenomenon.
Multiplicity:	1

GovernmentalService**Attribute: pointOfContact**

Name:	point of contact
Value type:	Contact
Definition:	Contains necessary information to get access to a service and/or initial information regarding a service.
Description:	In some cases this information will coincide with the contact information of the service authority, owner or operator (i.e. specific position or role of the responsible party, described in the relatedParty attribute of the GovernmentalServiceExtended in the extended profile).
Multiplicity:	1..*
Stereotypes:	«voidable»

Attribute: serviceLocation

Name:	service location
Value type:	ServiceLocationType
Definition:	Location where the service is offered.
Multiplicity:	1

Attribute: serviceType

Name:	service type value
Value type:	ServiceTypeValue
Definition:	Type of an administrative and governmental service.
Multiplicity:	1

Constraint: endLifespanVersion

Natural language:	If set, the date endLifespanVersion shall be later than beginLifespanVersion.
OCL:	inv: self.endLifespanVersion.isAfter(self.beginLifespanVersion)

5.3.2.2. Data types

5.3.2.2.1. *AreaOfResponsibilityType*

AreaOfResponsibilityType	
Name:	area of responsibility type
Definition:	Set of types for the description of spatial responsibility.
Stereotypes:	«union»
Attribute: areaOfResponsibilityByAdministrativeUnit	
Name:	area of responsibility by administrative unit
Value type:	AdministrativeUnit
Definition:	Administrative unit describing the geographic extent of the responsibility of a service.
Multiplicity:	1..*
Attribute: areaOfResponsibilityByNamedPlace	
Name:	area of responsibility by named place
Value type:	NamedPlace
Definition:	Geographical object describing the geographic extent of the responsibility of a service.
Multiplicity:	1..*
Attribute: areaOfResponsibilityByNetwork	
Name:	area of responsibility by network
Value type:	NetworkReference
Definition:	Part of a network describing the geographic extent of the competence of a service.
Multiplicity:	1..*
Attribute: areaOfResponsibilityByPolygon	
Name:	area of responsibility by polygon
Value type:	GM_MultiSurface
Definition:	Polygon describing the geographic extent of the responsibility of a service.
Multiplicity:	1

5.3.2.2.2. *ServiceLocationType*

ServiceLocationType

Name:	service location type
Definition:	Set of types of references to locate a service.
Stereotypes:	«union»

Attribute: serviceLocationByAddress

Name:	service location by address
Value type:	Address
Definition:	Location of the service by referring to an address.
Multiplicity:	1

Attribute: serviceLocationByBuilding

Name:	service location by building
Value type:	Building of the Buildings 2D package
Definition:	Location of the service by referring to a building.
Multiplicity:	1..*

Attribute: serviceLocationByActivityComplex

Name:	service location by activity complex
Value type:	ActivityComplex
Definition:	Location of the service by referring to an activity complex.
Multiplicity:	1

Attribute: serviceLocationByGeometry

Name:	service location by geometry
Value type:	GM_Object
Definition:	Location of the service by referring to a geometry.
Multiplicity:	1

ServiceLocationType

Attribute: serviceLocationByUtilityNode

Name:	location service by utility node
Value type:	UtilityNode
Definition:	Location of the service by referring to a node related to a utility network (water, telecommunication, etc.), e.g. hydrant or emergency call point.
Multiplicity:	1

5.3.2.3. Code lists

5.3.2.3.1. ServiceTypeValue

ServiceTypeValue

Name:	service type value
Definition:	Codelist containing a classification of governmental services.
Extensibility:	narrower
Identifier:	http://inspire.ec.europa.eu/codelist/ServiceTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and narrower values defined by data providers.

5.3.2.4. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

5.3.2.4.1. ActivityComplex

ActivityComplex

Package:	Activity Complex
Reference:	INSPIRE Data Specifications – Base Models – Activity Complex, version 1.0 [DS-D2.10.3]
Definition:	A "single unit", both technically and economically, under the management control of the same legal entity (operator), covering activities as those listed in the Eurostat NACE classification, products and services. Activity Complex includes all infrastructure, equipment and materials. It must represent the whole area, at the same or different geographical location, managed by a "single unit".
	Description:

5.3.2.4.2. Address

Address

Package:	Addresses
Reference:	INSPIRE Data specification on Addresses [DS-D2.8.I.5]
Definition:	An identification of the fixed location of property by means of a structured composition of geographic names and identifiers.

5.3.2.4.3. *AdministrativeUnit*

AdministrativeUnit	
Package:	AdministrativeUnits
Reference:	INSPIRE Data specification on Administrative Units [DS-D2.8.I.4]
Definition:	Unit of administration where a Member State has and/or exercises jurisdictional rights, for local, regional and national governance.

5.3.2.4.4. *Building*

Building	
Package:	BuildingsBase
Reference:	INSPIRE Data specification on Buildings [DS-D2.8.III.2]
Definition:	A Building is an enclosed construction above and/or underground, used or intended for the shelter of humans, animals or things or for the production of economic goods. A building refers to any structure permanently constructed or erected on its site.

5.3.2.4.5. *Contact*

Contact	
Package:	Base Types 2
Reference:	INSPIRE Generic Conceptual Model, version 3.4 [DS-D2.5]
Definition:	Communication channels by which it is possible to gain access to someone or something.

5.3.2.4.6. *DateTime*

DateTime	
Package:	Date and Time
Reference:	Geographic information — Conceptual schema language [ISO/TS 19103:2005]

5.3.2.4.7. *GM_MultiSurface*

GM_MultiSurface

Package:	Geometric aggregates
Reference:	Geographic information — Spatial schema [ISO 19107:2003]

5.3.2.4.8. GM_Object

GM_Object (abstract)

Package:	Geometry root
Reference:	Geographic information — Spatial schema [ISO 19107:2003]

5.3.2.4.9. Identifier

Identifier

Package:	Base Types
Reference:	INSPIRE Generic Conceptual Model, version 3.4 [DS-D2.5]
Definition:	External unique object identifier published by the responsible body, which may be used by external applications to reference the spatial object.
Description:	<p>NOTE1 External object identifiers are distinct from thematic object identifiers.</p> <p>NOTE 2 The voidable version identifier attribute is not part of the unique identifier of a spatial object and may be used to distinguish two versions of the same spatial object.</p> <p>NOTE 3 The unique identifier will not change during the life-time of a spatial object.</p>

5.3.2.4.10. NamedPlace

NamedPlace

Package:	Geographical Names
Reference:	INSPIRE Data specification on Geographical Names [DS-D2.8.I.3]
Definition:	Any real world entity referred to by one or several proper nouns.

5.3.2.4.11. *NetworkReference*

NetworkReference	
Package:	Network
Reference:	INSPIRE Data Specifications – Base Models – Generic Network Model, version 1.0 [DS-D2.10.1]
Definition:	A reference to a network element.

5.3.2.4.12. *UtilityNode*

UtilityNode (abstract)	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A point spatial object which is used for connectivity.
Description:	Nodes are found at both ends of the UtilityLink.

5.3.3. Externally governed code lists

There are not externally governed code list in this application schema.

5.4. Application schema **Extended Administrative and Social Governmental Services**

5.4.1. Narrative description

Extended definition of the Governmental Services feature type.

5.4.1.1. UML Overview

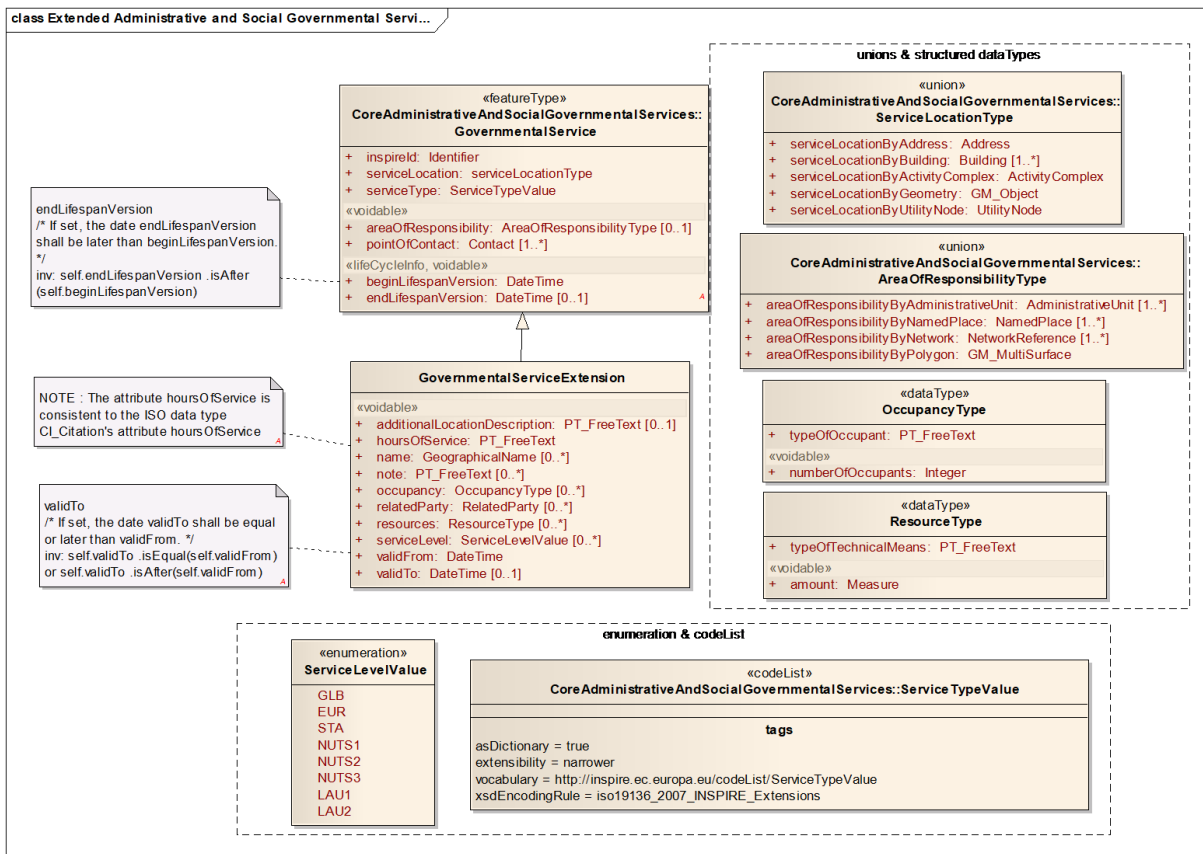


Figure 5 – UML class diagram: Overview of the Extended Administrative and Social Government Services application schema

5.4.1.2. Consistency between spatial data sets

Nothing more than what's previously defined for the *Administrative and Social Government Services* application schema.

5.4.1.3. Identifier management

Nothing more than what's previously defined for the *Administrative and Social Government Services* application schema.

5.4.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema ExtensionAdministrativeAndSocialGovernmentalServices
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>OccupancyType</i>	ExtensionAdministrativeAndSocialGovernmentalServices	«dataType»

Type	Package	Stereotypes
<i>ResourceType</i>	ExtensionAdministrativeAndSocialGovernmentalServices	«dataType»

5.4.2.1. Data types

5.4.2.1.1. *OccupancyType*

OccupancyType	
Name:	occupancy type
Definition:	Description of a group of occupants.
Stereotypes:	«dataType»
Attribute: numberOfOccupants	
Name:	number of occupants
Value type:	Integer
Definition:	Number of occupants.
Multiplicity:	1
Stereotypes:	«voidable»
Attribute: typeOfOccupant	
Name:	type of occupant
Value type:	PT_FreeText
Definition:	Qualitative description of a group of occupants.
Description:	EXAMPLE: Elderly people, partly immobile.
Multiplicity:	1

5.4.2.1.2. *ResourceType*

ResourceType	
Name:	resource type
Definition:	Description of a single technical resource.
Description:	EXAMPLE: Capacity of a fire water reservoir.
Stereotypes:	«dataType»

ResourceType	
Attribute: amount	
Name:	amount
Value type:	Measure
Definition:	Quantitative description of a technical resource.
Multiplicity:	1
Stereotypes:	«voidable»
Attribute: typeOfTechnicalMeans	
Name:	type of technical means
Value type:	PT_FreeText
Definition:	Qualitative description of a technical resource.
Multiplicity:	1

5.4.2.2. Code Lists

5.4.2.2.1. *ServiceLevelValue*

ServiceLevelValue	
Name:	service level value
Definition:	Classification of European territorial units, based on EUROSTAT values (extension to sub-national levels).
Extensibility:	none
Identifier:	http://inspire.ec.europa.eu/codelist/ServiceLevelValue
Values:	The allowed values for this code list comprise only the values specified in the INSPIRE Registry.

5.4.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

5.4.2.3.1. *Integer*

Integer	
Package:	Numerics
Reference:	Geographic information — Conceptual schema language [ISO/TS 19103:2005]

5.4.2.3.2. Measure

Measure	
Package:	ProductionAndIndustrialFacilitiesExtension
Reference:	INSPIRE Data specification on Production and Industrial Facilities [DS-D2.8.III.8]
Definition:	Declared or measured quantity of any kind of physical entity.

5.4.2.3.3. PT_FreeText

PT_FreeText	
Package:	Cultural and linguistic adaptability
Reference:	Geographic information — Metadata — XML schema implementation [ISO/TS 19139:2007]

5.4.3. Externally governed code lists

There are not externally governed code list in this application schema.

5.5. Application schema Environmental Management Facilities

5.5.1. Description

5.5.1.1. Narrative description

The Environmental Management Facilities application schema introduces a single Feature Type named *EnvironmentalManagementFacility*, which is defined as follows:

A physical structure designed, built or installed to serve specific functions in relation to environmental material flows, such as waste or waste water flows, or a delimited area of land or water used to serve such functions.

EnvironmentalManagementFacility is modelled as specialisation of the INSPIRE Generic Conceptual Model Feature Type *ActivityComplex* and the extended *DataTypes* described on it.

The environmental management facility data as defined by the Environmental Management Facilities application schema can be categorised as follows:

- Identification
- Spatiality (extent or position, any type of geometry)
- Temporality (start and potentially end of existence in the "real world")
- Classification and basic information, consisting of the following details:
 - Facility functions, i.e., activities and types of input/output the facility is designed or built for.
Example: incineration of residual waste;
 - Facility capacities in relation to activities and types of input/output.
Example: physical capacity to incinerate 250000 tons of residual waste per year;
 - Permissions granted in relation to the facility, especially permitted functions and/or capacities.
Example: permission to incinerate at most 100000 tons of residual waste per year;
 - Classification of the type of facility.
Example: installation or site;
 - Parties related to the facility, such as operators, owners or competent authorities;
 - Parties related to facility permissions, such as the authority granting a permission;
 - Facility service hours;
 - The link to parent facilities, i.e., other environmental management facilities of which the facility is a part.
Note: The link to parent facilities makes it possible to represent facility hierarchies, such as a number of installations on one site, or multiple installations that are parts of another installation.

The objectives for the development of the Environmental Management Facilities application schema were as follows:

- To cover the most essential use case requirements from environmental management, foremost waste management;
- To harmonise with respect to identical or similar requirements from other themes, especially Production and Industrial Facilities (PF) and Agricultural Facilities (AF);
- To support avoidance of redundancy in data instances;
- To avoid redundancy in the application schema and the data specification.

In the field of waste management the concepts of *site* and *installation* are very common. These terms are used in legislation such as the EU directive on waste (2008/98) and the EU regulation on a Pollutant Release and Transfer Register (PRTR) (2006/166). In the Environmental Management Facilities application schema these concepts are covered with the single Feature Type *EnvironmentalManagementFacility* for the following reasons:

1. While in the majority of cases there is clarity about whether something qualifies as a site or as an installation, there are also other cases where such a clear distinction may not be possible. For example, a landfill could qualify as both site and installation;
2. The information relevant to sites, such as spatial extents or positions, permissions, operators, etc. is similar or corresponding to the information relevant to installations. Thus redundancy in the application schema is avoided by using a single Feature Type.

The vast majority of *EnvironmentalManagementFacility* content is derived from the Generic Conceptual Model *ActivityComplex* Feature Type and its recommended Data Types. This ensures close alignment with various related Annex III Feature Types, especially ones from Production and Industrial Facilities (PF) and Agricultural Facilities (AF). The *ActivityComplex* Feature Type includes a classification of activities according to the *Statistical Classification of Economic Activities in the European Community (NACE)*. A description of the NACE codelist and of the other codelists in use in the application schema is given in the last paragraphs of this section. The functions considered for the *Environmental Management Facilities* Theme fall mainly under the NACE rev. 2 category E "*Water supply; Sewerage; Waste management and remediation activities*".

The *EnvironmentalManagementFacility* Feature Type includes the same basic temporality information that is common with all INSPIRE Feature Types, especially the date from which and optionally the date up to which the object exists or existed in the "real world". Additional temporality information can be provided in relation to permissions. For permissions, both the validity period as well as the date when the permission was granted is taken into account in the application schema.

There are associations with three of the Annex I Feature Types from *EnvironmentalManagementFacility*. These are:

1. *Address* (facility address);
2. *CadastralParcel* (cadastral parcels covered by the facility);
3. *AbstractBuilding* (buildings wherein the facility is located or considered part of the facility);

The application schema makes use of several standardised codelists most of them inherited from the Activity Complex Model:

- Statistical Classification of Economic Activities in the European Community (NACE)

http://ec.europa.eu/eurostat/ramon/nomenclatures/index.cfm?TargetUrl=LST_CLS_DLD&StrNom=NACE_REV2&StrLanguageCode=EN&StrLayoutCode=HIERARCHIC

Sample entries (out of a total number of 615 entries):

- 01.11 - Growing of cereals (except rice), leguminous crops and oil seeds
- ...
- 38.11 - Collection of non-hazardous waste
- 38.12 - Collection of hazardous waste
- 38.21 - Treatment and disposal of non-hazardous waste
- 38.22 - Treatment and disposal of hazardous waste

- 38.31 - Dismantling of wrecks
- 38.32 - Recovery of sorted materials
- 39.00 - Remediation activities and other waste management services
- ...
- 99.00 - Activities of extraterritorial organisations and bodies
- List of economic activities according to Annex I Section 8 of Regulation (EC) No 2150/2002 on waste statistics

<http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=CELEX:32002R2150:EN:NOT>

Sample entries (out of a total number of 20 entries):

- 1 – Agriculture, hunting and forestry
- ...
- 17 – Recycling
- 18 – Wholesale of waste and scrap
- 19 – Sewage and refuse disposal, sanitation and similar activities
- 20 – Waste generated by households
- List of recovery and disposal operations according to Annex I and Annex II of Directive 2008/98/EC on waste

<http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=CELEX:32008L0098:EN:NOT>

Sample entries (out of a total number of 28 entries):

- R1 - Use principally as a fuel or other means to generate energy
- R2 - Solvent reclamation/regeneration
- ...
- R10 - Land treatment resulting in benefit to agriculture or ecological improvement
- R11 - Use of waste obtained from any of the operations numbered R 1 to R 10
- R12 - Exchange of waste for submission to any of the operations numbered R 1 to R 11
- R13 - Storage of waste pending any of the operations numbered R 1 to R 12 (excluding temporary storage, pending collection, on the site where the waste is produced)
- D1 - Deposit into or on to land (e.g. landfill, etc.)
- D2 - Land treatment (e.g. biodegradation of liquid or sludgy discards in soils, etc.)
- D3 - Deep injection (e.g. injection of pumpable discards into wells, salt domes or naturally occurring repositories, etc.)
- ...
- D11 - Incineration at sea
- D12 - Permanent storage (e.g. emplacement of containers in a mine, etc.)
- D13 - Blending or mixing prior to submission to any of the operations numbered D 1 to D 12

- D14 - Repackaging prior to submission to any of the operations numbered D 1 to D 13
- D15 - Storage pending any of the operations numbered D 1 to D 14 (excluding temporary storage, pending collection, on the site where the waste is produced)
- EU Decision 2000/532 List of Wastes

<http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=CELEX:32000D0532:EN:NOT>

<http://www5.umweltbundesamt.at/dataharmonisation/codelist/ev7jv8yw2ndj9awiygm7z5kee7qy.html>

Sample entries (out of a total number of 839 entries):

- 01 01 01 - Wastes from mineral metalliferous excavation
- 01 01 02 - Wastes from mineral non-metalliferous excavation
- ...
- 20 03 06 - Waste from sewage cleaning
- 20 03 07 - Bulky waste
- 20 03 99 - Municipal wastes not otherwise specified
- Eurostat Statistical Classification of Products by Activity in the European Economic Community

http://ec.europa.eu/eurostat/ramon/nomenclatures/index.cfm?TargetUrl=LST_CLS_DLD&StrNom=CPA_2008&StrLanguageCode=EN&StrLayoutCode=HIERARCHIC

Sample entries (out of a total number of 3520 entries):

- 01.11.11 - Durum wheat
- 01.11.12 - Wheat, except durum wheat
- ...
- 38.11.11 - Collection services of non-hazardous recyclable waste, municipal
- 38.11.19 - Collection services of non-hazardous recyclable waste, other
- ...
- 38.11.51 - Glass waste
- 38.11.52 - Paper and paperboard waste
- ...
- 38.11.55 - Plastic waste
- ...
- 99.00.10 - Services provided by extraterritorial organisations and bodies

5.5.1.2. UML Overview

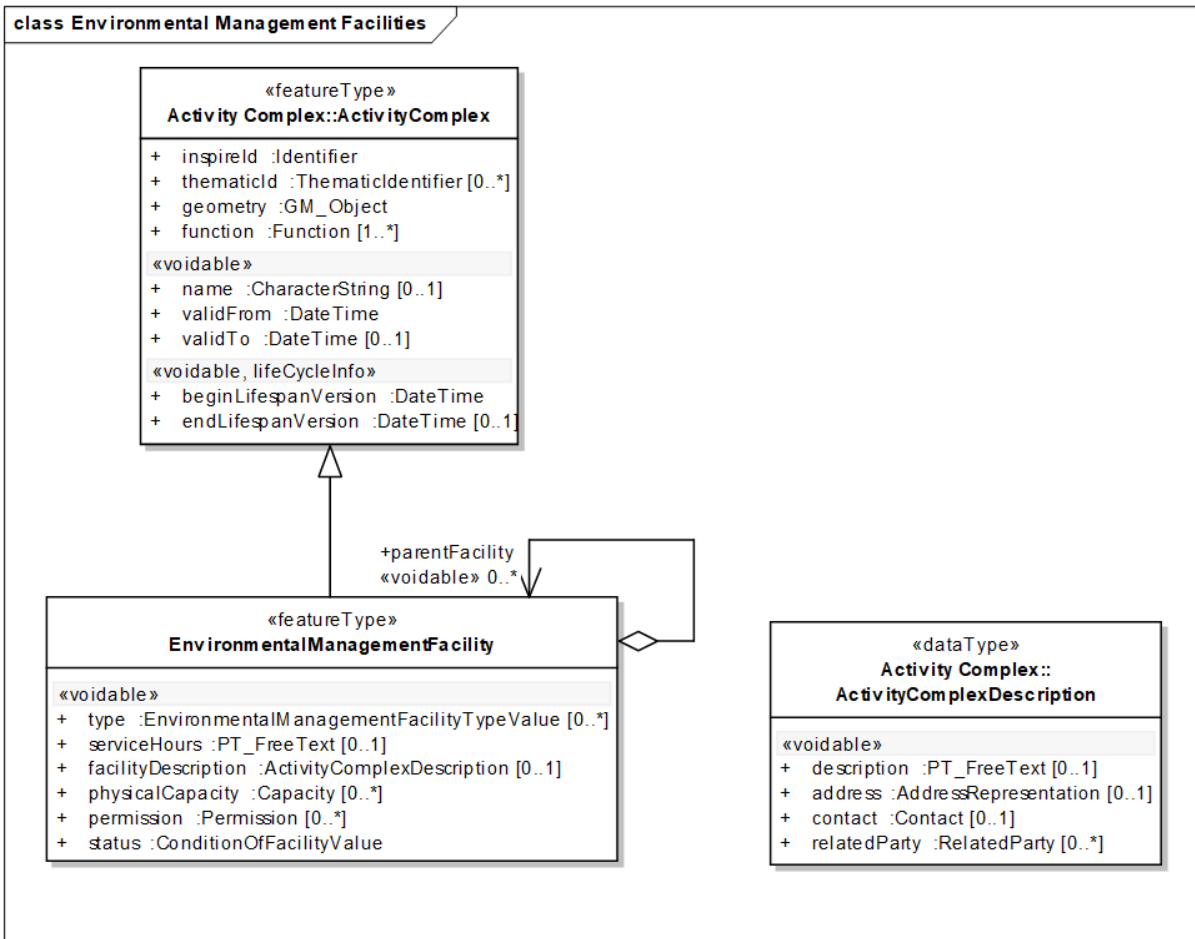


Figure 6 – UML class diagram: Overview of the Environmental Management Facilities application schema

class Environmental Management Facilities Datatypes

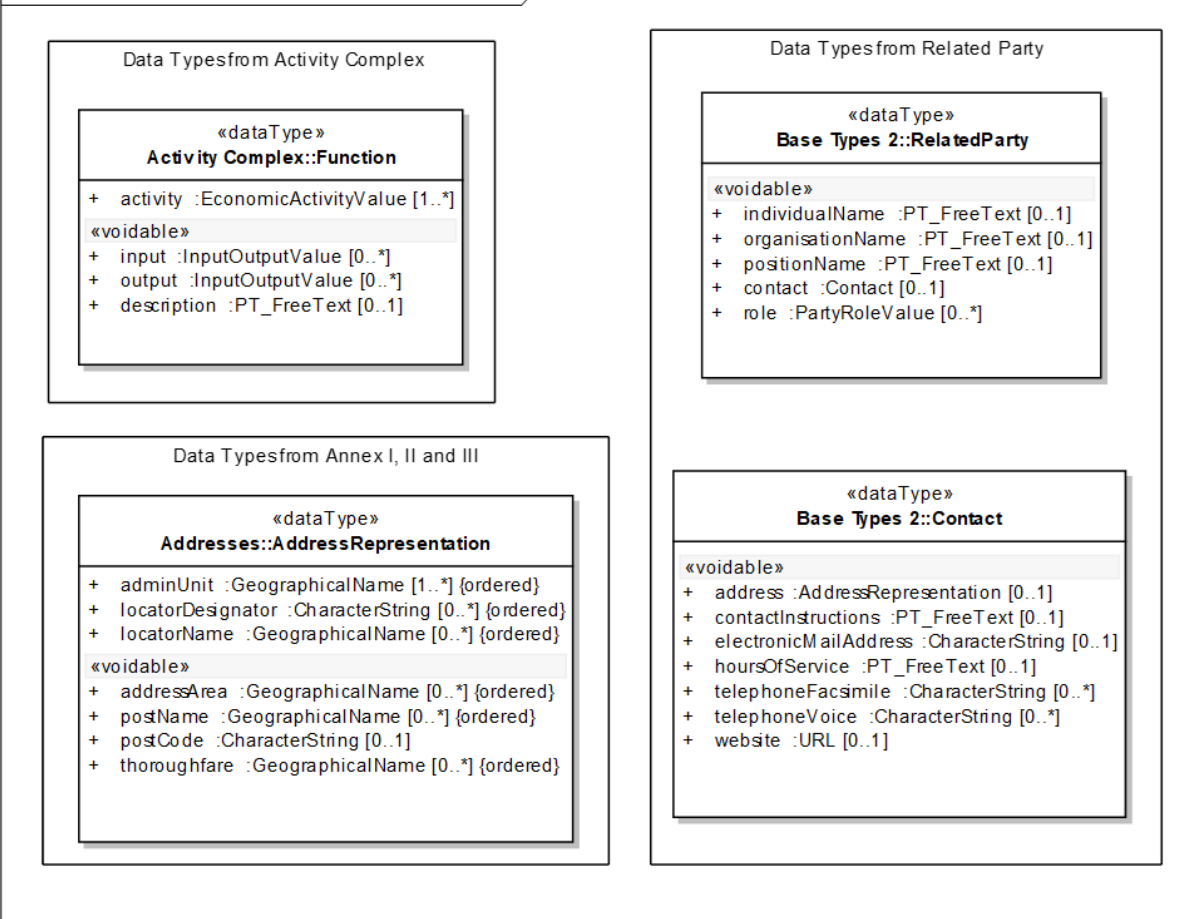


Figure 7 – UML class diagram: US "Environmental Management Facilities" application schema, Data Types

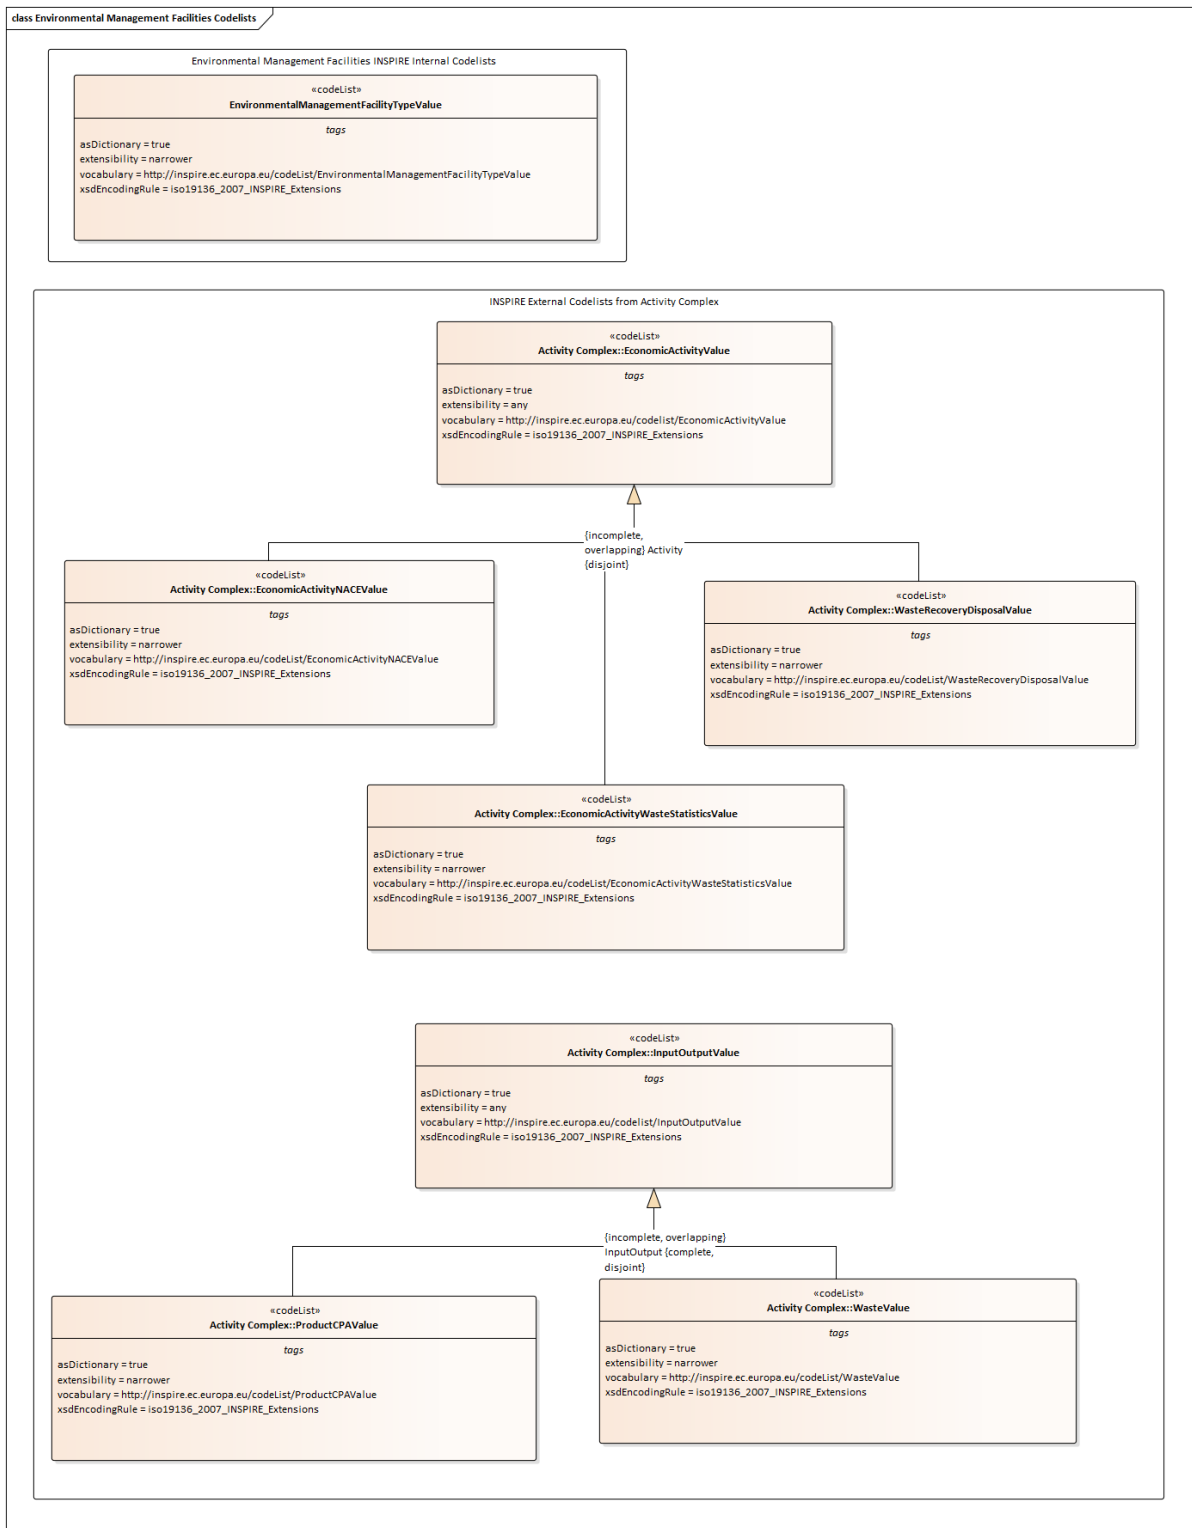


Figure 8 – UML class diagram: US "Environmental Management Facilities" application schema, Code Lists

5.5.1.3. Consistency between spatial data sets

Nothing more than what's written in the general introduction.

5.5.1.4. Identifier management

The *Environmental Management Facilities* application schema uses the Identifier dataType from the INSPIRE General Conceptual Model [DS-D2.5]. These identifiers include version number, so can be

used to track changes to an object.

Identifiers may have been assigned to Environmental Facilities in multiple contexts and datasets (legal registration, registry based on legislation, etc.). In the thematicId attribute, which is of unbounded multiplicity, any such identifiers can be represented in application schema data instances.

Recommendation 8



The identifier provided must be unique and representative for the Facility from the point of view of the geographical representation. Generic Identifiers not directly linked with geographical entities should be avoided (e.g. Company Name Identifier).

5.5.1.5. Modelling of object references

References to data types are represented using attributes of the relevant data type.

5.5.1.6. Geometry representation

Datasets relating to Environmental Facilities may be provided by different organizations, especially private and public administration related with waste and waste water management. Independently of the level of detail the geographical position of the facility should be represented at least as a "point".

According to the most generic legislation (waste, IPPC, E-PRTR) the geographical information is required in the form of geographical coordinates (X,Y). In certain cases the geographical position can be estimated by automatic processing of addresses provided at the facility's registration. Care has to be taken though to avoid that automatic processing yields incorrect geospatial positions, such as in cases where a legal address is provided instead of a facility address.

If a single facility is considered to be composed of separate geographical extents not connected to each other, then it is valid to provide just the one continuous extent which can be regarded as the main one. It is however not valid to provide the centroid of the separate extents as the facility's position.

References to addresses, cadastral parcels or buildings shall be provided in addition to geographical position or extent information, but not as the only spatiality information of environmental facilities.

In some cases related with activities which cover a representative extension of land, "Sites", this could be provided as the geographical representation of the facility, described as polygons (2D) in Local – Regional Datasets. Based on this option, the model includes an extension for this particular case. In some cases "Sites" or Polygons in which the facility is placed could be linked with cadastral parcels but this relation seems to be quite complex from the ontological point of view.

Other kind of potential geo-referenced information is required under the legislation embedded on documents and descriptions requested without references to specific formats. This option only could be resolved with external elements (like URL's) or the inclusion of raster layers (out of scope).

The model is open to other kind of detailed elements included on the Facility (e.g. Installations, Technical Units). These elements should be represented by points topologically related with the "Site" or the Facility. In some cases, the geographical representation could be coincident and inherited from the higher hierarchical level to which they belong.

Recommendation 9



Only tested geographical information should be provided in order to guarantee a minimum error respecting the real perimeter (real emplacement) of the Facility. Information is valid if the coordinates are inside the perimeter (It's not required to be the centroid) or in a margin of 100 meters around it for State or European scale.

5.5.1.7. Temporality representation

Nothing more than what's written in the general introduction.

5.5.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Environmental Management Facilities
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>EnvironmentalManagementFacility</i>	Environmental Management Facilities	«featureType»
<i>EnvironmentalManagementFacilityTypeValue</i>	Environmental Management Facilities	«codeList»

5.5.2.1. Spatial object types

5.5.2.1.1. *EnvironmentalManagementFacility*

EnvironmentalManagementFacility

Name:	environmental management facility
Subtype of:	ActivityComplex
Definition:	A physical structure designed, built or installed to serve specific functions in relation to environmental material flows, such as waste or waste water flows, or a delimitable area of land or water used to serve such functions.
Description:	<p>EXAMPLE In the context of waste management the "specific function" may be a waste recovery or disposal operation. Typically, waste management sites and waste management installations (such as incineration plants, landfills or storages) get distinguished. Multiple waste management installations may be found at the same site. Waste management installations can be a part of other waste management installations.</p> <p>The functions considered for the Environmental Facilities Theme fall mainly under the NACE rev. 2 category E "Water supply; Sewerage; Waste management and remediation activities".</p>
Stereotypes:	«featureType»

Attribute: type

Name:	type
Value type:	EnvironmentalManagementFacilityTypeValue
Definition:	The type of facility, such as installation or site.
Multiplicity:	0..*
Stereotypes:	«voidable»

Attribute: serviceHours

Name:	service hours
Value type:	PT_FreeText
Definition:	Service hours of the facility.
Multiplicity:	0..1
Stereotypes:	«voidable»

EnvironmentalManagementFacility

Attribute: facilityDescription

Name:	facility description
Value type:	ActivityComplexDescription
Definition:	Additional information on an Environmental Management Facilities, including its address, a contact details, related parties and a free text description.
Multiplicity:	0..1
Stereotypes:	«voidable»

Attribute: physicalCapacity

Name:	physical capacity
Value type:	Capacity
Definition:	A quantification of an actual or potential ability to perform an activity, that typically does not change, does not change often, or does not change to a significant degree.
Description:	NOTE Capacity could refer depending of the thematic scope to different concepts included on the legislation as "emission limits", "capacity incineration", "nominal capacity", "objective estimation data", "rate of desulphurization" or "recycling rate".
Multiplicity:	0..*
Stereotypes:	«voidable»

EnvironmentalManagementFacility

Attribute: permission

Name:	permission
Value type:	Permission
Definition:	Official Decision (formal consent) granting authorization to operate all or part of an Environmental Management Facility , subject to certain conditions which guarantee that the installation or parts of installations on the same site operated by the same operator complies with the requirements fixed by the law or standards. A permit may cover one or more functions and fix parameters of capacity; The term may be extended to other kind of certificates or documents of special relevance depending of the scope (e.g. ISO, EMAS, National Quality Standards, etc).
Description:	<p>NOTE This terms is referred in several legislative acts as "permit" , "authorization", "development consent" or "exploration permit" among others.</p> <p>EXAMPLE 1 "...a [written] decision by which the competent authority grants permission to operate all or part of an installation" ;</p> <p>EXAMPLE 2 ".. the decision of the competent authority or authorities which entitles the developer</p>
Multiplicity:	0..*
Stereotypes:	«voidable»

Attribute: status

Name:	status
Value type:	ConditionOfFacilityValue
Definition:	The status of the Environmental Management Facility, such as operational or decommissioned.
Multiplicity:	1
Stereotypes:	«voidable»

EnvironmentalManagementFacility	
Association role: parentFacility	
Name:	parent facility
Value type:	EnvironmentalManagementFacility
Definition:	A parent facility, i.e., a facility to which this facility belongs.
Description:	A facility may belong to multiple other facilities.
Multiplicity:	0..*
Stereotypes:	«voidable»

5.5.2.2. Code lists

5.5.2.2.1. *EnvironmentalManagementFacilityTypeValue*

EnvironmentalManagementFacilityTypeValue	
Name:	environmental facility classification
Definition:	Classification of environmental facilities, such as into sites and installations.
Extensibility:	narrower
Identifier:	http://inspire.ec.europa.eu/codelist/EnvironmentalManagementFacilityTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and narrower values defined by data providers.

5.5.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

5.5.2.3.1. *ActivityComplex*

ActivityComplex	
Package:	Activity Complex
Reference:	INSPIRE Data Specifications – Base Models – Activity Complex, version 1.0 [DS-D2.10.3]
Definition:	A "single unit", both technically and economically, under the management control of the same legal entity (operator), covering activities as those listed in the Eurostat NACE classification, products and services. Activity Complex includes all infrastructure, equipment and materials. It must represent the whole area, at the same or different geographical location, managed by a "single unit".
Description:	<p>NOTE 1 This class describes the minimal set of elements necessary to describe and identify geographically a legal entity and the activities taken place on it under the context of a Environmental purposes.</p> <p>NOTE 2 "Activity Complex" could be assimilated to terms described on the legislation as Facility, Establishment, Plant, Holding, Organization ,Farm, Extractive Industries or Aquaculture Production Business among others</p> <p>EXAMPLE i.e. an Agro-business that is legally registered under the Emissions Directive.</p>

5.5.2.3.2. *ActivityComplexDescription*

ActivityComplexDescription	
Package:	Activity Complex
Reference:	INSPIRE Data Specifications – Base Models – Activity Complex, version 1.0 [DS-D2.10.3]
Definition:	Additional information about an activity complex, including its description, address, contact and related parties.

5.5.2.3.3. *Capacity*

Capacity

Package:	Activity Complex
Reference:	INSPIRE Data Specifications – Base Models – Activity Complex, version 1.0 [DS-D2.10.3]
Definition:	A quantification of an actual or potential ability to perform an activity, that typically does not change, does not change often, or does not change to a significant degree.
Description:	NOTE Capacity could refer depending of the thematic scope to different concepts included on the legislation as "emission limits", "capacity incineration", "livestock units", "nominal capacity", "objective estimation data", "rate of desulphurization" or "recycling rate".

5.5.2.3.4. *ConditionOfFacilityValue*

ConditionOfFacilityValue

Package:	Base Types
Reference:	INSPIRE Generic Conceptual Model, version 3.4 [DS-D2.5]
Definition:	The status of a facility with regards to its completion and use.

5.5.2.3.5. *PT_FreeText*

PT_FreeText

Package:	Cultural and linguistic adaptability
Reference:	Geographic information — Metadata — XML schema implementation [ISO/TS 19139:2007]

5.5.2.3.6. *Permission*

Permission	
Package:	Activity Complex
Reference:	INSPIRE Data Specifications – Base Models – Activity Complex, version 1.0 [DS-D2.10.3]
Definition:	Official Decision (formal consent) granting authorization to operate all or part of an Activity Complex, subject to certain conditions which guarantee that the installations or parts of installations on the same site operated by the same operator comply with the requirements fixed by a competent authority. A permit may cover one or more functions and fix parameters of capacity. The term could be extended to other kind of certificates or documents of special relevance depending of the scope (e.g. ISO, EMAS, National Quality Standards, etc). The term may be extended to other kind of certificates or documents of special relevance depending of the scope (e.g. ISO, EMAS, National Quality Standards, etc).
Description:	<p>NOTE This terms is referred in several legislative acts as "permit" , "authorization", "development consent" or "exploration permit" among others.</p> <p>EXAMPLE 1 "...a [written] decision by which the competent authority grants permission to operate all or part of an installation" ;</p> <p>EXAMPLE 2 ".. the decision of the competent authority or authorities which entitles the developer to proceed with the project..".</p>

5.5.3. Externally governed code lists

No externally governed code lists is included in the "Environmental Management Activities" application schema apart for those described to Activity Complex.

5.6. Application Schemas "Utility Networks"

Definition

Utility services and networks include the physical constructions for transport of utility products - namely pipelines for transport of oil, gas, chemicals, water, sewage and thermal products – and cables for transmission of electricity, phone and cable-TV signals, etc.

All kinds of utility systems have nodes like e.g. pump stations, and they are linked to facilities for

production and treatment of different kinds of utility products. These major production and treatment sites are treated in the theme production and industrial facilities.

Description

It is acknowledged that each organization has different responsibilities and this will influence the kind of data they collect, manage and use. Some organizations will use simple models while other will have more complex data models.

This data specification is a basic framework that user can adopt and, if necessary, adapt and extend for themselves. The specification is focused on the core spatial objects required by networks, i.e. network centrelines etc.

Not all the application-specific spatial objects (e.g. flow measurement sensors) are incorporated. Non-geographic data (e.g. information on flow in m³/s) is also out of scope of this specification.

Abstract

To support a consistent approach to all themes the European Commission, through the Data Specifications Drafting Team, developed the "Generic Conceptual Model" [GCM] which was reviewed and published prior to the commencement of work on the Annex II and III themes. This is the foundation model for every utility network – with the intention that any additional network may be combined in future and used in a way that is predicable.

The scope of the INSPIRE Utility Networks Data Product Specification incorporates six distinct utility themes:

- Water Network
- Sewer Network
- Electricity Network
- Oil, Gas & Chemicals Network
- Thermal Network
- Telecommunications (Excluded from the IRs)

Understanding of the Generic Conceptual Model is essential and the GCM/GNM should be read in conjunction with this document. The GCM describes the basic form of real world abstraction. The GNM adapts this and describes the basic concepts that underpin and define the common Utility Networks Application Schema upon which all six themes are based. The GCM relies on ISO standards and the 19xxx series in particular.

Purpose

The purpose of this document is to specify a harmonized data specification for the spatial data theme Utility Networks, being a sub-scope of the Utility and Governmental Services, as defined in Annex III of the INSPIRE Directive.

This data specification is provided as basic framework that users can adopt and - if required – extend for themselves. The model is structured to maximize reuse and the sharing of organizational data about a network. The specification is concerned only with the core spatial

objects required by Utility Networks. This specification is mainly focused on the "widely reused – widely referenced" segment of spatial objects (e.g. utility pipes" centerlines, or utility node objects).

Associated "non-Geographic" data

Any "non geographic data" (the majority of the data holdings in any organization) – is also out of scope of this specification – such records maybe "an asset condition report", "flow report", "images of assets", "statistics" and so on. Therefore much of the data used in the utility industry is classified as application-specific. While associated with the network, all these examples are closer to the application end of the spectrum than generic use by a wide community whether they represent a geographic entity or non- geographic data.

To maximize reuse, the linkage of such organizational data with the spatial objects should be "loose" in the sense that these are ideally defined as different data objects in a database. Configured correctly such data may then be reused in several different applications and any associated information shared and exchanged as desired.

Applications and use cases

The following use cases are highlighted to demonstrate the width and breadth of applications (the list is not exhaustive):

- **Asset Management**
- Capacity Planning
- Construction
- **Design & Planning**
- Disaster management
- Emergency response
- Environmental Impact Assessments
- Estate management
- Flow modelling
- Maintenance

The applications in bold above were used as use cases in the preparation of this specification. These represent applications at the European, national, local public sector levels and in the private sector. It is evident that the scope of the specification does not attempt to support all these applications. User extensibility is supported and encouraged. Future model extensions may incorporate further object types if it is felt that further standardization is necessary.

Characteristics of the specification

The key characteristics of the Utility Networks datasets are:

- They contain information of specific interest for the public sector in its role to support economic growth through efficient utility networks (electricity, telecommunications, water, sewer, etc.)

- The information is applicable from local to European levels of operation.
- The data represents a structure or methods of operation that is stable over time (even if parts of the data content frequently changes, e.g. telecommunications).
- Supports cross border (pan-European) applications.
- Being a part of the European Spatial Data Infrastructure the data may be more easily used with other kinds of data themes, such as geographical names, administrative units, and addresses etc.

Spatial resolution and Topology

In the real world, objects are connected to each other: an optical cable is connected to a multiplexer that in turn is connected to copper cables connecting into our homes to provide cable TV, telephony and internet access. Using GIS to support network utility management typically involves many types of features that may have connectivity to each other.

Topology in GIS is generally defined as the spatial relationship between connecting or adjacent features, and is an essential prerequisite for many spatial operations such as network analysis. Utility networks can be described as NaN (Node-Arc-Node) network using two basic geometric types: points (aka nodes) and polylines (aka arcs). NaN topologies can be directed or un-directed, depending on specific type of network (i.e. water networks are directed, while telecommunications networks are not). Such topology structure provides an automated way to handle digitizing and editing errors, and enable advanced spatial analyses such as adjacency, connectivity and containment. Infrastructure networks rely on the Generic network model.

That being said, Utility Networks support single spatial resolution. Containment (e.g. equipment being installed in manholes or on poles) is not taken in account as a different Level of Detail (LOD).

The topology or spatial relationships between utility network features can be defined explicitly by referring nodes within links and vice versa. But this is an option and so is not mandatory.

According to the Generic Network Model, the relations between starting/ending nodes and links are avoidable, therefore these relationships can be provided if the source data already contains this information, but if the source data doesn't contain this relationship information a data provider should not be forced to provide them. In the latter case, such topology could be implicit if the source data is sufficiently clean in which a users' application could construct such topology automatically.

Furthermore, the cardinality of the links is mentioned to be [0..1] or [0..*], so a dataset can be INSPIRE compliant, even if containing no relation between links and nodes.

Color-coding used on model classes

In order to facilitate easier reading of the Utility Networks UML model, color-coding on the UML model classes is used. This helps to visually recognize immediately the different kind of model classes.

With the color-coding we differentiate the abstract featureTypes, main and common featureTypes from the Utility Networks Profile, featureTypes from Extended Utility Networks, codelists from Core and from Extended Utility Networks. These are the assigned codes:

- **default white (EA)** for abstract featureTypes
- **green** for the common featureTypes
- **red** for the main featureTypes from a particular utility network
- **yellow** for the featureTypes of Extended
- **grey** for the codelists of the Utility Networks Profile
- **dark grey** for the codelist of Extended Utility Networks

Organisation of the diagrams

For the Utility Networks Profile there is one Common Application Schema that contains all the common elements shared among thematic packages and "applicationSchema" packages for each utility network type (Electricity, Oil-Gas-Chemicals, Sewer, Thermal and Water) with one diagram for each "applicationSchema"

The Abstract Types in the Utility Networks Profile inherit much from the generic Network model from the GCM. The Utility Networks Profile can be used if a data provider has data available based on a node-arc-node topological concept. The node-arc-node logic is represented in the GCM using Node and Link featureTypes which contain associations in both directions.

The Utility Networks Profile extends the Network LinkSet, Node and Network featureTypes with respectively *UtilityLinkSet*, *UtilityNode* and *UtilityNetwork* featureTypes.

The *UtilityNodeContainer* featureType has no counterpart in the generic Network model. This *UtilityNodeContainer* featureType has a part-relationship with *UtilityNode*, indicating a utility container object can contain many utility node objects.

The *UtilityNetworkElement* contains the properties that are common to all these abstract utility featureTypes.

UtilityNetworkElement has two special properties for referencing features of other themes that are related to the Utility Network (sub) theme. One is "utilityFacilityReference" which references an *ActivityComplex* featureType (from INSPIRE Base Models), which can be used to describe more complex objects that are utility facilities having a more complex geometry. The other one is "governmentalServiceReference" referencing a *GovernmentalService* feature (from Administrative and social governmental services (sub) theme of INSPIRE US), which can be used to refer to governmental service features that are conceptually related to utility network features.

The Utility Network Profile - Abstract Types further contain two codelists that are used by the two properties of the *UtilityLinkSet* featureType and two codelists from the INSPIRE Base Types.

5.7. "Common Utility Networks Elements" application schema

5.7.1. Description

5.7.1.1. Narrative description

The Common Types of the Utility Networks Profile contain the *Cable*, *Pipe* and *Duct* featureTypes. These are link objects which can extend the *UtilityLinkSet*.

These three featureTypes have various associations that can be used to model their real-life relationships:

- A Duct can contain multiple other Ducts, e.g. in case the outer duct is a larger construction containing multiple smaller ducts;
- A Duct can contain multiple Pipes, e.g. in case the duct acts as a protecting layer or as a construction to keep the pipes together;
- A Duct can contain multiple Cables, idem as with the Duct-Pipe relationship;
- A Pipe can contain multiple other Pipes, e.g. in case the other pipe is used to keep a number of inner pipes together;
- A Pipe can contain multiple Cables, idem as with the Pipe-Pipe relationship.

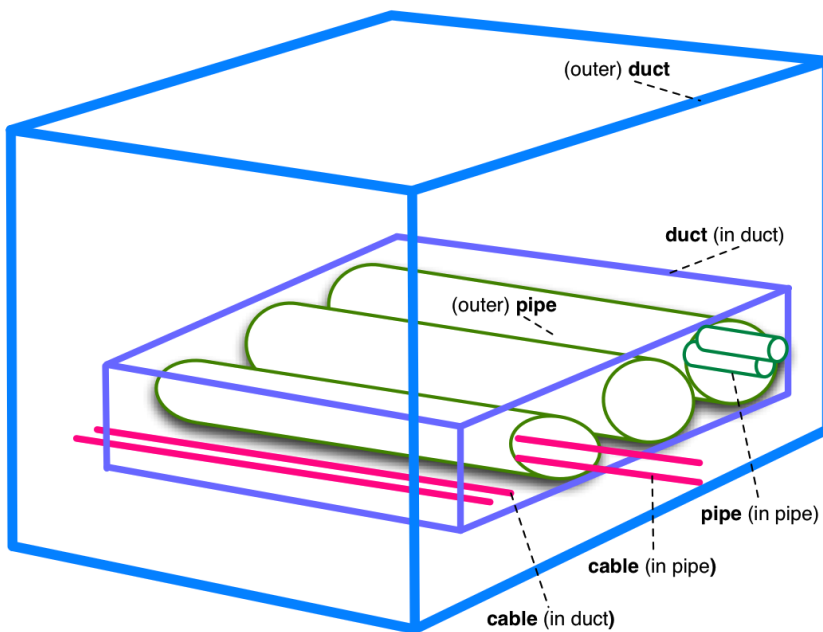


Figure 9 – Physical relations between cables, pipes and ducts

Cable is an abstract featureType and can be used in the various utility themes by concrete featureTypes (e.g. *ElectricityCable*).

Duct and Pipe on the other hand are not abstract, so this means that all utility themes can use the Duct and Pipe featureTypes as concrete featureTypes as part of their concrete utility network (e.g. *ElectricityNetwork* can have *ElectricityCables* and *Ducts*). Hence Duct and Pipe are here color-coded in green. Furthermore, Duct and Pipe can be used in utility networks that we call "crossTheme". This means that we can have a cross-theme utility networks with ducts and pipes that are used to encase cables and pipes from other utility network themes.

Cable, Pipe and Duct inherit from the abstract *UtilityLinkSet* featureType, but a constraint has been put on the Duct featureType indicating that the *utilityDeliveryType* property cannot be used in a Duct. This *utilityDeliveryType* property indicates that a link object is used in e.g. transport or

distribution type of utility networks. But a Duct can contain link objects from more than one specific utility network them, it should not use this property, which is expressed by the constraint.

The UtilityNetwork featureType has a property "utilityNetworkType" with a codelist "UtilityNetworkTypeValue" that describe the kind of utility network. Note that there's also a "crossTheme" utility network type that can be used for ducts and pipes for encasing of cables and pipes from other utility networks.

The UtilityNetwork featureType has a reflexive association, meaning a utility network can contain other networks. A UtilityNetwork has a number of authorities with different roles, but these roles can be different for certain parts of a utility network. This reflexive association allows to model this case by having a main utility network with several sub networks, each having different organisations - modelled using the RelatedParty data type (from INSPIRE Basic Types 2) - fulfilling the authority roles.

The UtilityNetwork featureType also uses the "utilityFacilityReference" property to allow to conceptually include a utility facility in a utility network.

There are four utility node container objects, indicated as green color-coded featureTypes, meaning they are concrete and can be used in all utility networks: *Manhole*, *Tower*, *Pole* and *Cabinet*.

Finally there is the Appurtenance featureType which has the "appurtenanceType" property and a hierarchy of codelists that can be used for values. The lowest level of codelists are codelists with the base values we provide in this data specification, but these can be extended for application specific purposes.

5.7.1.2. UML Overview

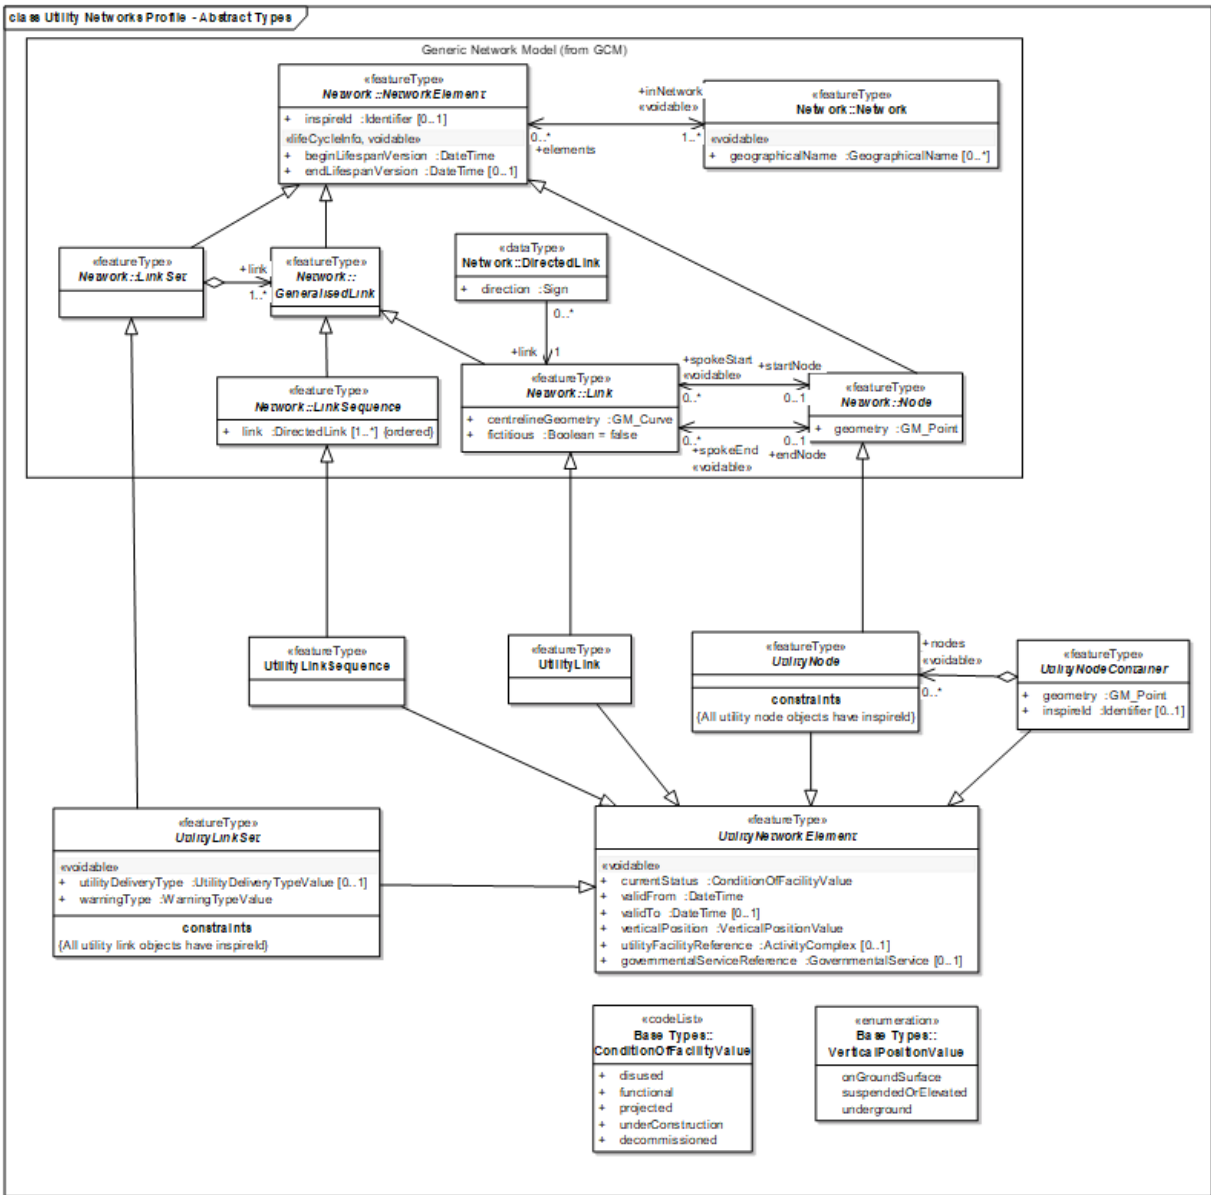


Figure 10 – UML class diagram: Overview of the "Utility Networks Profile - Abstract Types"

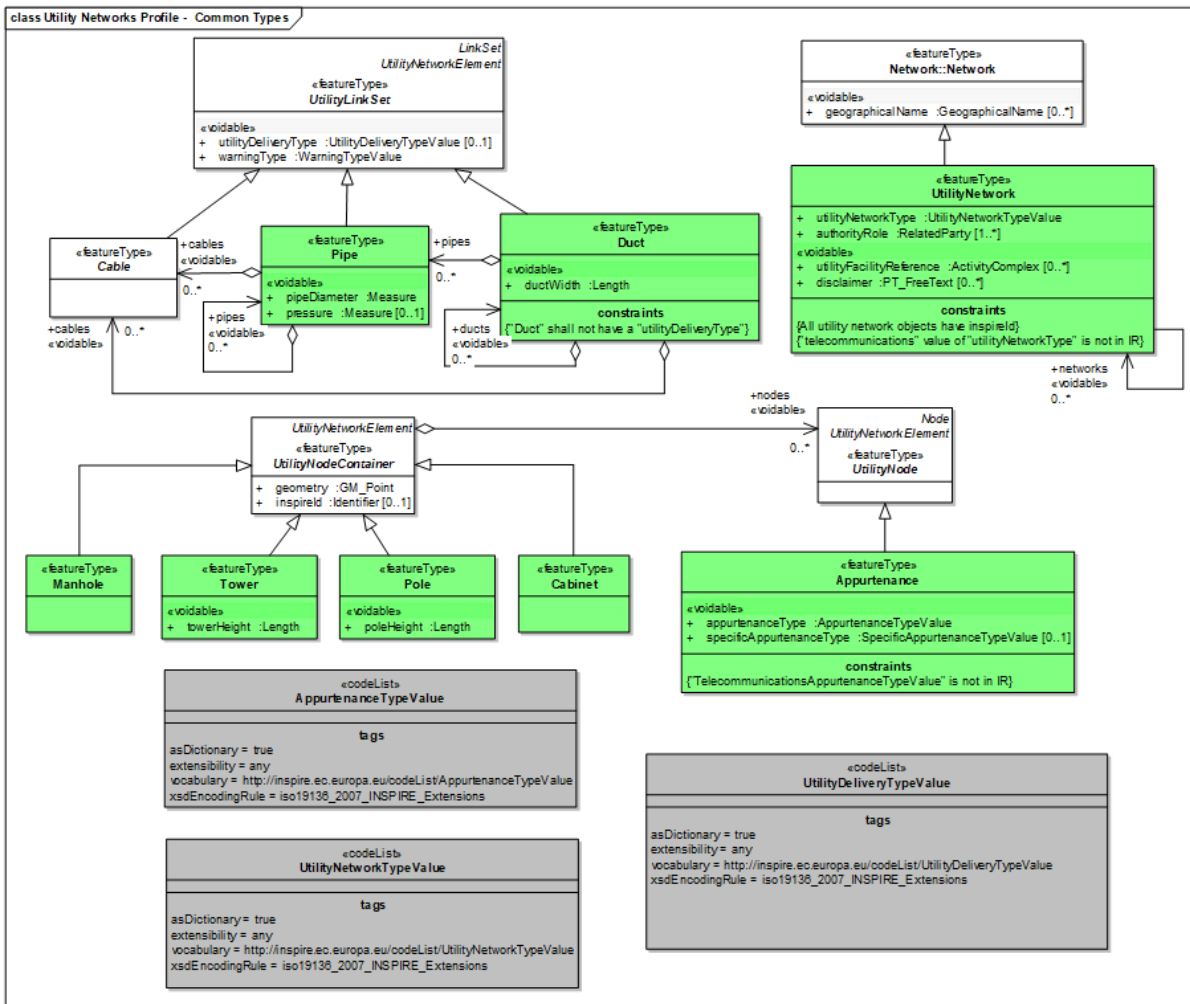


Figure 11 – UML class diagram: Overview of the "Utility Networks Profile - Common Types"

5.7.1.3. Consistency between spatial data sets

Nothing more than what's written in the general paragraph.

5.7.1.4. Identifier management

Nothing more than what's written in the general paragraph.

5.7.1.5. Modelling of object references

Nothing more than what's written in the general paragraph.

5.7.1.6. Geometry representation

There are two types of geometry in the specification:

- a. Centrelines objects in Utility Networks
- b. Point objects in Utility Networks

Type (b) are network nodes, but can also be used to associate appurtenances with the network (e.g. antenna, pump, treatment plant etc).

Levels of detail: The specification addresses the highest resolution of data capture in Utility Networks and is also applicable to any derived lower resolution levels of detail where the number of coordinates is reduced and the geometry simplified to support viewing and reporting at regional, national and European levels.

This specification cannot advise on the form of representation at the highest resolution nor the accuracy since this will be driven by member state needs. Ideally, derived lower resolution datasets will use the approach outlined in D2.6 A.19 where all the objects are related from lowest to highest resolution and any user information collected about the network can be simply aggregated at the lower lever or disaggregated as the user increases the resolution.

Local, Regional, National and European relevance of the specification

The datasets in scope are used extensively at the "local level" and extend to regional, national and European levels. Usage can change with levels of operation or within an organisation. The specification is mainly focused on establishing a more coherent approach to those datasets that are universally used, probably held at regional and local level and at the highest resolution within this context.

Seamless resolution representations at the local and regional level

Lower resolution datasets would be derived from the local/high resolution data - outlined in the previous paragraph – and referenced (no geographic) data could then be aggregated and disaggregated as desired.

Multiple representations at regional, national and European levels.

Ideally the same data would be scalable dynamically from local to European level seamlessly. Since the current datasets and methods are insufficiently mature to support this - several "levels of detail" will usually be stored to represent the network at different operational levels.

Unfortunately today there is very little correspondence between each level. Ideally it would be easy to seamlessly move from the highest to the lowest resolution with corresponding scaling and aggregation and disaggregation of the associated organisational information (as we do on statistical datasets) e.g. for reporting purposes or trans-European analysis, real-time management (SCADA), planning and policy making.

In the meantime this specification applies to all levels of detail, although data providers are encouraged to introduce this specification at the local level as a priority.



Recommendation 10

All Utility Networks spatial objects should be provided at the source resolution and accuracy where possible.



Recommendation 11

Lower order resolutions should be derived from the highest order representation of the utility network, and any user information should be captured once and referenced to each geometrical representation.

5.7.1.7. Temporality representation

Nothing more than what's written in the general paragraph.

5.7.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Common Utility Network Elements
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>Appurtenance</i>	Common Utility Network Elements	«featureType»
<i>AppurtenanceTypeValue</i>	Common Utility Network Elements	«codeList»
<i>Cabinet</i>	Common Utility Network Elements	«featureType»
<i>Cable</i>	Common Utility Network Elements	«featureType»
<i>Duct</i>	Common Utility Network Elements	«featureType»
<i>Manhole</i>	Common Utility Network Elements	«featureType»
<i>Pipe</i>	Common Utility Network Elements	«featureType»
<i>Pole</i>	Common Utility Network Elements	«featureType»
<i>SpecificAppurtenanceTypeValue</i>	Common Utility Network Elements	«codeList»
<i>Tower</i>	Common Utility Network Elements	«featureType»
<i>UtilityDeliveryTypeValue</i>	Common Utility Network Elements	«codeList»
<i>UtilityLink</i>	Common Utility Network Elements	«featureType»
<i>UtilityLinkSequence</i>	Common Utility Network Elements	«featureType»

Type	Package	Stereotypes
<i>UtilityLinkSet</i>	Common Utility Network Elements	«featureType»
<i>UtilityNetwork</i>	Common Utility Network Elements	«featureType»
<i>UtilityNetworkElement</i>	Common Utility Network Elements	«featureType»
<i>UtilityNetworkTypeValue</i>	Common Utility Network Elements	«codeList»
<i>UtilityNode</i>	Common Utility Network Elements	«featureType»
<i>UtilityNodeContainer</i>	Common Utility Network Elements	«featureType»
<i>WarningTypeValue</i>	Common Utility Network Elements	«codeList»

5.7.2.1. Spatial object types

5.7.2.1.1. Appurtenance

Appurtenance	
Name:	appurtenance
Subtype of:	UtilityNode
Definition:	An appurtenance is a node object that is described by its type (via the attribute "appurtenanceType").
Description:	The "appurtenanceType" attribute uses the "AppurtenanceTypeValue" codelist for its values. But this is an empty codelist that needs to be extended by a concrete codelist of appurtenance types for each utility network type. So e.g. for the electricity network, the "ElectricityAppurtenanceTypeValue" codelist should be used.
Stereotypes:	«featureType»

Appurtenance

Attribute: appurtenanceType

Name:	appurtenance type value
Value type:	AppurtenanceTypeValue
Definition:	Type of appurtenance
Description:	The "AppurtenanceTypeValue" codelist is an abstract codelist that can be replaced by the various appurtenance type value codelists for each utility network.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: specificAppurtenanceType

Name:	specific appurtenance type
Value type:	SpecificAppurtenanceTypeValue
Definition:	Type of appurtenance according to a domain-specific classification.
Multiplicity:	0..1
Stereotypes:	«voidable»

Constraint: "TelecommunicationsAppurtenanceTypeValue" is not in IR

Natural language:	
OCL:	

5.7.2.1.2. Cabinet

Cabinet	
Name:	cabinet
Subtype of:	UtilityNodeContainer
Definition:	Simple cabinet object which may carry utility objects belonging to either single or multiple utility networks.
Description:	Cabinets represent mountable node objects that can contain smaller utility devices and cables.
Stereotypes:	«featureType»

5.7.2.1.3. Cable

Cable (abstract)

Name:	cable
Subtype of:	UtilityLinkSet
Definition:	A utility link or link sequence used to convey electricity or data from one location to another.
Stereotypes:	«featureType»

5.7.2.1.4. Duct**Duct**

Name:	duct
Subtype of:	UtilityLinkSet
Definition:	A utility link or link sequence used to protect and guide cable and pipes via an encasing construction.
Description:	A Duct (or Conduit, or Duct-bank, or Wireway) is a linear object which belongs to the structural network. It is the outermost casing. A Duct may contain Pipe(s), Cable(s) or other Duct(s). Duct is a concrete feature class that contains information about the position and characteristics of ducts as seen from a manhole, vault, or a cross section of a trench and duct.
Stereotypes:	«featureType»

Attribute: ductWidth

Name:	duct width
Value type:	Length
Definition:	The width of the duct.
Description:	The measurement of the object - in this case, the duct - from side to side.
Multiplicity:	1
Stereotypes:	«voidable»

Duct

Association role: ducts

Name:	ducts
Value type:	Duct
Definition:	A single duct or set of ducts that constitute the inner-duct.
Multiplicity:	0..*
Stereotypes:	«voidable»

Association role: cables

Name:	cables
Value type:	Cable
Definition:	A duct may contain one or more cables.
Multiplicity:	0..*
Stereotypes:	«voidable»

Association role: pipes

Name:	pipes
Value type:	Pipe
Definition:	The set of pipes that constitute the duct bank.
Multiplicity:	0..*
Stereotypes:	«voidable»

Constraint: "Duct" shall not have a "utilityDeliveryType"

Natural language:	The multiplicity of "utilityDeliveryType" shall be 0
OCL:	inv: utilityDeliveryType → size()=0

5.7.2.1.5. Manhole

Manhole

Name:	manhole
Subtype of:	UtilityNodeContainer
Definition:	Simple container object which may contain either single or multiple utility networks objects.
Description:	
Stereotypes:	«featureType»

5.7.2.1.6. Pipe

Pipe

Name:	pipe
Subtype of:	UtilityLinkSet
Definition:	A utility link or link sequence for the conveyance of solids, liquids, chemicals or gases from one location to another. A pipe can also be used as an object to encase several cables (a bundle of cables) or other (smaller) pipes.
Stereotypes:	«featureType»

Attribute: pipeDiameter

Name:	pipe diameter
Value type:	Measure
Definition:	Pipe outer diameter.
Description:	For convex shaped objects (e.g. a circle) the diameter is defined to be the largest distance that can be formed between two opposite parallel lines tangent to its boundary.
Multiplicity:	1
Stereotypes:	«voidable»

Pipe

Attribute: pressure

Name:	pressure
Value type:	Measure
Definition:	The maximum allowable operating pressure at which a product is conveyed through a pipe.
Description:	The unit of measure for pressure is commonly expressed in "bar".
Multiplicity:	0..1
Stereotypes:	«voidable»

Association role: cables

Name:	cables
Value type:	Cable
Definition:	A pipe may contain one or more cables.
Multiplicity:	0..*
Stereotypes:	«voidable»

Association role: pipes

Name:	pipes
Value type:	Pipe
Definition:	A pipe may contain one or more pipes.
Multiplicity:	0..*
Stereotypes:	«voidable»

5.7.2.1.7. Pole

Pole

Name:	pole
Subtype of:	UtilityNodeContainer
Definition:	Simple pole (mast) object which may carry utility objects belonging to either single or multiple utility networks.
Description:	Poles represent node objects that can support utility devices and cables.
Stereotypes:	«featureType»

Pole

Attribute: poleHeight

Name:	pole height
Value type:	Length
Definition:	The height of the pole.
Description:	The height is the vertical extend measuring accross the object - in this case, the pole - at right angles to the lenght.
Multiplicity:	1
Stereotypes:	«voidable»

5.7.2.1.8. Tower

Tower

Name:	tower
Subtype of:	UtilityNodeContainer
Definition:	Simple tower object which may carry utility objects belonging to either single or multiple utility networks.
Description:	Towers represent node objects that support reservoirs, cables or antennas.
Stereotypes:	«featureType»

Attribute: towerHeight

Name:	tower height
Value type:	Length
Definition:	The height of the tower.
Description:	The height is the vertical extend measuring accross the object - in this case, the tower - at right angles to the lenght.
Multiplicity:	1
Stereotypes:	«voidable»

5.7.2.1.9. UtilityLink

UtilityLink

Name:	name — utility Link — definition — A linear spatial object that describes the geometry and connectivity of a utility network between two points in the network.
Subtype of:	LinkUtilityNetworkElement
Stereotypes:	«featureType»

5.7.2.1.10. UtilityLinkSequence

UtilityLinkSequence

Name:	name — utility Link Sequence — description — A linear spatial object, composed of an ordered collection of utility links, which represents a continuous path in the utility network without any branches. The element has a defined beginning and end and every position on the utility link sequence is identifiable with one single parameter.
Subtype of:	UtilityNetworkElementLinkSequence
Stereotypes:	«featureType»

5.7.2.1.11. UtilityLinkSet

UtilityLinkSet (abstract)

Name:	utility linkset
Subtype of:	LinkSetUtilityNetworkElement
Definition:	An abstract utility network class which groups common properties of Cable, Pipe and Duct featureTypes.
Description:	This class also extends the LinkSet featureType, which allows Cable, Pipe and Duct classes to use either the (more complex) LinkSequence or (more simple) Link class.
Stereotypes:	«featureType»

UtilityLinkSet (abstract)**Attribute: utilityDeliveryType**

Name:	utility delivery type
Value type:	UtilityDeliveryTypeValue
Definition:	Kind of utility delivery network e.g. transport, distribution, collection ...
Multiplicity:	0..1
Stereotypes:	«voidable»

Attribute: warningType

Name:	warning type
Value type:	WarningTypeValue
Definition:	Kind of overground visible warning mechanism used to indicate an underground utility network element.
Multiplicity:	1
Stereotypes:	«voidable»

Constraint: All utility link objects have inspireId

Natural language:	All utility link objects have an external object identifier.
OCL:	inv:inspireId → notEmpty()

5.7.2.1.12. UtilityNetwork

UtilityNetwork

Name:	utility network
Subtype of:	Network
Definition:	Collection of network elements that belong to a single type of utility network.
Description:	<p>In the real world, objects are connected to each other: an optical cable is connected to a multiplexer that in turn is connected to copper cables connecting into our homes to provide cable TV, telephony and internet access. Using GIS to support network utility management typically involves many types of features that may have connectivity to each other. Topology in GIS is generally defined as the spatial relationship between connecting or adjacent features, and is an essential prerequisite for many spatial operations such as network analysis. Utility networks can be described as NaN (Node-Arc-Node) network using two basic geometric types: points (aka <i>nodes</i>) and polylines (aka <i>arcs</i>). NaN topologies can be directed or un-directed, depending on specific type of network (i.e. water networks are directed, while telecommunications networks are not). Such topology structure provides an automated way to handle digitising and editing errors, and enable advanced spatial analyses such as adjacency, connectivity and containment. Infrastructure networks rely on Generic network model developed during Annex I.</p> <p>Note: Via the attribute "utilityNetworkType", that uses the "UtilityNetworkTypeValue" codelist, the type of utility network can be defined. E.g. by selecting the "sewer" value, the utility network becomes a "sewer utility network". Using the "crossTheme" value, a utility network can be created that contains e.g. ducts, which can contain pipes and cables from various utility network types.</p>
Stereotypes:	«featureType»

UtilityNetwork

Attribute: utilityNetworkType

Name:	utility network type
Value type:	UtilityNetworkTypeValue
Definition:	The type of utility network or the utility network theme.
Description:	Uses the codelist "UtilityNetworkTypeValue" to describe the possible utility networks. This also contains the "crossTheme" value to be used for utility networks that can contain cables or pipes from various themes, typically used by utility network providers that provide ducts.
Multiplicity:	1

Attribute: authorityRole

Name:	authority role
Value type:	RelatedParty
Definition:	Parties authorized to manage a utility network, such as maintainers, operators or owners.
Multiplicity:	1..*

Attribute: utilityFacilityReference

Name:	utility facility reference
Value type:	ActivityComplex
Definition:	Reference to a facility activity complex that is linked to (e.g. part of) this utility network.
Description:	This reference can be used to link utility facilities - having a more complex geometry - to a utility network.
Multiplicity:	0..*
Stereotypes:	«voidable»

UtilityNetwork

Attribute: disclaimer

Name:	disclaimer
Value type:	PT_FreeText
Definition:	Legal text describing confidentiality clauses applying to the utility network information.
Multiplicity:	0..*
Stereotypes:	«voidable»

Association role: networks

Name:	networks
Value type:	UtilityNetwork
Definition:	A single sub-network that can be considered as part of a higher-order utility network.
Multiplicity:	0..*
Stereotypes:	«voidable»

Constraint: "telecommunications" value of "utilityNetworkType" is not in IR

Natural language:	The multiplicity of "telecommunications" shall be 0
OCL:	inv: telecommunications → size()=0

Constraint: All utility network objects have inspireId

Natural language:	All utility network objects have an external object identifier.
OCL:	inv: inspireId → notEmpty()

5.7.2.1.13. UtilityNetworkElement

UtilityNetworkElement (abstract)

Name:	utility network element
Definition:	Abstract base type representing an utility network element in an utility network. Every element in an utility network provides some function that is of interest in the utility network.
Description:	NOTE Derived 'views' of real-world utility objects are represented through specialisations in other application schemas; all representations of the same real-world object share a common geographic name.
Stereotypes:	«featureType»

Attribute: currentStatus

Name:	current status
Value type:	ConditionOfFacilityValue
Definition:	The status of an utility object with regards to its completion and use.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: validFrom

Name:	valid from
Value type:	DateTime
Definition:	The time when the utility network element started to exist in the real world.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: validTo

Name:	valid to
Value type:	DateTime
Definition:	The time from which the utility network element no longer exists in the real world.
Multiplicity:	0..1
Stereotypes:	«voidable»

UtilityNetworkElement (abstract)**Attribute: verticalPosition**

Name:	vertical position
Value type:	VerticalPositionValue
Definition:	Vertical position of the utility object relative to ground.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: utilityFacilityReference

Name:	utility facility reference
Value type:	ActivityComplex
Definition:	Reference to a facility activity complex that is linked (related) to this utility network element.
Description:	This reference can be used to link a utility facility - having a more complex geometry - to a utility network element.
Multiplicity:	0..1
Stereotypes:	«voidable»

Attribute: governmentalServiceReference

Name:	governmental service reference
Value type:	GovernmentalService
Definition:	Reference to a governmental service object that is linked (related) to this utility network element.
Description:	This reference can be used to link a governmental service object to a utility network element.
Multiplicity:	0..1
Stereotypes:	«voidable»

5.7.2.1.14. UtilityNode

UtilityNode (abstract)

Name:	utility node
Subtype of:	NodeUtilityNetworkElement
Definition:	A point spatial object which is used for connectivity.
Description:	Nodes are found at both ends of the UtilityLink.
Stereotypes:	«featureType»

Constraint: All utility node objects have inspireId

Natural language:	All utility node objects have an external object identifier.
OCL:	inv:inspireId → notEmpty()

5.7.2.1.15. UtilityNodeContainer**UtilityNodeContainer (abstract)**

Name:	utility node container
Subtype of:	UtilityNetworkElement
Definition:	A point spatial object which is used for connectivity, and also may contain other spatial objects (not necessarily belonging to the same utility network).
Description:	Nodes are found at either end of the UtilityLink.
Stereotypes:	«featureType»

Attribute: geometry

Name:	geometry
Value type:	GM_Point
Definition:	Location of the utility node container.
Multiplicity:	1

Attribute: inspireId

Value type:	Identifier
Definition:	External object identifier of the spatial object.
Multiplicity:	0..1

UtilityNodeContainer (abstract)

Association role: nodes

Name:	nodes
Value type:	UtilityNode
Definition:	Contained utility nodes.
Multiplicity:	0..*
Stereotypes:	«voidable»

5.7.2.2. Code lists

5.7.2.2.1. *AppurtenanceTypeValue*

AppurtenanceTypeValue	
Name:	appurtenance type
Definition:	Classification of appurtenances.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/AppurtenanceTypeValue
Values:	

5.7.2.2.2. *SpecificAppurtenanceTypeValue*

SpecificAppurtenanceTypeValue	
Name:	specific appurtenance type
Definition:	Domain-specific classification of appurtenances.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/SpecificAppurtenanceTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers.

5.7.2.2.3. *UtilityDeliveryTypeValue*

UtilityDeliveryTypeValue

Name:	utility delivery type
Definition:	Classification of utility delivery types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/UtilityDeliveryTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

5.7.2.2.4. UtilityNetworkTypeValue

UtilityNetworkTypeValue

Name:	utility network type
Definition:	Classification of utility network types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/UtilityNetworkTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

5.7.2.2.5. WarningTypeValue

WarningTypeValue

Name:	warning type
Definition:	Classification of warning types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/WarningTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

5.7.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the

feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

5.7.2.3.1. *ActivityComplex*

ActivityComplex	
Package:	Activity Complex
Reference:	INSPIRE Data Specifications – Base Models – Activity Complex, version 1.0 [DS-D2.10.3]
Definition:	A "single unit", both technically and economically, under the management control of the same legal entity (operator), covering activities as those listed in the Eurostat NACE classification, products and services. Activity Complex includes all infrastructure, equipment and materials. It must represent the whole area, at the same or different geographical location, managed by a "single unit".
Description:	<p>NOTE 1 This class describes the minimal set of elements necessary to describe and identify geographically a legal entity and the activities taken place on it under the context of a Environmental purposes.</p> <p>NOTE 2 "Activity Complex" could be assimilated to terms described on the legislation as Facility, Establishment, Plant, Holding, Organization ,Farm, Extractive Industries or Aquaculture Production Business among others</p> <p>EXAMPLE i.e. an Agro-business that is legally registered under the Emissions Directive.</p>

5.7.2.3.2. *ConditionOfFacilityValue*

ConditionOfFacilityValue	
Package:	Base Types
Reference:	INSPIRE Generic Conceptual Model, version 3.4 [DS-D2.5]
Definition:	The status of a facility with regards to its completion and use.

5.7.2.3.3. *DateTime*

DateTime

Package:	Date and Time
Reference:	Geographic information — Conceptual schema language [ISO/TS 19103:2005]

5.7.2.3.4. ElectricityAppurtenanceTypeValue**ElectricityAppurtenanceTypeValue**

Package:	Electricity Network
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	Classification of electricity appurtenances.

5.7.2.3.5. GM_Point**GM_Point**

Package:	Geometric primitive
Reference:	Geographic information — Spatial schema [ISO 19107:2003]

5.7.2.3.6. GovernmentalService

GovernmentalService

Package:	ExtensionAdministrativeAndSocialGovernmentalServices
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	Administrative and social governmental services such as public administrations, civil protection sites, schools and hospitals provided by Public Administrative Bodies or by private institutions as far as they are covered by the scope of the INSPIRE directive. This scope is mapped to the values of the corresponding code list serviceType Value.
Description:	The accordant sites are commonly presented in governmental and municipal portals and map systems as "point of interest"-data, and may be point-based locations of a variety of categories of municipal and governmental services and social infrastructure. The spatial object type itself is generic in terms of the modelling approach, that the concrete type of a GovernmentalService is determined by the value of the attribute serviceType.

5.7.2.3.7. Identifier

Identifier	
Package:	Base Types
Reference:	INSPIRE Generic Conceptual Model, version 3.4 [DS-D2.5]
Definition:	External unique object identifier published by the responsible body, which may be used by external applications to reference the spatial object.
Description:	<p>NOTE1 External object identifiers are distinct from thematic object identifiers.</p> <p>NOTE 2 The voidable version identifier attribute is not part of the unique identifier of a spatial object and may be used to distinguish two versions of the same spatial object.</p> <p>NOTE 3 The unique identifier will not change during the life-time of a spatial object.</p>

5.7.2.3.8. *Length*

Length	
Package:	Units of Measure
Reference:	Geographic information — Conceptual schema language [ISO/TS 19103:2005]

5.7.2.3.9. *Link*

Link (abstract)	
Package:	Network
Reference:	INSPIRE Data Specifications – Base Models – Generic Network Model, version 1.0 [DS-D2.10.1]
Definition:	Curvilinear network element that connects two positions and represents a homogeneous path in the network. The connected positions may be represented as nodes.

5.7.2.3.10. *LinkSequence*

LinkSequence (abstract)

Package:	Network
Reference:	INSPIRE Data Specifications – Base Models – Generic Network Model, version 1.0 [DS-D2.10.1]
Definition:	A network element which represents a continuous path in the network without any branches. The element has a defined beginning and end and every position on the link sequence is identifiable with one single parameter such as length.
Description:	EXAMPLE A link sequence may represent a route.

5.7.2.3.11. LinkSet

LinkSet (abstract)

Package:	Network
Reference:	INSPIRE Data Specifications – Base Models – Generic Network Model, version 1.0 [DS-D2.10.1]
Definition:	A collection of link sequences and/or individual links that has a specific function or significance in a network.
Description:	<p>NOTE This spatial object type supports the aggregation of links to form objects with branches, loops, parallel sequences of links, gaps, etc.</p> <p>EXAMPLE A dual carriageway road, as a collection of the two link sequences that represent each carriageway.</p>

5.7.2.3.12. Measure

Measure

Package:	ProductionAndIndustrialFacilitiesExtension
Reference:	INSPIRE Data specification on Production and Industrial Facilities [DS-D2.8.III.8]
Definition:	Declared or measured quantity of any kind of physical entity.

5.7.2.3.13. *Network*

Network	
Package:	Assessment Methods
Reference:	INSPIRE Data specification on Area Management Restriction Regulation Zones and Reporting units [DS-D2.8.III.11]

5.7.2.3.14. *Node*

Node (abstract)	
Package:	Network
Reference:	INSPIRE Data Specifications – Base Models – Generic Network Model, version 1.0 [DS-D2.10.1]
Definition:	Represents a significant position in the network that always occurs at the beginning or the end of a link.
Description:	NOTE if a topological representation of the network is used the road node is either a topological connection between two or more links or the termination of a link. If a geometric representation of the network is used road nodes are represented by points or alternatively another geometric shape. [EuroRoadS]

5.7.2.3.15. *OilGasChemicalsAppurtenanceTypeValue*

OilGasChemicalsAppurtenanceTypeValue	
Package:	Oil-Gas-Chemicals Network
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	Classification of oil, gas, chemicals appurtenances.

5.7.2.3.16. *PT_FreeText*

PT_FreeText	
Package:	Cultural and linguistic adaptability
Reference:	Geographic information — Metadata — XML schema implementation [ISO/TS 19139:2007]

5.7.2.3.17. *RelatedParty*

RelatedParty	
Package:	Base Types 2
Reference:	INSPIRE Generic Conceptual Model, version 3.4 [DS-D2.5]
Definition:	An organisation or a person with a role related to a resource.
Description:	NOTE 1 A party, typically an individual person, acting as a general point of contact for a resource can be specified without providing any particular role.

5.7.2.3.18. *SewerAppurtenanceTypeValue*

SewerAppurtenanceTypeValue	
Package:	Sewer Network
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	Classification of sewer appurtenances.

5.7.2.3.19. *ThermalAppurtenanceTypeValue*

ThermalAppurtenanceTypeValue	
Package:	Thermal Network
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	Classification of thermal appurtenances.

5.7.2.3.20. *VerticalPositionValue*

VerticalPositionValue	
Package:	Base Types
Reference:	INSPIRE Generic Conceptual Model, version 3.4 [DS-D2.5]
Definition:	The relative vertical position of a spatial object.

5.7.2.3.21. *WaterAppurtenanceTypeValue*

WaterAppurtenanceTypeValue	
Package:	Water Network
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	Classification of water appurtenances.

5.7.3. Externally governed code lists

There are not externally governed code list in this application schema.

5.8. "Electricity Network" application schema

5.8.1. Description

5.8.1.1. Narrative Description

Electricity Network application schema is structured containing:

- One concrete link object extending from an abstract Cable or Pipe featureType (shown in red color);
- One Appurtenance node object (green color) ;
- One UtilityNetwork object (green color);
- All codelists used by the featureType properties of this diagram (grey color):
 - Those used by the abstract UtilityLinkSet featureType properties;
 - Those used by the concrete cable or pipe and appurtenance featureType properties of the specific utility network;
 - Those used by the "appurtenanceType" property of the Appurtenance object;
 - The "UtilityNetworkTypeValue" used by the "utilityNetworkType" property of the UtilityNetwork object..

5.8.1.2. UML Overview

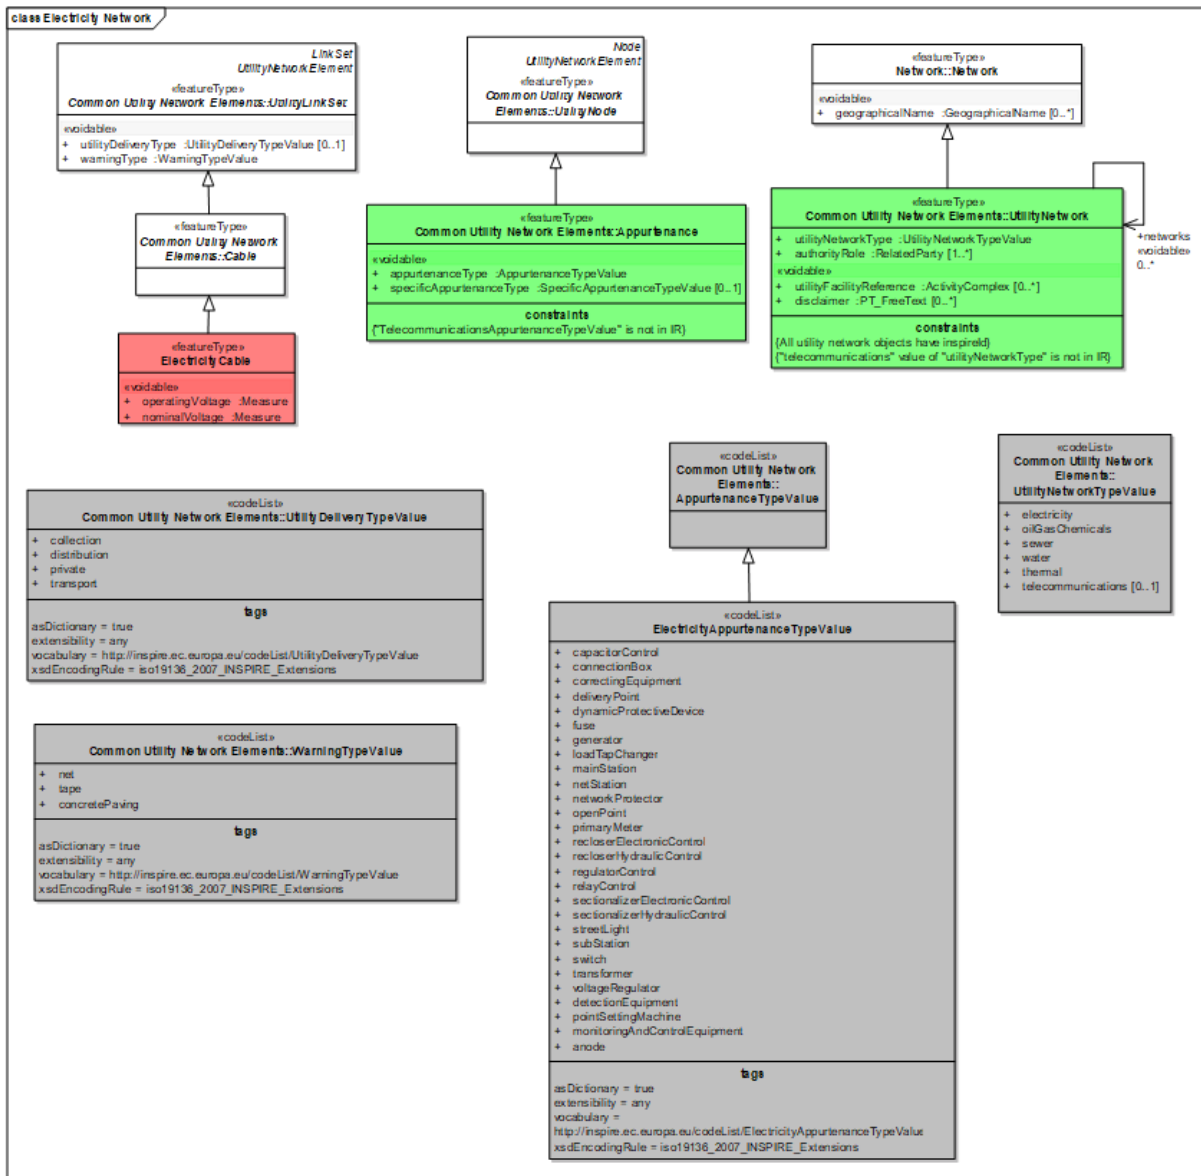


Figure 12 – UML class diagram: Overview of the "Electricity Networks"

5.8.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Electricity Network
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>ElectricityAppurtenanceTypeValue</i>	Electricity Network	«codeList»
<i>ElectricityCable</i>	Electricity Network	«featureType»

5.8.2.1. Spatial object types

5.8.2.1.1. *ElectricityCable*

ElectricityCable		
Name:	electricity cable	Subtype of:
Cable	Definition:	A utility link or link sequence used to convey electricity from one location to another.
Attribute: operatingVoltage		
Name:	operating voltage	
Value type:	Measure	
Definition:	The utilization or operating voltage by the equipment using the electricity.	
Multiplicity:	1	
Stereotypes:	«voidable»	
Attribute: nominalVoltage		
Name:	nominal voltage	
Value type:	Measure	
Definition:	The nominal system voltage at the point of supply.	
Multiplicity:	1	
Stereotypes:	«voidable»	

5.8.2.2. Code lists

5.8.2.2.1. *ElectricityAppurtenanceTypeValue*

ElectricityAppurtenanceTypeValue	
Name:	electricity appurtenance type
Definition:	Classification of electricity appurtenances.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/ElectricityAppurtenanceTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

5.8.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

5.8.2.3.1. Cable

Cable (abstract)	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A utility link or link sequence used to convey electricity or data from one location to another.

5.8.2.3.2. Measure

Measure	
Package:	ProductionAndIndustrialFacilitiesExtension
Reference:	INSPIRE Data specification on Production and Industrial Facilities [DS-D2.8.III.8]
Definition:	Declared or measured quantity of any kind of physical entity.

5.8.3. Externally governed code lists

There are not externally governed code list in this application schema.

5.9. "Oil-Gas-Chemicals Network" application schema

5.9.1. Description

5.9.1.1. Narrative Description

Oil-Gas-Chemicals Network application schema is structured containing:

- One concrete link object extending from an abstract Cable or Pipe featureType (shown in red color);
- One Appurtenance node object (green color) ;
- One UtilityNetwork object (green color);
- All codelists used by the featureType properties of this diagram (grey color):
 - Those used by the abstract UtilityLinkSet featureType properties;

- Those used by the concrete cable or pipe and appurtenance featureType properties of the specific utility network;
- Those used by the "appurtenanceType" property of the Appurtenance object;
- The "UtilityNetworkTypeValue" used by the "utilityNetworkType" property of the UtilityNetwork object..

5.9.1.2. UML Overview

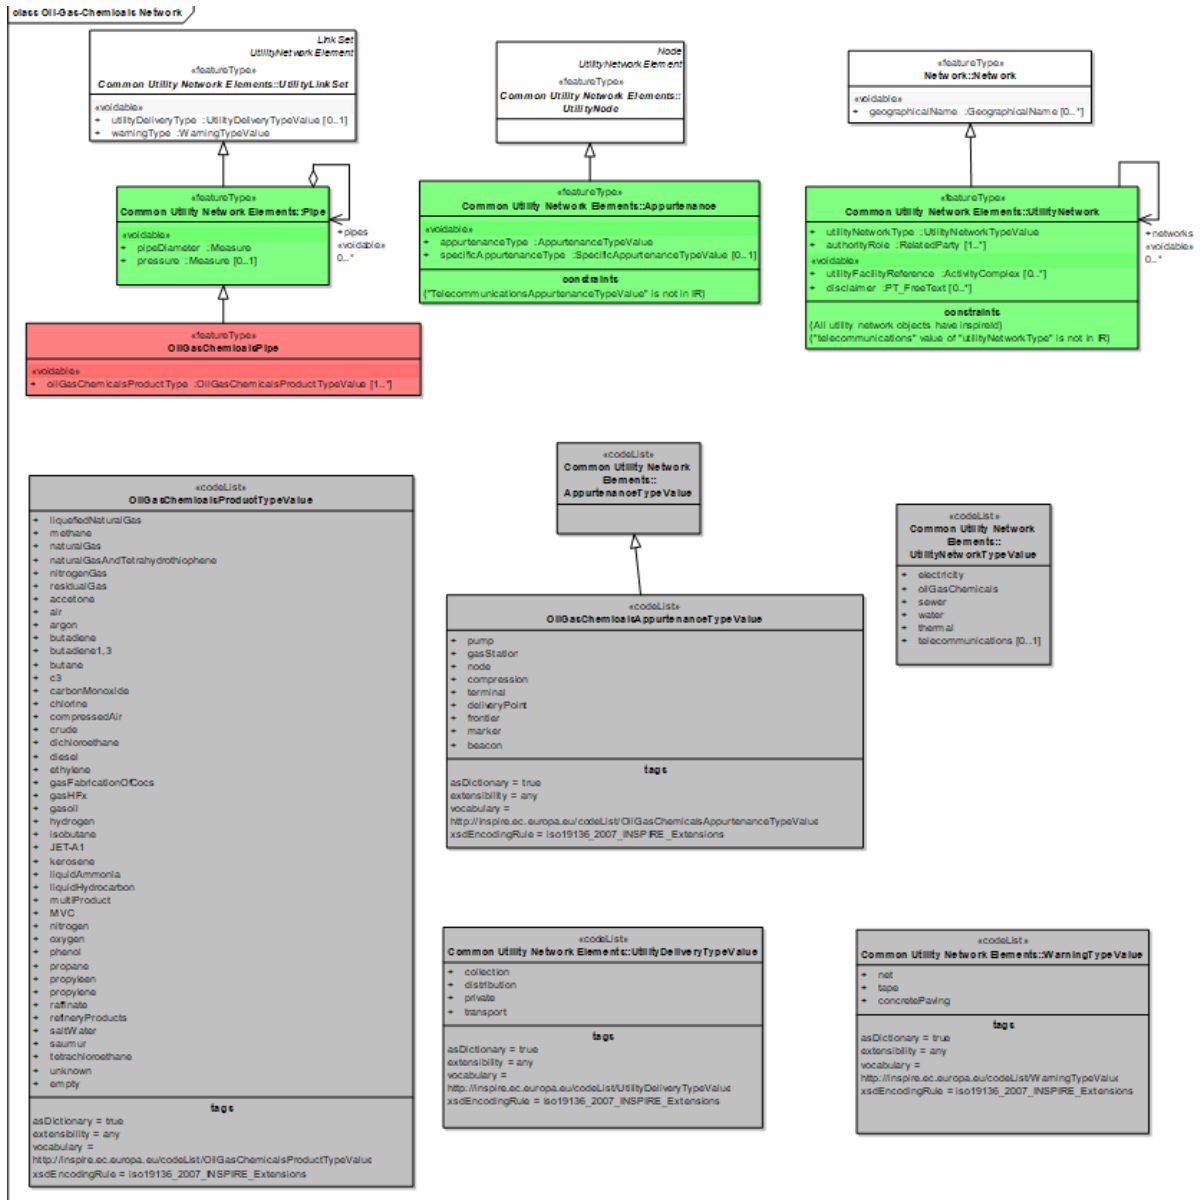


Figure 13 – UML class diagram: Overview of the "Oil-Gas-Chemicals Networks

5.9.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Oil-Gas-Chemicals Network
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>OilGasChemicalsAppurtenanceTypeValue</i>	Oil-Gas-Chemicals Network	«codelist»
<i>OilGasChemicalsPipe</i>	Oil-Gas-Chemicals Network	«featureType»
<i>OilGasChemicalsProductTypeValue</i>	Oil-Gas-Chemicals Network	«codelist»

5.9.2.1. Spatial object types

5.9.2.1.1. *OilGasChemicalsPipe*

OilGasChemicalsPipe	
Name:	oil, gas and chemicals pipe
Subtype of:	Pipe
Definition:	A pipe used to convey oil, gas or chemicals from one location to another.
Stereotypes:	«featureType»
Attribute: oilGasChemicalsProductType	
Name:	oil, gas and chemicals product type
Value type:	OilGasChemicalsProductTypeValue
Definition:	The type of oil, gas or chemicals product that is conveyed through the oil, gas, chemicals pipe.
Multiplicity:	1..*
Stereotypes:	«voidable»

5.9.2.2. Code lists

5.9.2.2.1. *OilGasChemicalsAppurtenanceTypeValue*

OilGasChemicalsAppurtenanceTypeValue

Name:	oil, gas and chemicals appurtenance type
Definition:	Classification of oil, gas, chemicals appurtenances.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/OilGasChemicalsAppurtenanceTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

5.9.2.2.2. OilGasChemicalsProductTypeValue

OilGasChemicalsProductTypeValue	
Name:	oil, gas and chemicals product type
Definition:	Classification of oil, gas and chemicals products.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/OilGasChemicalsProductTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

5.9.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

5.9.2.3.1. Pipe

Pipe	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A utility link or link sequence for the conveyance of solids, liquids, chemicals or gases from one location to another. A pipe can also be used as an object to encase several cables (a bundle of cables) or other (smaller) pipes.

5.9.3. Externally governed code lists

There are not externally governed code list in this application schema.

5.10. "Sewer Network" application schema

5.10.1. Description

5.10.1.1. Narrative Description

Sewer Network application schema is structured containing:

- One concrete link object extending from an abstract Cable or Pipe featureType (shown in red color);
- One Appurtenance node object (green color) ;
- One UtilityNetwork object (green color);
- All codelists used by the featureType properties of this diagram (grey color):
 - Those used by the abstract UtilityLinkSet featureType properties;
 - Those used by the concrete cable or pipe and appurtenance featureType properties of the specific utility network;
 - Those used by the "appurtenanceType" property of the Appurtenance object;
 - The "UtilityNetworkTypeValue" used by the "utilityNetworkType" property of the UtilityNetwork object..

5.10.1.2. UML Overview

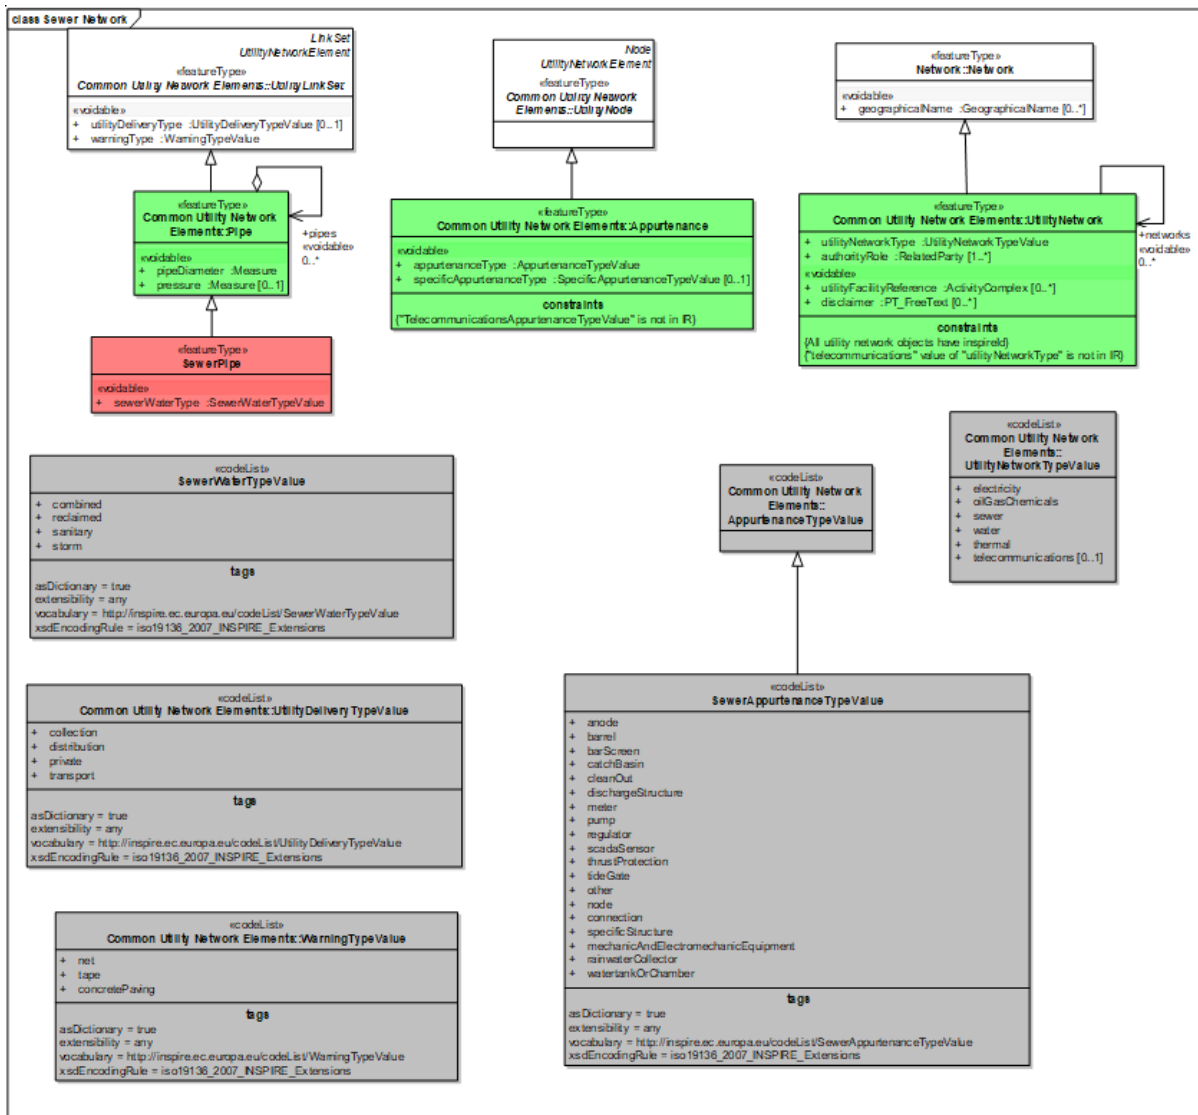


Figure 14 – UML class diagram: Overview of the "Sewer Networks"

5.10.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Sewer Network
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>SewerAppurtenanceTypeValue</i>	Sewer Network	«codeList»
<i>SewerPipe</i>	Sewer Network	«featureType»
<i>SewerWaterTypeValue</i>	Sewer Network	«codeList»

5.10.2.1. Spatial object types

5.10.2.1.1. SewerPipe

SewerPipe	
Name:	sewer pipe
Subtype of:	Pipe
Definition:	A sewer pipe used to convey wastewater (sewer) from one location to another.
Stereotypes:	«featureType»
Attribute: sewerWaterType	
Name:	sewer water type
Value type:	SewerWaterTypeValue
Definition:	Type of sewer water.
Multiplicity:	1
Stereotypes:	«voidable»

5.10.2.2. Code lists

5.10.2.2.1. SewerAppurtenanceTypeValue

SewerAppurtenanceTypeValue	
Name:	sewer appurtenance type
Definition:	Classification of sewer appurtenances.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/SewerAppurtenanceTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

5.10.2.2.2. SewerWaterTypeValue

SewerWaterTypeValue	
Name:	sewer water type
Definition:	Classification of sewer water types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/SewerWaterTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

5.10.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

5.10.2.3.1. *Pipe*

Pipe	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A utility link or link sequence for the conveyance of solids, liquids, chemicals or gases from one location to another. A pipe can also be used as an object to encase several cables (a bundle of cables) or other (smaller) pipes.

5.10.3. Externally governed code lists

There are not externally governed code list in this application schema.

5.11. "Thermal Network" application schema

5.11.1. Description

5.11.1.1. Narrative Description

Thermal Network application schema is structured containing:

- One concrete link object extending from an abstract Cable or Pipe featureType (shown in red color);

- One Appurtenance node object (green color) ;
- One UtilityNetwork object (green color);
- All codelists used by the featureType properties of this diagram (grey color):
 - Those used by the abstract UtilityLinkSet featureType properties;
 - Those used by the concrete cable or pipe and appurtenance featureType properties of the specific utility network;
 - Those used by the "appurtenanceType" property of the Appurtenance object;
 - The "UtilityNetworkTypeValue" used by the "utilityNetworkType" property of the UtilityNetwork object..

5.11.1.2. UML Overview

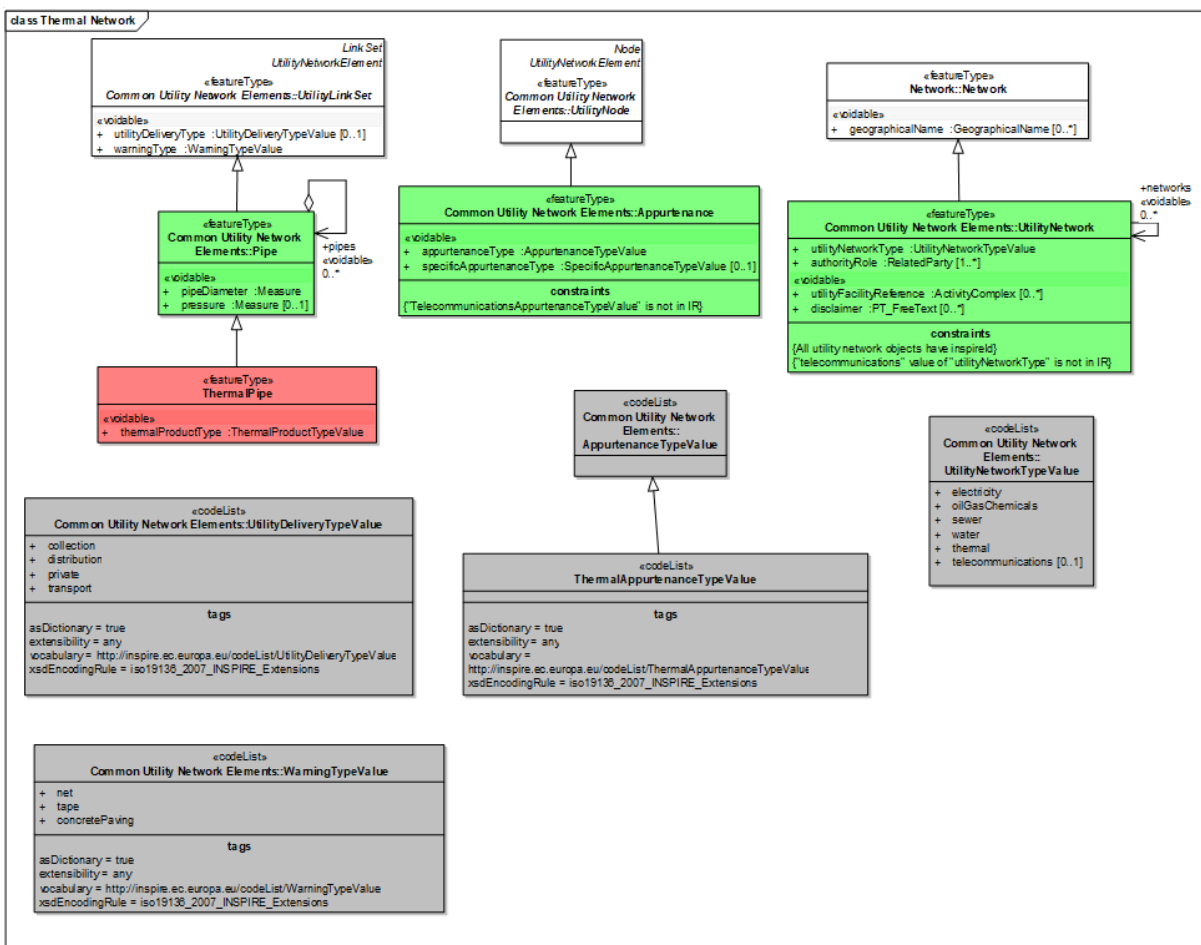


Figure 15 – UML class diagram: Overview of the "Thermal Networks"

5.11.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Thermal Network
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>ThermalAppurtenanceTypeValue</i>	Thermal Network	«codeList»
<i>ThermalPipe</i>	Thermal Network	«featureType»

5.11.2.1. Spatial object types

5.11.2.1.1. *ThermalPipe*

ThermalPipe	
Name:	thermal pipe
Subtype of:	Pipe
Definition:	A pipe used to disseminate heating or cooling from one location to another.
Stereotypes:	«featureType»
Attribute: thermalProductType	
Name:	thermal product type
Value type:	ThermalProductTypeValue
Definition:	The type of thermal product that is conveyed through the thermal pipe.
Multiplicity:	1
Stereotypes:	«voidable»

5.11.2.2. Code lists

5.11.2.2.1. *ThermalAppurtenanceTypeValue*

ThermalAppurtenanceTypeValue	
Name:	thermal appurtenance type
Definition:	Classification of thermal appurtenances.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/ThermalAppurtenanceTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers.

5.11.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these

types, see the given references.

5.11.2.3.1. *Pipe*

Pipe	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A utility link or link sequence for the conveyance of solids, liquids, chemicals or gases from one location to another. A pipe can also be used as an object to encase several cables (a bundle of cables) or other (smaller) pipes.

5.11.2.3.2. *ThermalProductTypeValue*

ThermalProductTypeValue		

5.11.3. Externally governed code lists

There are not externally governed code list in this application schema.

5.12. "Water Network" application schema

5.12.1. Description

5.12.1.1. Narrative Description

Water Network application schema is structured containing:

- One concrete link object extending from an abstract Cable or Pipe featureType (shown in red color);
- One Appurtenance node object (green color) ;
- One UtilityNetwork object (green color);
- All codelists used by the featureType properties of this diagram (grey color):
 - Those used by the abstract UtilityLinkSet featureType properties;
 - Those used by the concrete cable or pipe and appurtenance featureType properties of the specific utility network;
 - Those used by the "appurtenanceType" property of the Appurtenance object;
 - The "UtilityNetworkTypeValue" used by the "utilityNetworkType" property of the UtilityNetwork object..

5.12.1.2. UML Overview

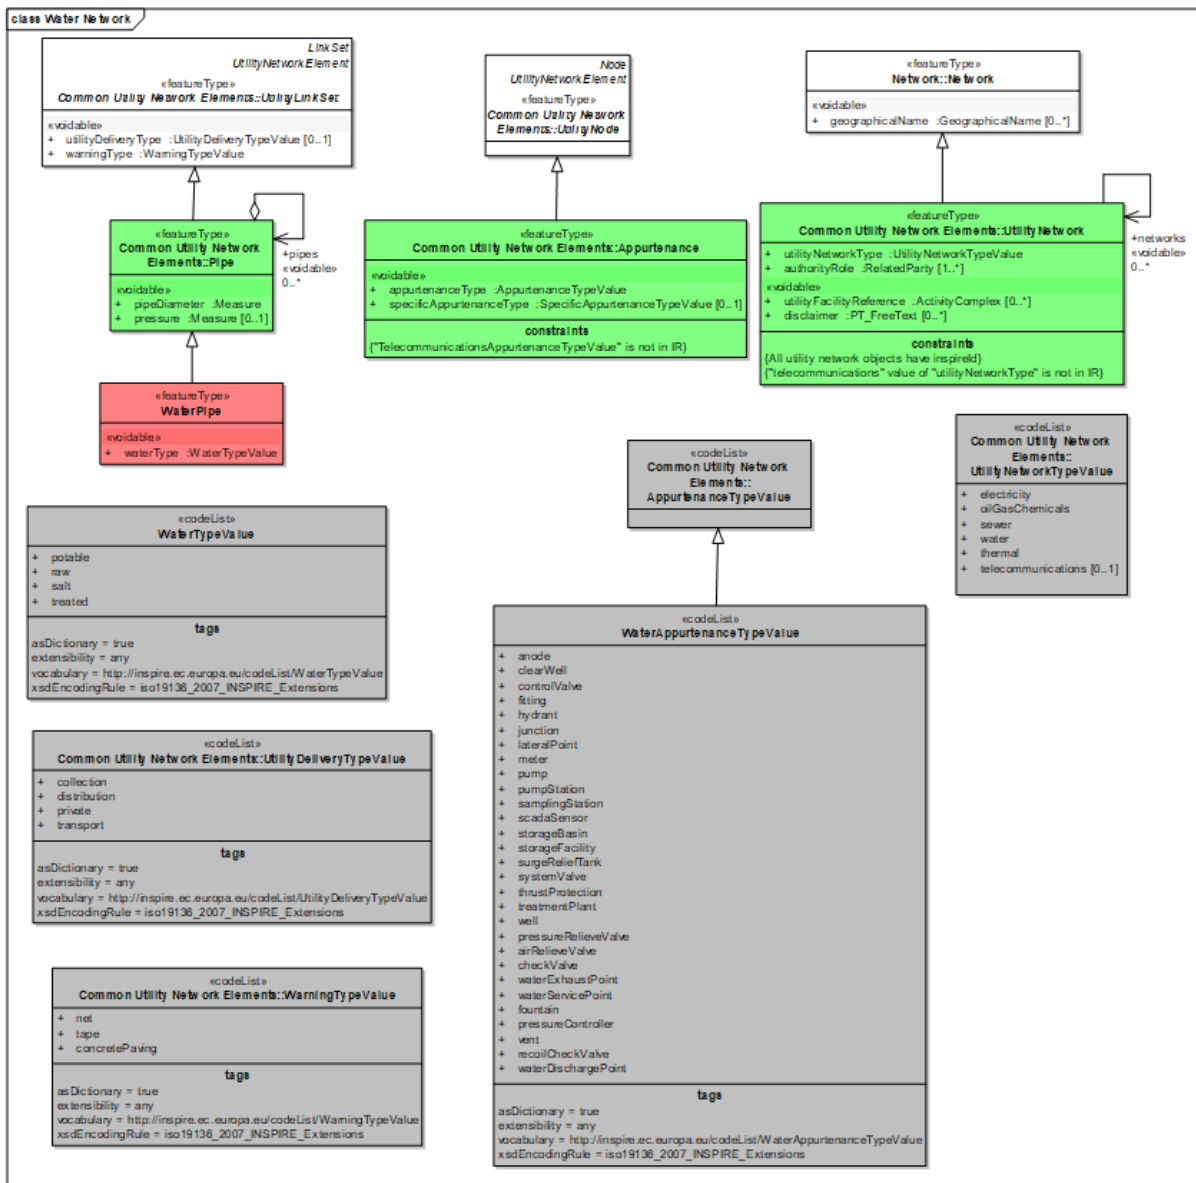


Figure 16 – UML class diagram: Overview of the "Water Networks"

5.12.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Water Network
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>WaterAppurtenanceTypeValue</i>	Water Network	«codeList»
<i>WaterPipe</i>	Water Network	«featureType»
<i>WaterTypeValue</i>	Water Network	«codeList»

5.12.2.1. Spatial object types

5.12.2.1.1. *WaterPipe*

WaterPipe	
Name:	water pipe
Subtype of:	Pipe
Definition:	A water pipe used to convey water from one location to another.
Stereotypes:	«featureType»
Attribute: waterType	
Name:	water type
Value type:	WaterTypeValue
Definition:	Type of water.
Multiplicity:	1
Stereotypes:	«voidable»

5.12.2.2. Code lists

5.12.2.2.1. *WaterAppurtenanceTypeValue*

WaterAppurtenanceTypeValue	
Name:	water appurtenance type
Definition:	Classification of water appurtenances.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/WaterAppurtenanceTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

5.12.2.2.2. *WaterTypeValue*

WaterTypeValue	
Name:	water type
Definition:	Classification of water types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/WaterTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

5.12.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

5.12.2.3.1. *Pipe*

Pipe	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A utility link or link sequence for the conveyance of solids, liquids, chemicals or gases from one location to another. A pipe can also be used as an object to encase several cables (a bundle of cables) or other (smaller) pipes.

5.12.3. Externally governed code lists

There are not externally governed code list in this application schema.

6. Reference systems, units of measure and grids

6.1. Default reference systems, units of measure and grid

The reference systems, units of measure and geographic grid systems included in this sub-section are the defaults to be used for all INSPIRE data sets, unless theme-specific exceptions and/or additional requirements are defined in section 6.2.

6.1.1. Coordinate reference systems

6.1.1.1. Datum

IR Requirement

Annex II, Section 1.2

Datum for three-dimensional and two-dimensional coordinate reference systems



For the three-dimensional and two-dimensional coordinate reference systems and the horizontal component of compound coordinate reference systems used for making spatial data sets available, the datum shall be the datum of the European Terrestrial Reference System 1989 (ETRS89) in areas within its geographical scope, or the datum of the International Terrestrial Reference System (ITRS) or other geodetic coordinate reference systems compliant with ITRS in areas that are outside the geographical scope of ETRS89. Compliant with the ITRS means that the system definition is based on the definition of the ITRS and there is a well documented relationship between both systems, according to EN ISO 19111.

6.1.1.2. Coordinate reference systems

IR Requirement

Annex II, Section 1.3

Coordinate Reference Systems



Spatial data sets shall be made available using at least one of the coordinate reference systems specified in sections 1.3.1, 1.3.2 and 1.3.3, unless one of the conditions specified in section 1.3.4 holds.

1.3.1. Three-dimensional Coordinate Reference Systems

- Three-dimensional Cartesian coordinates based on a datum specified in 1.2 and using the parameters of the Geodetic Reference System 1980 (GRS80) ellipsoid.
- Three-dimensional geodetic coordinates (latitude, longitude and ellipsoidal height) based on a datum specified in 1.2 and using the parameters of the

GRS80 ellipsoid.

1.3.2. Two-dimensional Coordinate Reference Systems

- Two-dimensional geodetic coordinates (latitude and longitude) based on a datum specified in 1.2 and using the parameters of the GRS80 ellipsoid.
- Plane coordinates using the ETRS89 Lambert Azimuthal Equal Area coordinate reference system.
- Plane coordinates using the ETRS89 Lambert Conformal Conic coordinate reference system.
- Plane coordinates using the ETRS89 Transverse Mercator coordinate reference system.

1.3.3. Compound Coordinate Reference Systems

1. For the horizontal component of the compound coordinate reference system, one of the coordinate reference systems specified in section 1.3.2 shall be used.
2. For the vertical component, one of the following coordinate reference systems shall be used:
 - For the vertical component on land, the European Vertical Reference System (EVRS) shall be used to express gravity-related heights within its geographical scope. Other vertical reference systems related to the Earth gravity field shall be used to express gravity-related heights in areas that are outside the geographical scope of EVRS.
 - For the vertical component in the free atmosphere, barometric pressure, converted to height using ISO 2533:1975 International Standard Atmosphere, or other linear or parametric reference systems shall be used. Where other parametric reference systems are used, these shall be described in an accessible reference using EN ISO 19111-2:2012.
 - For the vertical component in marine areas where there is an appreciable tidal range (tidal waters), the Lowest Astronomical Tide (LAT) shall be used as the reference surface.
 - For the vertical component in marine areas without an appreciable tidal range, in open oceans and effectively in waters that are deeper than 200 meters, the Mean Sea Level (MSL) or a well-defined reference level close to the MSL shall be used as the reference surface.

1.3.4. Other Coordinate Reference Systems

Exceptions, where other coordinate reference systems than those listed in 1.3.1, 1.3.2 or 1.3.3 may be used, are:

1. Other coordinate reference systems may be specified for specific spatial data themes.
2. For regions outside of continental Europe, Member States may define suitable

coordinate reference systems.

The geodetic codes and parameters needed to describe these other coordinate reference systems and to allow conversion and transformation operations shall be documented and an identifier shall be created in a coordinate systems register established and operated by the Commission, according to EN ISO 19111 and ISO 19127.

The Commission shall be assisted by the INSPIRE Commission expert group in the maintenance and update of the coordinate systems register.

6.1.1.3. Display

IR Requirement

Annex II, Section 1.5

Coordinate Reference Systems used in the View Network Service



For the display of spatial data sets with the view network service as specified in Regulation No 976/2009, at least the coordinate reference systems for two-dimensional geodetic coordinates (latitude, longitude) shall be available.

6.1.1.4. Identifiers for coordinate reference systems

IR Requirement

Annex II, Section 1.5

Coordinate Reference System Identifiers



1. Coordinate reference system parameters and identifiers shall be managed in one or several common registers for coordinate reference systems.
2. Only identifiers contained in a common register shall be used for referring to the coordinate reference systems listed in this Section.

These Technical Guidelines propose to use the http URIs provided by the Open Geospatial Consortium as coordinate reference system identifiers (see identifiers for the default CRSs in the INSPIRE coordinate reference systems register). These are based on and redirect to the definition in the EPSG Geodetic Parameter Registry (<http://www.epsg-registry.org/>).

TG Requirement 2



The identifiers listed in the INSPIRE coordinate reference systems register (<https://inspire.ec.europa.eu/crs>) shall be used for referring to the coordinate reference systems used in a data set.

NOTE CRS identifiers may be used e.g. in:

- data encoding,
- data set and service metadata, and
- requests to INSPIRE network services.

6.1.2. Temporal reference system

IR Requirement

Article 11

Temporal Reference Systems



1. The default temporal reference system referred to in point 5 of part B of the Annex to Commission Regulation (EC) No 1205/2008 (^[21]) shall be used, unless other temporal reference systems are specified for a specific spatial data theme in Annex II.

NOTE 1 Point 5 of part B of the Annex to Commission Regulation (EC) No 1205/2008 (the INSPIRE Metadata IRs) states that the default reference system shall be the Gregorian calendar, with dates expressed in accordance with ISO 8601.

NOTE 2 ISO 8601 *Data elements and interchange formats – Information interchange – Representation of dates and times* is an international standard covering the exchange of date and time-related data. The purpose of this standard is to provide an unambiguous and well-defined method of representing dates and times, so as to avoid misinterpretation of numeric representations of dates and times, particularly when data is transferred between countries with different conventions for writing numeric dates and times. The standard organizes the data so the largest temporal term (the year) appears first in the data string and progresses to the smallest term (the second). It also provides for a standardized method of communicating time-based information across time zones by attaching an offset to Coordinated Universal Time (UTC).

EXAMPLE 1997 (the year 1997), 1997-07-16 (16th July 1997), 1997-07-16T19:20:3001:00 (16th July 1997, 19h 20' 30", time zone: UTC1)

6.1.3. Units of measure

IR Requirement

Article 12

Other Requirements & Rules



(...)

2. All measurement values shall be expressed using SI units or non-SI units accepted for use with the International System of Units, unless specified otherwise for a specific spatial data theme or type.

6.2. Theme-specific requirements and recommendations

There are no theme-specific requirements or recommendations on reference systems and grids.

7. Data quality

This chapter includes a description of the data quality elements and sub-elements as well as the corresponding data quality measures that should be used to evaluate and document data quality for data sets related to the spatial data theme *Utility and Government Services* (section 7.1).

It may also define requirements or recommendations about the targeted data quality results applicable for data sets related to the spatial data theme *Utility and Government Services* (sections 7.2 and 7.3).

In particular, the data quality elements, sub-elements and measures specified in section 7.1 should be used for

- evaluating and documenting data quality properties and constraints of spatial objects, where such properties or constraints are defined as part of the application schema(s) (see section 5);
- evaluating and documenting data quality metadata elements of spatial data sets (see section 8); and/or
- specifying requirements or recommendations about the targeted data quality results applicable for data sets related to the spatial data theme *Utility and Government Services* (see sections 7.2 and 7.3).

The descriptions of the elements and measures are based on Annex D of ISO/DIS 19157 Geographic information – Data quality.

7.1. Data quality elements

Table 3 lists all data quality elements and sub-elements that are being used in this specification. Data quality information can be evaluated at level of spatial object, spatial object type, dataset or dataset series. The level at which the evaluation is performed is given in the "Evaluation Scope" column.

The measures to be used for each of the listed data quality sub-elements are defined in the following sub-sections.

Table 3 – Data quality elements used in the spatial data theme *Utility and Government Services*

Section	Data quality element	Data quality sub-element	Definition	Evaluation Scope
7.1.1	Completeness	Commission	excess data present in the dataset, as described by the scope	dataset series; dataset; spatial object type

7.1.2	Completeness	Omission	data absent from the dataset, as described by the scope	dataset series; dataset; spatial object type
7.1.3	Logical consistency	Conceptual consistency	adherence to rules of the conceptual schema	dataset
7.1.4	Logical consistency	Domain consistency	adherence of values to the value domains	dataset
7.1.5	Logical consistency	Format consistency	degree to which data is stored in accordance with the physical structure of the dataset, as described by the scope	dataset
7.1.6	Logical consistency	Topological consistency	correctness of the explicitly encoded topological characteristics of the dataset, as described by the scope	spatial object
7.1.7	Positional accuracy	Absolute or external accuracy	closeness of reported coordinate values to values accepted as or being true	spatial object
7.1.8	Positional accuracy	Relative or internal accuracy	closeness of the relative positions of features in the scope to their respective relative positions accepted as or being true	spatial object
7.1.9	Thematic accuracy	Classification correctness	comparison of the classes assigned to features or their attributes to a universe of discourse	spatial object

7.1.10	Thematic accuracy	Non-quantitative attribute correctness	correctness of non-quantitative attributes	spatial object
7.1.11	Thematic accuracy	Quantitative attribute accuracy	accuracy of quantitative attributes	spatial object
7.1.12	Temporal quality	Accuracy of a time measurement	correctness of the temporal references of an item (reporting of error in time measurement)	spatial object
7.1.13	Temporal quality	Temporal consistency	correctness of ordered events or sequences, if reported	spatial object

Recommendation 12



Where it is impossible to express the evaluation of a data quality element in a quantitative way, the evaluation of the element should be expressed with a textual statement as a data quality descriptive result.

7.1.1. Completeness – Commission



Recommendation 13

Commission should be evaluated and documented using Rate of excess items as specified in the tables below.

Name	Rate of excess items
Alternative name	–
Data quality element	Completeness
Data quality sub-element	Commission
Data quality basic measure	Error rate
Definition	Number of excess items in the dataset in relation to the number of items that should have been present
Description	No specific description for version 2.9
Evaluation scope	spatial object type: all spatial object types dataset dataset series

Reporting scope	spatial object type: all spatial object types dataset dataset series
Parameter	–
Data quality value type	Real ; percentage ; ratio
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	0.0189 ; 98.11% ; 11:582
Measure identifier	3 (ISO 19157)

7.1.2. Completeness – Omission



Recommendation 14

Omission should be evaluated and documented using Rate of missing items as specified in the tables below.

Name	Rate of missing items
Alternative name	–
Data quality element	Completeness
Data quality sub-element	Omission
Data quality basic measure	Error rate
Definition	Number of missing items in the dataset in relation to the number of items that should have been present
Description	No specific description for version 2.9
Evaluation scope	spatial object type: all spatial object types dataset dataset series
Reporting scope	spatial object type: all spatial object types dataset dataset series
Parameter	–
Data quality value type	Real ; percentage ; ratio
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality

Example	0.0189 ; 98.11% ; 11:582
Measure identifier	7 (ISO 19157)

7.1.3. Logical consistency – Conceptual consistency

The Application Schema conformance class of the Abstract Test Suite in Annex I defines a number of tests to evaluate the conceptual consistency (tests A.1.1, A.1.2 and A.1.4-A.1.7) of a data set.

Recommendation 15



For the tests on conceptual consistency, it is recommended to use the *Logical consistency – Conceptual consistency* data quality sub-element and the measure *Number of items not compliant with the rules of the conceptual schema* as specified in the table below.

Name	
Alternative name	-
Data quality element	logical consistency
Data quality sub-element	conceptual consistency
Data quality basic measure	error count
Definition	count of all items in the dataset that are not compliant with the rules of the conceptual schema
Description	If the conceptual schema explicitly or implicitly describes rules, these rules shall be followed. Violations against such rules can be, for example, invalid placement of features within a defined tolerance, duplication of features and invalid overlap of features.
Evaluation scope	spatial object / spatial object type
Reporting scope	data set
Parameter	-
Data quality value type	integer
Data quality value structure	-
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	
Measure identifier	10

7.1.4. Logical consistency – Domain consistency

The Application Schema conformance class of the Abstract Test Suite in Annex I defines a number of tests to evaluate the domain consistency (test A.1.3) of a data set.

Recommendation 16



For the tests on domain consistency, it is recommended to use the *Logical consistency – Domain consistency* data quality sub-element and the measure *Number of items not in conformance with their value domain* as specified in the table below.

Name	Number of items not in conformance with their value domain
Alternative name	-
Data quality element	logical consistency
Data quality sub-element	domain consistency
Data quality basic measure	error count
Definition	count of all items in the dataset that are not in conformance with their value domain
Description	
Evaluation scope	spatial object / spatial object type
Reporting scope	data set
Parameter	-
Data quality value type	integer

7.1.5. Logical Consistency – Format consistency

Recommendation 17



Format consistency should be evaluated and documented using Physical structure conflict rate as specified in the tables below.

Name	Physical structure conflict rate
Alternative name	–
Data quality element	Logical consistency
Data quality sub-element	Format consistency
Data quality basic measure	Error rate
Definition	Number of items in the dataset that are stored in conflict with the physical structure of the dataset divided by the total number of items

Description	No specific description for version 2.9
Evaluation scope	dataset
Reporting scope	dataset
Parameter	–
Data quality value type	Real ; percentage ; ratio
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	0.0189 ; 98.11% ; 11:582
Measure identifier	20 (ISO 19157)

7.1.6. Logical Consistency – Topological consistency

The following topological consistency quality sub-elements are required in order to ensure building a "clean" and connected utility network while working with the Utility Networks Profile (or Extended Utility Networks).


Recommendation 18



Topological consistency should be evaluated and documented using Number of missing connections due to undershoots, Number of missing connections due to overshoots, Number of invalid self-overlap errors as specified in the tables below.


Name	Number of missing connections due to undershoots
Alternative name	Undershoots
Data quality element	Logical consistency
Data quality sub-element	Topological consistency
Data quality basic measure	Error count
Definition	Count of items in the dataset that are mismatched due to undershoots, given the parameter <i>Connectivity tolerance</i>
Description	Lacks of connectivity exceeding the <i>Connectivity tolerance</i> are considered as errors if the real features are connected in the utility network
Evaluation scope	dataset
Reporting scope	dataset

Parameter	<p>Name: <i>Connectivity tolerance</i></p> <p>Definition: Search distance from the end of a dangling line.</p> <p>Description:</p> <p>This parameter is specific for each data provider's dataset and must be reported as metadata in order to ensure automatic and unambiguous creation of centreline topology – connectivity - for the utility network.</p> <p>Connectivity tolerance must be specified by the data provider using the following elements of the DQ_TopologicalConsistency metadata element for the current measure:</p> <p>102. measureDescription (type: free text):</p> <p>Defined as "<i>Description of the measure</i>".</p> <p>107. Result (type DQ_Result):</p> <p>Defined as "<i>Value (or set of values) obtained from applying a data quality measure or the outcome of evaluating the obtained value (or set of values) against a specified acceptable conformance quality level</i>".</p> <p>Specifically, the tolerance must be defined within the two elements:</p> <p>130. specification</p> <p>131. Explanation from DQ_Result class.</p> <p>Note: Metadata elements defined in ISO 19115</p>
Data quality value type	Integer
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality

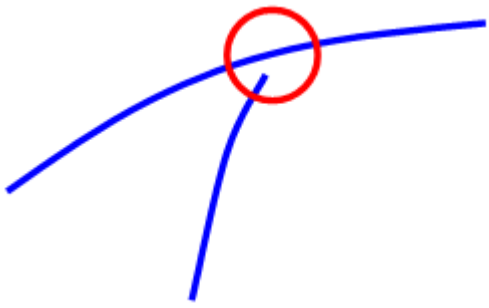
Example	 <p>Key</p> <p>1 Connectivity tolerance = 1:10 000 of the resolution of the dataset (cf. Metadata elements defined in ISO 19115)</p>
Measure identifier	23 (ISO 19157)

Name	Number of missing connections due to overshoots
Alternative name	Overshoots
Data quality element	Logical consistency
Data quality sub-element	Topological consistency
Data quality basic measure	Error count
Definition	Count of items in the dataset that are mismatched due to overshoots, given the parameter <i>Connectivity tolerance</i>
Description	Lacks of connectivity exceeding the <i>Connectivity tolerance</i> are considered as errors if the real features are connected in the utility network
Evaluation scope	dataset
Reporting scope	dataset

Parameter	<p>Name: <i>Connectivity tolerance</i></p> <p>Definition: Search distance from the end of a dangling line.</p> <p>Description:</p> <p>This parameter is specific for each data provider's dataset and must be reported as metadata in order to ensure automatic and unambiguous creation of centreline topology – connectivity - for the utility network.</p> <p>Connectivity tolerance must be specified by the data provider using the following elements of the DQ_TopologicalConsistency metadata element for the current measure:</p> <p>102. measureDescription (type: free text):</p> <p>Defined as "<i>Description of the measure</i>".</p> <p>107. Result (type DQ_Result):</p> <p>Defined as "<i>Value (or set of values) obtained from applying a data quality measure or the outcome of evaluating the obtained value (or set of values) against a specified acceptable conformance quality level</i>".</p> <p>Specifically, the tolerance must be defined within the two elements:</p> <p>130. specification</p> <p>131. Explanation from DQ_Result class.</p> <p>Note: Metadata elements defined in ISO 19115</p>
Data quality value type	Integer
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality

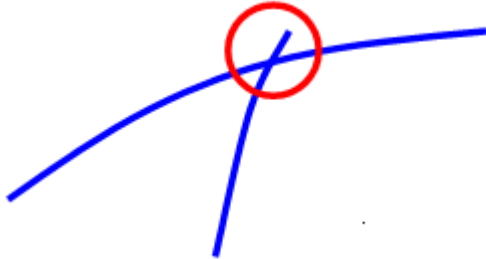Example	 <p>Key</p> <p>1 Connectivity tolerance = 1:10 000 of the resolution of the dataset (cf. Metadata elements defined in ISO 19115)</p>
Measure identifier	24 (ISO 19157)

Name	Number of invalid self-overlap errors
Alternative name	Kickbacks
Data quality element	Logical consistency
Data quality sub-element	Topological consistency
Data quality basic measure	Error count
Definition	Count of all items in the data that illegally self overlap
Description	No specific description for version 2.9
Evaluation scope	dataset
Reporting scope	dataset
Parameter	–
Data quality value type	Integer
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality

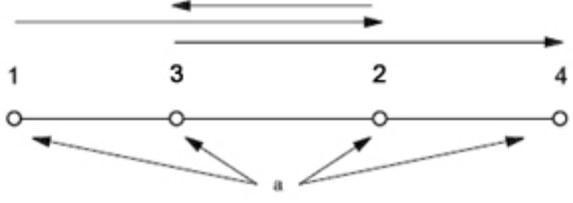Example	 <p>Key</p> <p>^a vertices</p>
Measure identifier	27 (ISO 19157)

7.1.7. Positional accuracy – Absolute or external accuracy



Recommendation 19

Absolute or external accuracy should be evaluated and documented using Mean value of positional uncertainties, Rate of positional errors above a given threshold as specified in the tables below.

The "mean value of positional uncertainties" sub-element shows the closeness of reported coordinate values to values accepted as or being true. **It is used for the features of the Utility networks sub-theme only.**

Name	Mean value of positional uncertainties
Alternative name	Mean value of positional uncertainties (1D, 2D and 3D)
Data quality element	Positional accuracy
Data quality sub-element	Absolute or external accuracy
Data quality basic measure	Not applicable
Definition	Mean value of the positional uncertainties for a set of positions where the positional uncertainties are defined as the distance between a measured position and what is considered as the corresponding true position

Description	<p>For a number of points (N), the measured positions are given as x_{mi}, y_{mi} and z_{mi} coordinates depending on the dimension in which the position of the point is measured. A corresponding set of coordinates, x_{ti}, y_{ti} and z_{ti}, are considered to represent the true positions. The errors are calculated as</p> <p>1D: $e_i = x_{mi} - x_{ti}$ 2D: $e_i = \sqrt{[(x_{mi} - x_{ti})^2 + (y_{mi} - y_{ti})^2]}$ 3D: $e_i = \sqrt{[(x_{mi} - x_{ti})^2 + (y_{mi} - y_{ti})^2 + (z_{mi} - z_{ti})^2]}$</p> <p>The mean positional uncertainties of the horizontal absolute or external positions are then calculated as</p> $\bar{e} = \frac{1}{N} \sum_{i=1}^N e_i$ <p>A criterion for the establishing of correspondence should also be stated (e.g. allowing for correspondence to the closest position, correspondence on vertices or along lines). The criterion/criteria for finding the corresponding points shall be reported with the data quality evaluation result.</p> <p>This data quality measure is different from the standard deviation.</p>
Evaluation scope	dataset
Reporting scope	dataset
Parameter	–
Data quality value type	Measure
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	No specific example for version 2.9
Measure identifier	28 (ISO 19157)

The "mean value of positional uncertainties" sub-element shows the closeness of reported coordinate values to values accepted as or being true. **It is used for the features of the Governmental services and Waste management sub-themes only.**

Name	Rate of positional errors above a given threshold
Alternative name	–
Data quality element	Positional accuracy
Data quality sub-element	Absolute or external accuracy
Data quality basic measure	Not applicable
Definition	<p>Number of positional uncertainties above a given threshold for a set of positions in relation to the total number of measured positions.</p> <p>The errors are defined as the distance between a measured position and what is considered as the corresponding true position.</p>
Description	<p>For a number of points (N), the measured positions are given as x_{mi}, y_{mi} and z_{mi} coordinates depending on the dimension in which the position of the point is measured. A corresponding set of coordinates, x_{ti}, y_{ti} and z_{ti}, are considered to represent the true positions. The calculation of e_i is given by the data quality measure "mean value of positional uncertainties" in one, two and three dimensions.</p> <p>All positional uncertainties above a defined threshold e_{max} ($e_i > e_{max}$) are then counted as error. The number of errors is set in relation to the total number of measured points.</p> <p>A criterion for the establishing of correspondence should also be stated (e.g. allowing for correspondence to the closest position, correspondence on vertices or along lines). The criterion/criteria for finding the corresponding points shall be reported with the data quality evaluation result.</p>
Evaluation scope	dataset
Reporting scope	dataset
Parameter	<p>Name: e_{max}</p> <p>Definition: is the threshold above which the positional uncertainties are counted</p> <p>Value type: Number</p>
Data quality value type	Real ; percentage ; ratio

Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	25% of the nodes within the data quality scope have error distance greater than 1 metre
Measure identifier	31 (ISO 19157)

Once again, the POI nature of governmental services data and the needs expressed within the analyzed use cases have clear implications regarding their expected positional accuracy, in the sense that it can be stated that this parameter is not to be critical to assure their quality and their usability

7.1.8. Positional accuracy – Relative or internal accuracy



Recommendation 20

Relative or internal accuracy should be evaluated and documented using Relative horizontal error as specified in the tables below.

Name	Relative horizontal error
Alternative name	Rel CE90
Data quality element	Positional accuracy
Data quality sub-element	Relative or internal accuracy
Data quality basic measure	Not applicable
Definition	Closeness of the relative positions of features in the scope to their respective relative positions accepted as or being true, especially the evaluation of the random errors in the horizontal position of one feature to another in the same dataset or on the same map/chart.

Description	<p>A comparison of the data (measured) and the control (true) is calculated in the following manner:</p> <ol style="list-style-type: none"> Determine all possible point pair combinations: Point Pair Combinations = $m = n(n-1)/2$ Calculate the absolute error in the X and Y dimensions at each point: $\Delta_{X_i} = \text{Measured } X_i - \text{True } X_i$ for $i = 1 \dots n$ $\Delta_{Y_i} = \text{Measured } Y_i - \text{True } Y_i$ for $i = 1 \dots n$ Calculate the relative error in X and Y for all point pair combinations: $\Delta X_{rel\ kj} = \Delta X_k - \Delta X_j$ for $k = 1 \dots m-1, j = k+1, \dots m$ $\Delta Y_{rel\ kj} = \Delta Y_k - \Delta Y_j$ for $k = 1 \dots m-1, j = k+1, \dots m$ Calculate the relative standard deviations in each axis: $\sigma_{X\ rel} = \sqrt{\frac{\sum \Delta X_{rel}^2}{m-1}}$ $\sigma_{Y\ rel} = \sqrt{\frac{\sum \Delta Y_{rel}^2}{m-1}}$ Calculate the relative horizontal standard deviation: $\sigma_{H\ rel} = \sqrt{\frac{\sigma_{X\ rel}^2 + \sigma_{Y\ rel}^2}{2}}$ Calculate the Relative CE by converting the sigma to a 90 % significance level: Rel CE90 = 2,146 $\sigma_{H\ rel}$
Evaluation scope	dataset
Reporting scope	dataset
Parameter	Name: n Definition: Sample size Value type: Integer

Data quality value type	Measure
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality Mapping, Charting and Geodesy Accuracy [Department of Defense (US). Standard Practice: Mapping, Charting and Geodesy Accuracy. MIL STD 600001, 1990]
Example	No specific example for version 2.9
Measure identifier	53 (ISO 19157)

7.1.9. Thematic accuracy – Classification correctness



Recommendation 21

Classification correctness should be evaluated and documented using Misclassification rate as specified in the tables below.

Name	Misclassification rate
Alternative name	–
Data quality element	Thematic accuracy
Data quality sub-element	Classification correctness
Data quality basic measure	Error rate
Definition	Average number of incorrectly classified features in relation to the number of features that are supposed to be within the dataset
Description	To be provided globally as an average value for the whole dataset
Evaluation scope	dataset
Reporting scope	dataset
Parameter	–
Data quality value type	Real, percentage, ratio
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	0.0189 ; 98.11% ; 11:582
Measure identifier	61 (ISO 19157)

7.1.10. Thematic accuracy – Non-quantitative attribute correctness



Recommendation 22

Non-quantitative attribute correctness should be evaluated and documented using Rate of correct attribute values as specified in the tables below.

Name	Rate of correct attribute values
Alternative name	–
Data quality element	Thematic accuracy
Data quality sub-element	Non-quantitative attribute correctness
Data quality basic measure	Correct items rate
Definition	Number of correct attribute values in relation to the total number of attribute values
Description	No specific description for version 2.9
Evaluation scope	dataset
Reporting scope	dataset
Parameter	–
Data quality value type	Real, percentage, ratio
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	0.0189 ; 98.11% ; 11:582
Measure identifier	66 (ISO 19157)

7.1.11. Thematic accuracy – Quantitative attribute accuracy



Recommendation 23

Quantitative attribute accuracy should be evaluated and documented using Attribute value uncertainty at 50 % significance level, Attribute value uncertainty at 90 % significance level, Attribute value uncertainty at 99 % significance level as specified in the tables below.

Name	Attribute value uncertainty at 50 % significance level
Alternative name	–
Data quality element	Thematic accuracy
Data quality sub-element	Quantitative attribute accuracy

Data quality basic measure	LE50 or LE50(r), depending on the evaluation procedure
Definition	Half length of the interval defined by an upper and a lower limit, in which the true value for the quantitative attribute lies with probability 50 %
Description	Please, cf. Annex G § 3.2 "One-dimensional random variable, Z" of the chapter "Uncertainty-related data quality basic measures" of the ISO/DIS 19157 Geographic information – Data quality
Evaluation scope	dataset
Reporting scope	dataset
Parameter	–
Data quality value type	Measure
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	No specific example for version 2.9
Measure identifier	69 (ISO 19157)

Name	Attribute value uncertainty at 90 % significance level
Alternative name	–
Data quality element	Thematic accuracy
Data quality sub-element	Quantitative attribute accuracy
Data quality basic measure	LE90 or LE90(r), depending on the evaluation procedure
Definition	Half length of the interval defined by an upper and a lower limit, in which the true value for the quantitative attribute lies with probability 90 %
Description	Please, cf. Annex G § 3.2 "One-dimensional random variable, Z" of the chapter "Uncertainty-related data quality basic measures" of the ISO/DIS 19157 Geographic information – Data quality
Evaluation scope	dataset
Reporting scope	dataset
Parameter	–

Data quality value type	Measure
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	No specific example for version 2.9
Measure identifier	70 (ISO 19157)

Name	Attribute value uncertainty at 99 % significance level
Alternative name	–
Data quality element	Thematic accuracy
Data quality sub-element	Quantitative attribute accuracy
Data quality basic measure	LE99 or LE99(r), depending on the evaluation procedure
Definition	Half length of the interval defined by an upper and a lower limit, in which the true value for the quantitative attribute lies with probability 99 %
Description	Please, cf. Annex G § 3.2 "One-dimensional random variable, Z" of the chapter "Uncertainty-related data quality basic measures" of the ISO/DIS 19157 Geographic information – Data quality
Evaluation scope	dataset
Reporting scope	dataset
Parameter	–
Data quality value type	Measure
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	No specific example for version 2.9
Measure identifier	72 (ISO 19157)

7.1.12. Temporal quality – Accuracy of a time measurement

Two different measuring elements are proposed:

- Time accuracy at 50% significance level, for the use cases related to mapping and POI querying
- Time accuracy at 95% significance level, for the use cases related to disaster management

Recommendation 24



Accuracy of a time measurement should be evaluated and documented using Time accuracy at 50 % significance level, Time accuracy at 95 % significance level as specified in the tables below.

Name	Time accuracy at 50 % significance level
Alternative name	–
Data quality element	Temporal quality
Data quality sub-element	Accuracy of a time measurement
Data quality basic measure	LE50 or LE50(r), depending on the evaluation procedure
Definition	Half length of the interval defined by an upper and a lower limit, in which the true value for the time instance lies with probability 50 %
Description	Please, cf. Annex G § 3.2 "One-dimensional random variable, Z" of the chapter "Uncertainty-related data quality basic measures" of the ISO/DIS 19157 Geographic information – Data quality
Evaluation scope	dataset
Reporting scope	dataset
Parameter	–
Data quality value type	Measure
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	No specific example for version 2.9
Measure identifier	55 (ISO 19157)

Name	Time accuracy at 95 % significance level
Alternative name	–
Data quality element	Temporal quality
Data quality sub-element	Accuracy of a time measurement
Data quality basic measure	LE95 or LE95(r), depending on the evaluation procedure
Definition	Half length of the interval defined by an upper and a lower limit, in which the true value for the time instance lies with probability 95 %

Description	Please, cf. Annex G § 3.2 "One-dimensional random variable, Z" of the chapter "Uncertainty-related data quality basic measures" of the ISO/DIS 19157 Geographic information – Data quality
Evaluation scope	dataset
Reporting scope	dataset
Parameter	–
Data quality value type	Measure
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage
Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	No specific example for version 2.9
Measure identifier	57 (ISO 19157)

7.1.13. Temporal quality – Temporal consistency



Recommendation 25

Temporal consistency should be evaluated and documented using Value domain conformance rate as specified in the tables below.

Name	Value domain conformance rate
Alternative name	–
Data quality element	Temporal quality
Data quality sub-element	Temporal consistency
Data quality basic measure	Correct items rate
Definition	Number of items in the dataset that are in conformance with their value domain in relation to the total number of items in the dataset
Description	No specific description for version 2.9
Evaluation scope	dataset
Reporting scope	dataset
Parameter	–
Data quality value type	Real, percentage, ratio
Data quality value structure	Single value, Bag, Set, Sequence, Table, Matrix or Coverage

Source reference	ISO/DIS 19157 Geographic information – Data quality
Example	0.0189 ; 98.11% ; 11:582
Measure identifier	17 (ISO 19157)

7.2. Minimum data quality requirements

No minimum data quality requirements are defined for the spatial data theme *Utility and Government Services*.

7.3. Recommendation on data quality

No minimum data quality recommendations are defined.

8. Dataset-level metadata

This section specifies dataset-level metadata elements, which should be used for documenting metadata for a complete dataset or dataset series.

NOTE Metadata can also be reported for each individual spatial object (spatial object-level metadata). Spatial object-level metadata is fully described in the application schema(s) (section 5).

For some dataset-level metadata elements, in particular those for reporting data quality and maintenance, a more specific scope can be specified. This allows the definition of metadata at sub-dataset level, e.g. separately for each spatial object type (see instructions for the relevant metadata element).

8.1. Metadata elements defined in INSPIRE Metadata Regulation

Table 4 gives an overview of the metadata elements specified in Regulation 1205/2008/EC (implementing Directive 2007/2/EC of the European Parliament and of the Council as regards metadata).

The table contains the following information:

- The first column provides a reference to the relevant section in the Metadata Regulation, which contains a more detailed description.
- The second column specifies the name of the metadata element.
- The third column specifies the multiplicity.
- The fourth column specifies the condition, under which the given element becomes mandatory.

Table 4 – Metadata for spatial datasets and spatial dataset series specified in Regulation 1205/2008/EC

Metadata Regulation Section	Metadata element	Multiplicity	Condition
1.1	Resource title	1	
1.2	Resource abstract	1	
1.3	Resource type	1	
1.4	Resource locator	0..*	Mandatory if a URL is available to obtain more information on the resource, and/or access related services.
1.5	Unique resource identifier	1..*	

1.7	Resource language	0..*	Mandatory if the resource includes textual information.
2.1	Topic category	1..*	
3	Keyword	1..*	
4.1	Geographic bounding box	1..*	
5	Temporal reference	1..*	
6.1	Lineage	1	
6.2	Spatial resolution	0..*	Mandatory for data sets and data set series if an equivalent scale or a resolution distance can be specified.
7	Conformity	1..*	
8.1	Conditions for access and use	1..*	
8.2	Limitations on public access	1..*	
9	Responsible organisation	1..*	
10.1	Metadata point of contact	1..*	
10.2	Metadata date	1	
10.3	Metadata language	1	

Generic guidelines for implementing these elements using ISO 19115 and 19119 are available at <http://inspire.jrc.ec.europa.eu/index.cfm/pageid/101>. The following sections describe additional theme-specific recommendations and requirements for implementing these elements.

8.1.1. Conformity

The *Conformity* metadata element defined in Regulation 1205/2008/EC requires to report the conformance with the Implementing Rule for interoperability of spatial data sets and services. In addition, it may be used also to document the conformance to another specification.



Recommendation 26

Dataset metadata should include a statement on the overall conformance of the dataset with this data specification (i.e. conformance with all requirements).



Recommendation 27

The *Conformity* metadata element should be used to document conformance with this data specification (as a whole), with a specific conformance class defined in the Abstract Test Suite in Annex A and/or with another specification.

The *Conformity* element includes two sub-elements, the *Specification* (a citation of the Implementing Rule for interoperability of spatial data sets and services or other specification), and the *Degree* of conformity. The *Degree* can be *Conformant* (if the dataset is fully conformant with the cited specification), *Not Conformant* (if the dataset does not conform to the cited specification) or *Not Evaluated* (if the conformance has not been evaluated).

Recommendation 28



If a dataset is not yet conformant with all requirements of this data specification, it is recommended to include information on the conformance with the individual conformance classes specified in the Abstract Test Suite in Annex A.

Recommendation 29



If a dataset is produced or transformed according to an external specification that includes specific quality assurance procedures, the conformity with this specification should be documented using the *Conformity* metadata element.

Recommendation 30



If minimum data quality recommendations are defined then the statement on the conformity with these requirements should be included using the *Conformity* metadata element and referring to the relevant data quality conformance class in the Abstract Test Suite.

NOTE Currently no minimum data quality requirements are included in the IRs. The recommendation above should be included as a requirement in the IRs if minimum data quality requirements are defined at some point in the future.

Recommendation 31



When documenting conformance with this data specification or one of the conformance classes defined in the Abstract Test Suite, the *Specification* sub-element should be given using the http URI identifier of the conformance class or using a citation including the following elements:

- title: "INSPIRE Data Specification on *Utility and Government Services* – Technical Guidelines – <name of the conformance class>"
- date:
 - dateType: publication
 - date: 2013-12-10

EXAMPLE 1: The XML snippets below show how to fill the *Specification* sub-element for

documenting conformance with the whole data specification on Addresses v3.0.1.

```
<gmd:DQ_ConformanceResult>
  <gmd:specification href="http://inspire.ec.europa.eu/conformanceClass/ad/3.0.1/tg"
/>
  <gmd:explanation> (...) </gmd:explanation>
  <gmd:pass> (...) </gmd:pass>
</gmd:DQ_ConformanceResult>
```

or (using a citation):

```
<gmd:DQ_ConformanceResult>
  <gmd:specification>
    <gmd:CI_Citation>
      <gmd:title>
        <gco:CharacterString>INSPIRE Data Specification on Utility and
Government Services – Technical Guidelines</gco:CharacterString>
      </gmd:title>
      <gmd:date>
        <gmd:date>
          <gco:Date>2013-12-10</gco:Date>
        </gmd:date>
        <gmd:dateType>
          <gmd:CI_DateTypeCode
codeList="http://standards.iso.org/ittf/PubliclyAvailableStandards/ISO_19139_Schemas/r
esou
rces/Codelist/ML_gmxCodeLists.xml#CI_DateTypeCode"
codeListValue="publication">publication</gmd:CI_DateTypeCode>
          </gmd:dateType>
        </gmd:date>
      </gmd:CI_Citation>
    </gmd:specification>
    <gmd:explanation> (...) </gmd:explanation>
    <gmd:pass> (...) </gmd:pass>
  </gmd:DQ_ConformanceResult>
```

EXAMPLE 2: The XML snippets below show how to fill the *Specification* sub-element for documenting conformance with the CRS conformance class of the data specification on Addresses v3.0.1.

```
<gmd:DQ_ConformanceResult>
  <gmd:specification
href="http://inspire.ec.europa.eu/conformanceClass/ad/3.0.1/crs" />
  <gmd:explanation> (...) </gmd:explanation>
  <gmd:pass> (...) </gmd:pass>
</gmd:DQ_ConformanceResult>
```

or (using a citation):

```
<gmd:DQ_ConformanceResult>
  <gmd:specification>
    <gmd:CI_Citation>
      <gmd:title>
        <gco:CharacterString>INSPIRE Data Specification on Utility and
Government Services – Technical Guidelines – CRS</gco:CharacterString>
      </gmd:title>
      <gmd:date>
        <gmd:date>
          <gco:Date>2013-12-10</gco:Date>
        </gmd:date>
        <gmd:dateType>
          <gmd:CI_DateTypeCode
codeList="http://standards.iso.org/ittf/PubliclyAvailableStandards/ISO_19139_Schemas/r
esou
rces/Codelist/ML_gmxCodeLists.xml#CI_DateTypeCode"
codeListValue="publication">publication</gmd:CI_DateTypeCode>
          </gmd:dateType>
        </gmd:date>
      </gmd:CI_Citation>
    </gmd:specification>
    <gmd:explanation> (...) </gmd:explanation>
    <gmd:pass> (...) </gmd:pass>
  </gmd:DQ_ConformanceResult>
```

8.1.2. Lineage

Recommendation 32



Following the ISO/DIS 19157 Quality principles, if a data provider has a procedure for the quality management of their spatial data sets then the appropriate data quality elements and measures defined in ISO/DIS 19157 should be used to evaluate and report (in the metadata) the results. If not, the *Lineage* metadata element (defined in Regulation 1205/2008/EC) should be used to describe the overall quality of a spatial data set.

According to Regulation 1205/2008/EC, lineage "is a statement on process history and/or overall quality of the spatial data set. Where appropriate it may include a statement whether the data set has been validated or quality assured, whether it is the official version (if multiple versions exist), and whether it has legal validity. The value domain of this metadata element is free text".

The Metadata Technical Guidelines based on EN ISO 19115 and EN ISO 19119 specifies that the statement sub-element of LI_Lineage (EN ISO 19115) should be used to implement the lineage metadata element.



Recommendation 33

To describe the transformation steps and related source data, it is recommended to use the following sub-elements of LI_Lineage:

- For the description of the transformation process of the local to the common INSPIRE data structures, the LI_ProcessStep sub-element should be used.
- For the description of the source data the LI_Source sub-element should be used.

NOTE 1 In order to improve the interoperability, domain templates and instructions for using these free text elements (descriptive statements) may be specified here and/or in an Annex of this data specification.

8.1.3. Temporal reference

According to Regulation 1205/2008/EC, at least one of the following temporal reference metadata sub-elements shall be provided: temporal extent, date of publication, date of last revision, date of creation.

Recommendation 34



It is recommended that at least the date of the last revision of a spatial data set should be reported using the *Date of last revision* metadata sub-element.

8.2. Metadata elements for interoperability

IR Requirement

Article 13

Metadata required for Interoperability

The metadata describing a spatial data set shall include the following metadata elements required for interoperability:

1. Coordinate Reference System: Description of the coordinate reference system(s) used in the data set.
2. Temporal Reference System: Description of the temporal reference system(s) used in the data set.



This element is mandatory only if the spatial data set contains temporal information that does not refer to the default temporal reference system.

3. Encoding: Description of the computer language construct(s) specifying the representation of data objects in a record, file, message, storage device or transmission channel.
4. Topological Consistency: Correctness of the explicitly encoded topological characteristics of the data set as described by the scope.

This element is mandatory only if the data set includes types from the Generic

Network Model and does not assure centreline topology (connectivity of centrelines) for the network.

5. Character Encoding: The character encoding used in the data set.

This element is mandatory only if an encoding is used that is not based on UTF-8.

6. Spatial Representation Type: The method used to spatially represent geographic information.

These Technical Guidelines propose to implement the required metadata elements based on ISO 19115 and ISO/TS 19139.

The following TG requirements need to be met in order to be conformant with the proposed encoding.



TG Requirement 3

Metadata instance (XML) documents shall validate without error against the used ISO 19139 XML schema.

NOTE Section 2.1.2 of the Metadata Technical Guidelines discusses the different ISO 19139 XML schemas that are currently available.



TG Requirement 4

Metadata instance (XML) documents shall contain the elements and meet the INSPIRE multiplicity specified in the sections below.



TG Requirement 5

The elements specified below shall be available in the specified ISO/TS 19139 path.



Recommendation 35

The metadata elements for interoperability should be made available together with the metadata elements defined in the Metadata Regulation through an INSPIRE discovery service.

NOTE While this not explicitly required by any of the INSPIRE Implementing Rules, making all metadata of a data set available together and through one service simplifies implementation and usability.

8.2.1. Coordinate Reference System

Metadata element name	Coordinate Reference System
Definition	Description of the coordinate reference system used in the dataset.
ISO 19115 number and name	13. referenceSystemInfo
ISO/TS 19139 path	referenceSystemInfo
INSPIRE obligation / condition	mandatory
INSPIRE multiplicity	1..*
Data type(and ISO 19115 no.)	186. MD_ReferenceSystem
Domain	<p>To identify the reference system, the referenceSystemIdentifier (RS_Identifier) shall be provided.</p> <p>NOTE More specific instructions, in particular on pre-defined values for filling the referenceSystemIdentifier attribute should be agreed among Member States during the implementation phase to support interoperability.</p>
Implementing instructions	
Example	<p>referenceSystemIdentifier: code: ETRS_89 codeSpace: INSPIRE RS registry</p>
Example XML encoding	<pre> <gmd:referenceSystemInfo> <gmd:MD_ReferenceSystem> <gmd:referenceSystemIdentifier> <gmd:RS_Identifier> <gmd:code> <gco:CharacterString>ETRS89 </gco:CharacterString> </gmd:code> <gmd:codeSpace> <gco:CharacterString>INSPIRE RS registry</gco:CharacterString> </gmd:codeSpace> </gmd:RS_Identifier> </gmd:referenceSystemIdentifier> </gmd:MD_ReferenceSystem> </gmd:referenceSystemInfo> </pre>
Comments	

8.2.2. Temporal Reference System

Metadata element name	Temporal Reference System
Definition	Description of the temporal reference systems used in the dataset.
ISO 19115 number and name	13. referenceSystemInfo
ISO/TS 19139 path	referenceSystemInfo
INSPIRE obligation / condition	Mandatory, if the spatial data set or one of its feature types contains temporal information that does not refer to the Gregorian Calendar or the Coordinated Universal Time.
INSPIRE multiplicity	0..*
Data type(and ISO 19115 no.)	186. MD_ReferenceSystem
Domain	<p>No specific type is defined in ISO 19115 for temporal reference systems. Thus, the generic MD_ReferenceSystem element and its reference SystemIdentifier (RS_Identifier) property shall be provided.</p> <p>NOTE More specific instructions, in particular on pre-defined values for filling the referenceSystemIdentifier attribute should be agreed among Member States during the implementation phase to support interoperability.</p>
Implementing instructions	
Example	<pre>referenceSystemIdentifier: code: GregorianCalendar codeSpace: INSPIRE RS registry</pre>
Example XML encoding	<pre><gmd:referenceSystemInfo> <gmd:MD_ReferenceSystem> <gmd:referenceSystemIdentifier> <gmd:RS_Identifier> <gmd:code> <gco:CharacterString>GregorianCalendar </gco:CharacterString> </gmd:code> <gmd:codeSpace> <gco:CharacterString>INSPIRE RS registry</gco:CharacterString> </gmd:codeSpace> </gmd:RS_Identifier> </gmd:referenceSystemIdentifier> </gmd:MD_ReferenceSystem> </gmd:referenceSystemInfo></pre>

Metadata element name	Temporal Reference System
Comments	

8.2.3. Encoding

Metadata element name	Encoding
Definition	Description of the computer language construct that specifies the representation of data objects in a record, file, message, storage device or transmission channel
ISO 19115 number and name	271. distributionFormat
ISO/TS 19139 path	distributionInfo/MD_Distribution/distributionFormat
INSPIRE obligation / condition	mandatory
INSPIRE multiplicity	1..*
Data type (and ISO 19115 no.)	284. MD_Format
Domain	See B.2.10.4. The property values (name, version, specification) specified in section 5 shall be used to document the default and alternative encodings.
Implementing instructions	
Example	name: <Application schema name> GML application schema version: version 3.0 specification: D2.8.III.6 Data Specification on <i>Utility and Government Services</i> – Technical Guidelines
Example XML encoding	<pre> <gmd:MD_Format> <gmd:name> <gco:CharacterString>SomeApplicationSchema GML application schema</gco:CharacterString> </gmd:name> <gmd:version> <gco:CharacterString>3.0</gco:CharacterString> </gmd:version> <gmd:specification> <gco:CharacterString>D2.8.III.6 Data Specification on Utility and Government Services □ Technical Guidelines</gco:CharacterString> </gmd:specification> </gmd:MD_Format> </pre>

Metadata element name	Encoding
Comments	

8.2.4. Character Encoding

Metadata element name	Character Encoding
Definition	The character encoding used in the data set.
ISO 19115 number and name	
ISO/TS 19139 path	
INSPIRE obligation / condition	Mandatory, if an encoding is used that is not based on UTF-8.
INSPIRE multiplicity	0..*
Data type (and ISO 19115 no.)	
Domain	
Implementing instructions	
Example	-
Example XML encoding	<pre><gmd:characterSet> <gmd:MD_CharacterSetCode codeListValue="8859part2" codeList="http://standards.iso.org/ittf/PubliclyAvailableStandards/ISO_19139_Schemas/resources/Codelist/ML_gmxCodeLists.xml#CharacterSetCode">8859-2</gmd:MD_CharacterSetCode> </gmd:characterSet></pre>
Comments	

8.2.5. Spatial representation type

Metadata element name	Spatial representation type
Definition	The method used to spatially represent geographic information.
ISO 19115 number and name	37. spatialRepresentationType
ISO/TS 19139 path	
INSPIRE obligation / condition	Mandatory

Metadata element name	Spatial representation type
INSPIRE multiplicity	1..*
Data type (and ISO 19115 no.)	B.5.26 MD_SpatialRepresentationTypeCode
Domain	
Implementing instructions	Of the values included in the code list in ISO 19115 (vector, grid, textTable, tin, stereoModel, video), only vector, grid and tin should be used. NOTE Additional code list values may be defined based on feedback from implementation.
Example	-
Example XML encoding	
Comments	

8.2.6. Data Quality – Logical Consistency – Topological Consistency

See section 8.3.2 for instructions on how to implement metadata elements for reporting data quality.

8.3. Recommended theme-specific metadata elements



Recommendation 36

The metadata describing a spatial data set or a spatial data set series related to the theme *Utility and Government Services* should comprise the theme-specific metadata elements specified in Table 5.

The table contains the following information:

- The first column provides a reference to a more detailed description.
- The second column specifies the name of the metadata element.
- The third column specifies the multiplicity.

Table 5 – Optional theme-specific metadata elements for the theme *Utility and Government Services*

Section	Metadata element	Multiplicity
8.3.1	Maintenance Information	0..1
8.3.2	Logical Consistency – Conceptual Consistency	0..*

8.3.2	Logical Consistency – Domain Consistency	0..*
-------	--	------

Recommendaton 37



For implementing the metadata elements included in this section using ISO 19115, ISO/DIS 19157 and ISO/TS 19139, the instructions included in the relevant sub-sections should be followed.

8.3.1. Maintenance Information

Metadata element name	Maintenance information
Definition	Information about the scope and frequency of updating
ISO 19115 number and name	30. resourceMaintenance
ISO/TS 19139 path	identificationInfo/MD_Identification/resourceMaintenance
INSPIRE obligation / condition	optional
INSPIRE multiplicity	0..1
Data type(and ISO 19115 no.)	142. MD_MaintenanceInformation
Domain	<p>This is a complex type (lines 143-148 from ISO 19115).</p> <p>At least the following elements should be used (the multiplicity according to ISO 19115 is shown in parentheses):</p> <ul style="list-style-type: none"> • maintenanceAndUpdateFrequency [1]: frequency with which changes and additions are made to the resource after the initial resource is completed / domain value: MD_MaintenanceFrequencyCode: • updateScope [0..*]: scope of data to which maintenance is applied / domain value: MD_ScopeCode • maintenanceNote [0..*]: information regarding specific requirements for maintaining the resource / domain value: free text
Implementing instructions	
Example	
Example XML encoding	
Comments	

8.3.2. Metadata elements for reporting data quality

Recommendation 38



For reporting the results of the data quality evaluation, the data quality elements, sub-elements and (for quantitative evaluation) measures defined in chapter 7 should be used.

Recommendation 39



The metadata elements specified in the following sections should be used to report the results of the data quality evaluation. At least the information included in the row "Implementation instructions" should be provided.

The first section applies to reporting quantitative results (using the element DQ_QuantitativeResult), while the second section applies to reporting non-quantitative results (using the element DQ_DescriptiveResult).

Recommendation 40



If a dataset does not pass the tests of the Application schema conformance class (defined in Annex A), the results of each test should be reported using one of the options described in sections 8.3.2.1 and 8.3.2.2.

NOTE 1 If using non-quantitative description, the results of several tests do not have to be reported separately, but may be combined into one descriptive statement.

NOTE 2 The sections 8.3.2.1 and 8.3.2.2 may need to be updated once the XML schemas for ISO 19157 have been finalised.

The scope for reporting may be different from the scope for evaluating data quality (see section 7). If data quality is reported at the data set or spatial object type level, the results are usually derived or aggregated.

Recommendation 41

The scope element (of type DQ_Scope) of the DQ_DataQuality subtype should be used to encode the reporting scope.



Only the following values should be used for the level element of DQ_Scope: Series, Dataset, featureType.

If the level is featureType the levelDescription/MDScopeDescription/features element (of type Set< GF_FeatureType>) shall be used to list the feature type names.

NOTE In the level element of DQ_Scope, the value featureType is used to denote spatial object type.

8.3.2.1. Guidelines for reporting quantitative results of the data quality evaluation

Metadata element name	See chapter 7
Definition	See chapter 7
ISO/DIS 19157 number and name	3. report
ISO/TS 19139 path	dataQualityInfo/*/report
INSPIRE obligation / condition	optional
INSPIRE multiplicity	0..*
Data type (and ISO/DIS 19157 no.)	Corresponding DQ_XXX subelement from ISO/DIS 19157, e.g. 12. DQ_CompletenessCommission
Domain	Lines 7-9 from ISO/DIS 19157 7. DQ_MeasureReference (C.2.1.3) 8. DQ_EvaluationMethod (C.2.1.4.) 9. DQ_Result (C2.1.5.)
Implementing instructions	39. nameOfMeasure NOTE This should be the name as defined in Chapter 7. 42. evaluationMethodType 43. evaluationMethodDescription NOTE If the reported data quality results are derived or aggregated (i.e. the scope levels for evaluation and reporting are different), the derivation or aggregation should also be specified using this property. 46. dateTime NOTE This should be data or range of dates on which the data quality measure was applied. 63. DQ_QuantitativeResult / 64. value NOTE The DQ_Result type should be DQ_QuantitativeResult and the value(s) represent(s) the application of the data quality measure (39.) using the specified evaluation method (42-43.)
Example	See Table E.12 — Reporting commission as metadata (ISO/DIS 19157)
Example XML encoding	

8.3.2.2. Guidelines for reporting descriptive results of the Data Quality evaluation

Metadata element name	See chapter 7
Definition	See chapter 7
ISO/DIS 19157 number and name	3. report
ISO/TS 19139 path	dataQualityInfo/*/report
INSPIRE obligation / condition	optional
INSPIRE multiplicity	0..*
Data type (and ISO/DIS 19157 no.)	Corresponding DQ_XXX subelement from ISO/DIS 19157, e.g. 12. DQ_CompletenessCommission
Domain	Line 9 from ISO/DIS 19157 9. DQ_Result (C2.1.5.)
Implementing instructions	67. DQ_DescriptiveResult / 68. statement NOTE The DQ_Result type should be DQ_DescriptiveResult and in the statement (68.) the evaluation of the selected DQ sub-element should be expressed in a narrative way.
Example	See Table E.15 — Reporting descriptive result as metadata (ISO/DIS 19157)
Example XML encoding	

9. Delivery

9.1. Updates



IR Requirement

Article 8

Updates

1. Member States shall make available updates of data on a regular basis.
2. All updates shall be made available at the latest 6 months after the change was applied in the source data set, unless a different period is specified for a specific spatial data theme in Annex II.

NOTE In this data specification, no exception is specified, so all updates shall be made available at the latest 6 months after the change was applied in the source data set.

9.2. Delivery medium

According to Article 11(1) of the INSPIRE Directive, Member States shall establish and operate a network of services for INSPIRE spatial data sets and services. The relevant network service types for making spatial data available are:

- *view services* making it possible, as a minimum, to display, navigate, zoom in/out, pan, or overlay viewable spatial data sets and to display legend information and any relevant content of metadata;
- *download services*, enabling copies of spatial data sets, or parts of such sets, to be downloaded and, where practicable, accessed directly;
- *transformation services*, enabling spatial data sets to be transformed with a view to achieving interoperability.

NOTE For the relevant requirements and recommendations for network services, see the relevant Implementing Rules and Technical Guidelines^[22].

EXAMPLE 1 Through the Get Spatial Objects function, a download service can either download a pre-defined data set or pre-defined part of a data set (non-direct access download service), or give direct access to the spatial objects contained in the data set, and download selections of spatial objects based upon a query (direct access download service). To execute such a request, some of the following information might be required:

- the list of spatial object types and/or predefined data sets that are offered by the download service (to be provided through the Get Download Service Metadata operation),
- and the query capabilities section advertising the types of predicates that may be used to form a query expression (to be provided through the Get Download Service Metadata operation, where applicable),
- a description of spatial object types offered by a download service instance (to be provided

through the Describe Spatial Object Types operation).

EXAMPLE 2 Through the Transform function, a transformation service carries out data content transformations from native data forms to the INSPIRE-compliant form and vice versa. If this operation is directly called by an application to transform source data (e.g. obtained through a download service) that is not yet conformant with this data specification, the following parameters are required:

Input data (mandatory). The data set to be transformed.

- Source model (mandatory, if cannot be determined from the input data). The model in which the input data is provided.
- Target model (mandatory). The model in which the results are expected.
- Model mapping (mandatory, unless a default exists). Detailed description of how the transformation is to be carried out.

9.3. Encodings

The IRs contain the following two requirements for the encoding to be used to make data available.

IR Requirement

Article 7

Encoding



1. Every encoding rule used to encode spatial data shall conform to EN ISO 19118. In particular, it shall specify schema conversion rules for all spatial object types and all attributes and association roles and the output data structure used.
2. Every encoding rule used to encode spatial data shall be made available.
 - 2a. Every encoding rule used to encode spatial data shall also specify whether and how to represent attributes and association roles for which a corresponding value exists but is not contained in the spatial data sets maintained by a Member State, or cannot be derived from existing values at reasonable costs.

NOTE ISO 19118:2011 specifies the requirements for defining encoding rules used for interchange of geographic data within the set of International Standards known as the "ISO 19100 series". An encoding rule allows geographic information defined by application schemas and standardized schemas to be coded into a system-independent data structure suitable for transport and storage. The encoding rule specifies the types of data being coded and the syntax, structure and coding schemes used in the resulting data structure. Specifically, ISO 19118:2011 includes

- requirements for creating encoding rules based on UML schemas,
- requirements for creating encoding services, and
- requirements for XML-based encoding rules for neutral interchange of data.

While the IRs do not oblige the usage of a specific encoding, these Technical Guidelines propose to make data related to the spatial data theme *Utility and Government Services* available at least in the

default encoding(s) specified in section 0. In this section, a number of TG requirements are listed that need to be met in order to be conformant with the default encoding(s).

The proposed default encoding(s) meet the requirements in Article 7 of the IRs, i.e. they are conformant with ISO 19118 and (since they are included in this specification) publicly available.

9.3.1. Default Encoding(s)

9.3.1.1. Specific requirements for GML encoding

This data specification proposes the use of GML as the default encoding, as recommended in sections 7.2 and 7.3 of [DS-D2.7]. GML is an XML encoding in compliance with ISO 19118, as required in Article 7(1). For details, see [ISO 19136], and in particular Annex E (UML-to-GML application schema encoding rules).

The following TG requirements need to be met in order to be conformant with GML encodings.



TG Requirement 6

Data instance (XML) documents shall validate without error against the provided XML schema.

NOTE 1 Not all constraints defined in the application schemas can be mapped to XML. Therefore, the following requirement is necessary.

NOTE 2 The obligation to use only the allowed code list values specified for attributes and most of the constraints defined in the application schemas cannot be mapped to the XML sch. They can therefore not be enforced through schema validation. It may be possible to express some of these constraints using other schema or rule languages (e.g. Schematron), in order to enable automatic validation.

9.3.1.2. Default encoding for application schema **AdministrativeAndSocialGovernmentalServices**

Name: AdministrativeAndSocialGovernmentalServices GML Application Schema

Version: 3.0

Specification: D2.8.III.6 Data Specification on Utility and Governmental Services – Technical Guidelines

Character set: UTF-8

The xml schema document is available from <http://inspire.jrc.ec.europa.eu/schemas/us-govserv/3.0>

9.3.1.3. Default encoding for application schema **ExtensionAdministrativeAndSocialGovernmentalServices**

Name: ExtensionAdministrativeAndSocialGovernmentalServices GML Application Schema

Version: 3.0

Specification: D2.8.III.6 Data Specification on Utility and Governmental Services – Technical Guidelines

Character set: UTF-8

The xml schema document is available from <http://inspire.jrc.ec.europa.eu/draft-schemas/us-govserv/3.0>

9.3.1.4. Default encoding for application schema EnvironmentalManagementFacilities

Name: EnvironmentalManagementFacilities GML Application Schema

Version: 3.0

Specification: D2.8.III.6 Data Specification on Utility and Governmental Services – Technical Guidelines

Character set: UTF-8

The xml schema document is available from <http://inspire.jrc.ec.europa.eu/schemas/us-emf/3.0>

9.3.1.5. Default encoding for application schema CommonUtilityNetworkElements

Name: CommonUtilityNetworkElements GML Application Schema

Version: 3.0

Specification: D2.8.III.6 Data Specification on Utility and Governmental Services – Technical Guidelines

Character set: UTF-8

The xml schema document is available from <http://inspire.jrc.ec.europa.eu/schemas/us-net-common/3.0>

9.3.1.6. Default encoding for application schema Electricity Network

Name: ElectricityNetwork GML Application Schema

Version: 3.0

Specification: D2.8.III.6 Data Specification on Utility and Governmental Services – Technical Guidelines

Character set: UTF-8

The xml schema document is available from <http://inspire.jrc.ec.europa.eu/schemas/us-net-el/3.0>

9.3.1.7. Default encoding for application schema Oil-Gas-Chemicals Network

Name: Oil-Gas-Chemicals Network GML Application Schema

Version: 3.0

Specification: D2.8.III.6 Data Specification on Utility and Governmental Services – Technical Guidelines

Character set: UTF-8

The xml schema document is available from <http://inspire.jrc.ec.europa.eu/schemas/us-net-ogc/3.0>

9.3.1.8. Default encoding for application schema Sewer Network

Name: Sewer Network GML Application Schema

Version: 3.0

Specification: D2.8.III.6 Data Specification on Utility and Governmental Services – Technical Guidelines

Character set: UTF-8

The xml schema document is available from <http://inspire.jrc.ec.europa.eu/schemas/us-net-sw/3.0>

9.3.1.9. Default encoding for application schema Thermal Network

Name: Thermal Network GML Application Schema

Version: 3.0

Specification: D2.8.III.6 Data Specification on Utility and Governmental Services – Technical Guidelines

Character set: UTF-8

The xml schema document is available from <http://inspire.jrc.ec.europa.eu/schemas/us-net-th/3.0>

9.3.1.10. Default encoding for application schema Water Network

Name: Water Network GML Application Schema

Version: 3.0

Specification: D2.8.III.6 Data Specification on Utility and Governmental Services – Technical Guidelines

Character set: UTF-8

The xml schema document is available from <http://inspire.jrc.ec.europa.eu/schemas/us-net-wa/3.0>

10. Data Capture

For Utility networks

The data capture for utility networks refers a lot to any other network.

Then, please have a look to what has been written in *Transport Networks* data specification document, regarding network data capture, this will be relevant for this sub-theme too.

For Administrative and social governmental services



Recommendation 42

All administrative and social governmental services data which fall under the INSPIRE scope shall be published

Administrative and social governmental services data, due to their nature, may be captured and provided by different producers at different levels of (mainly) Public Administration, from local to European, depending on what is the level and the administrative scope of the correspondent responsible party.

Due to this fact, it is expected that data are provided at very different scales/resolutions, covering different sub-sets of service types and following different modelling approaches, depending on the concrete needs of their producers and target users. This way, it can not be expected that a single set of requirements may be established in order to harmonize this theme's data sets. In consequence, just the recommendations that follow are proposed:



Recommendation 43

Data should be captured in such conditions that they may be classified into one or several of the service types listed within ServiceTypeValue codelist.

In order to fulfill the previous recommendation:



Recommendation 44

Datasets should be built by setting different sub-sets for each of the service types covered.

If the dataset fulfills only administrative and social governmental services model, each one of the resulting sub-sets shall correspond to one of the service types included in, at least, main level of ServiceTypeValue codelist.

When data about an instance of administrative and social governmental services is located by means of a point or an address:



Recommendation 45

Point or address locations should correspond to the main access point to the space

where the service is provided from.

In the case that different services are provided from a single building/facility, they may be located by different points/addresses by following the previous recommendation to each of those points/addresses. I.e: a hospital may consist of different buildings. If hospital service is modelled as a whole, its location point or address should correspond to that of the main entrance to the hospital. In the opposite, if different services (e.g. General hospital service or Specialized hospital service) within the hospital building or facility are modelled separately, their location references should correspond, whenever possible, to the main access point to each of those services.

With regards to data referring to hydrants or emergency call points, which are nodes of, respectively, water supply networks and communication networks, whenever possible:

Recommendation 46



Data describing services provided from points within a facility network should be located, whenever possible, by referencing them to the correspondent network node elements.

For Environmental Management Facilities

Recommendation 47



Given that it is not expected that all of the available datasets are captured, produced and publicized by a single level of Public Administration Bodies and that it may happen that these bodies may be responsible for just one or several sub-sets of data, not necessarily categorizing the Activities following the NACE Code List, data should be transformed in such a way that at least the main class of the model (linked with Activity Complex) should be categorized by at least one of the Activities listed within the NACE Code List.

Recommendation 48



If the current thematic Legislative Act fix certain parameters for accuracy in the Geographical location of the entities (Geographical Coordinates), these should be considered as the minimum level of accuracy under INSPIRE (e.g. *Location of the Holding* under REGULATION (EC) No 1166/2008)

Recommendation 49



In order to minimize the risk of geometrical and positional incoherence between different datasets Economical Activities, when data about an instance is located by means of GM_Object, it is recommended to choose GM_Point as default.

Recommendation 50



When data about an instance of Economical Activities is located by means of a point or an address geo-location, this should correspond to the main access point

to the space where the service is provided from. Only contrasted geo-located locations against the reality should be provided in order to avoid errors and misunderstandings.

11. Portrayal

This clause defines the rules for layers and styles to be used for portrayal of the spatial object types defined for this theme. Portrayal is regulated in Article 14 of the IRs.

IR Requirement

Article 14

Portrayal



1. For the portrayal of spatial data sets using a view network service as specified in Commission Regulation No 976/2009 (^[24]), the following shall be available:
 - a. the layers specified in Annex II for the theme or themes the data set is related to;
 - b. for each layer at least a default portrayal style, with as a minimum an associated title and a unique identifier.
2. For each layer, Annex II defines the following:
 - a. a human readable title of the layer to be used for display in user interface;
 - b. the spatial object type(s), or sub-set thereof, that constitute(s) the content of the layer.

In section 11.1, the *types* of layers are defined that are to be used for the portrayal of the spatial object types defined in this specification. A view service may offer several layers of the same type, one for each dataset that it offers data on a specific topic.

NOTE The layer specification in the IRs only contains the name, a human readable title and the (subset(s) of) spatial object type(s), that constitute(s) the content of the layer. In addition, these Technical Guidelines suggest keywords for describing the layer.

Recommendation 51



It is recommended to use the keywords specified in section 11.1 in the *Layers Metadata parameters* of the INSPIRE View service (see Annex III, Part A, section 2.2.4 in Commission Regulation (EC) No 976/2009).

Section 11.2 specifies one style for each of these layers. It is proposed that INSPIRE view services support this style as the default style required by Article 14(1b).



TG Requirement 7

For each layer specified in this section, the styles defined in section 11.2 shall be available.

NOTE The default style should be used for portrayal by the view network service if no user-defined style is specified in a portrayal request for a specific layer.

In section 11.2, further styles can be specified that represent examples of styles typically used in a

thematic domain. It is recommended that also these styles should be supported by INSPIRE view services, where applicable.



Recommendation 52

In addition, it is recommended that, where applicable, INSPIRE view services also support the styles defined in section 11.2.

Where XML fragments are used in the following sections, the following namespace prefixes apply:

- sld="http://www.opengis.net/sld" (WMS/SLD 1.1)
- se="http://www.opengis.net/se" (SE 1.1)
- ogc="http://www.opengis.net/ogc" (FE 1.1)

11.1. Layers to be provided by INSPIRE view services

Layer Name	Layer Title	Spatial object type(s)	Keywords
US.UtilityNetwork	Utility Network	Appurtenance, Manhole, Tower, Pole, Cabinet, Duct, Pipe	Appurtenance, Manhole, Tower, Pole, Cabinet, Duct, Pipe
US.ElectricityNetwork	Electricity Network	Electricity Cable, Appurtenance (if included in an electricity network)	Electricity Network
US.OilGasChemicalsNetwork	Oil, Gas or Chemicals Network	OilGasChemicalsPipe, Appurtenance (if included in an oil, gas or chemicals network)	Oil Pipe, Gas Pipe, Chemical Pipe.
US.SewerNetwork	Sewer Network	SewerPipe, Appurtenance (if included in a sewer network)	Sewer Network
US.ThermalNetwork	Thermal Network	ThermalPipe, Appurtenance (if included in a thermal network)	Thermal Network
US.WaterNetwork	Water Network	WaterPipe, Appurtenance (if included in a water network)	Water Network

Layer Name	Layer Title	Spatial object type(s)	Keywords
US. <CodeListValue> ^[26] <i>Example:</i> <i>US.PoliceService</i>	<human readable name> <i>Example: Police Service</i>	GovernmentalService (<i>serviceType:</i> <i>ServiceTypeValue</i>)	POI, Governmental Service, Administrative Service.
US.EnvironmentalMan agementFacility	Environemental Management Facility	EnvironmentalManage mentFacility	Treatment Plant, Incineration Plant, Landfill, Biogas Plant, Classification Plant

NOTE The table above contains several layers for the spatial object type GovernmentalService, which can be further classified using a code list-valued attribute. Such sets of layers are specified as described in Article 14(3) of the IRs.

IR Requirement

Article 14

Portrayal

(...)

3. For spatial object types whose objects can be further classified using a code list-valued attribute, several layers may be defined. Each of these layers shall include the spatial objects corresponding to one specific code list value. In the definition of such sets of layers in Annexes II-IV,
 - a. the placeholder <CodeListValue> shall represent the values of the relevant code list, with the first letter in upper case,
 - b. the placeholder <human-readable name> shall represent the human-readable name of the code list values;
 - c. the spatial object type shall include the relevant attribute and code list, in parentheses;
 - d. one example of a layer shall be given.



11.1.1. Layers organisation

The layer "Utility and governmental services" could be comprised of:

- Administrative and social governmental service;
- Environmental management facility;
- Utility network;
- Electricity network
- Oil, gas & Chemicals network
- Water network
- Sewer network

- Thermal network
- Telecommunications network

Best practices and specific recommendations for administrative and social governmental services:



Recommendation 53

The organisation of layers for administrative and social governmental services shall correspond to the structure of the serviceTypeValue code list.

"correspond to the structure of the serviceTypeValue code list" means, that the layer structure:

- a. contains only upper items (e.g. the main group items) or
- b. (partly) refines the structure of the code list (e.g. regarding types of specialized hospitals) or
- c. is a mixture of a) and b) or
- d. is identical to the structure of the code list.

This recommendation causes an extensive number of layers but is conform to the fact, that the majority of governmental geo-portals contain a very fine-grained layer structure and a large number of layers.

Without any specific mention below, all objects from the "Utility and governmental service" thematic will be represented with the default styles of the portrayal according to their type and geometry.

11.2. Styles required to be supported by INSPIRE view services

11.2.1. Styles for the layer "Administrative and social governmental services"

Best practices and specific recommendations for administrative and social governmental services:

The spatial attribute, which can be used for portrayal of GovernmentalServices is serviceLocation.

The location of the service shall be portrayed as point symbols. Depending on the chosen data type for serviceLocation, the position of the symbol can either be taken directly from a point geometry or can be computed by GIS functionality (e.g. by functions like "centroid" or "pointOnSurface").

The usage of point symbols has some relevant advantages:

- This visualisation suits the "POI-nature" of administrative and social governmental services best.
- The visualisation as point separates the service (scope of INSPIRE theme US), which is provided e.g. inside a building from the building itself (which is under the scope of INSPIRE theme Buildings and is visualised as polygon). The simultaneous representation of the service as a polygon too would create some issues (e.g. interpretation conflicts, missing coherence due to different data sources).

- When dealing with different services being provided from the same site/building (multi-purpose ones) or from neighbour ones, the point representation will make it easier to understand this multiplicity of services, whilst the representation of several overlapping polygons may also cause confusion to the user.

In the example below, the overlapping of different GS data sub-layers on a complex background consisting of a set of different base maps and thematic layers could be rather difficult to understand if all of those services were portrayed as polygons, overlapping with building, street and hydrography polygons.



Figure 17: Example of portrayal of a multiplicity of GS type data over a complex background
 (Source: webEIEL, from Diputación de A Coruña – Spain. <http://www.dicoruna.es/webeiel>)

Recommendation 54



Administrative and social governmental services shall be visualised by point symbols, even if their spatial reference is modelled different from GM_Point.

This specification doesn't provide default styles for the portrayal of spatial data sets corresponding to the sub-theme Administrative and social governmental services. This issue is discussed in Annex E.

To avoid misinterpretations by the users, it is proposed to have a fine-grained layer resolution (see clause 11.1) and layer structure (see clause 11.1.1). The GetFeatureInfo operation [ISO 19128] (see Recommendation 22) will additionally help users to interpret different symbols from different data providers.

11.2.2. Styles for the layer "Environmental Management Facilities"

Style Name	US.EnvironmentalManagementInstallation.Default
Default Style	yes
Style Title	Environmental Management Facility – Installation Style
Style Abstract	Point geometries are rendered as a triangle with a size of 5 pixels, with a 50% grey (#808080) fill and a black outline
Symbology	<pre> <sld:NamedLayer> <se:Name>US.EnvironmentalManagementInstallation</se:Name> <sld:UserStyle> <se:Name> US.EnvironmentalManagementInstallation </se:Name> <sld:IsDefault>1</sld:IsDefault> <se:FeatureTypeStyle version="1.1.0" xmlns:PS="urn:xinspire: specification:EnvironmentalManagementFacility:3.1"> <se:Description> <se:Title> Environmental Man-agement Facility □ Installation Style </se:Title> <se:Abstract>Point geometries are rendered as a triangle with a size of 5 pixels, with a 50% grey (#808080) fill and a black outline.</se:Abstract> </se:Description> <se:FeatureTypeName>US:EnvironmentalManagementFacility</se:Feat ureTypeName> <se:Rule>US:EnvironmentalManagementFacility.type=□installation□ </se:Rule> <se:PointSymbolizer> <se:Geometry> <ogc:PropertyName>US:geometry</ogc:PropertyName> </se:Geometry> </se:PointSymbolizer> </se:Rule> </se:FeatureTypeStyle> </sld:UserStyle> </sld:NamedLayer> </pre>
Minimum & maximum scales	1:50 000 – 1:20 000
Style Name	US.EnvironmentalManagementSite.Default
Default Style	yes
Style Title	Environmental Management Facility – Site Style

Style Name	US.EnvironmentalManagementInstallation.Default
Style Abstract	<p>Point geometries are rendered as a triangle with a size of 5 pixels, with a 50% grey (#808080) fill and a black outline.</p> <p>Line geometries are rendered as a solid black line with a stroke width of 1 pixel.</p> <p>Polygon geometries are rendered using a 50% grey (#808080) fill and a solid black outline with a stroke width of 1 pixel</p>
Symbology	<pre> <sld:NamedLayer> <se:Name>US.EnvironmentalManagementInstallation</se:Name> <sld:UserStyle> <se:Name> US.EnvironmentalManagementInstallation </se:Name> <sld:IsDefault>1</sld:IsDefault> <se:FeatureTypeStyle version="1.1.0" xmlns:PS="urn:xinspire: specification:EnvironmentalManagementFacility:3.1"> <se:Description> <se:Title> Environmental Man-agement Facility □ Installation Style </se:Title> <se:Abstract>Point geometries are rendered as a circle with a size of 7 pixels, with a 50% grey (#808080) fill and a black outline. Line geometries are rendered as a solid black line with a stroke width of 1 pixel. Polygon geometries are rendered using a 50% grey (#808080) fill and a solid black outline with a stroke width of 1pixel.</se:Abstract> </se:Description> <se:FeatureTypeName>US:EnvironmentalManagementFacility</se:Feat ureTypeName> <se:Rule>US:EnvironmentalManagementFacility.type=□site□</se:Rul e> <se:PointSymbolizer> <se:Geometry> <ogc:PropertyName>US:geometry</ogc:PropertyName> </se:Geometry> </se:PointSymbolizer> </se:Rule> </se:FeatureTypeStyle> </sld:UserStyle> </sld:NamedLayer> </pre>
Minimum & maximum scales	1:50 000 – 1:20 000

11.3. Other recommended styles

No other well-defined styles are defined in this specification.

Bibliography

- [DS-D2.3] INSPIRE DS-D2.3, Definition of Annex Themes and Scope, v3.0, http://inspire.jrc.ec.europa.eu/reports/ImplementingRules/DataSpecifications/D2.3_Definition_of_Annex_Themes_and_scope_v3.0.pdf
- [DS-D2.5] INSPIRE DS-D2.5, Generic Conceptual Model, v3.4rc2, http://inspire.jrc.ec.europa.eu/documents/Data_Specifications/D2.5_v3.4rc2.pdf
- [DS-D2.6] INSPIRE DS-D2.6, Methodology for the development of data specifications, v3.0, http://inspire.jrc.ec.europa.eu/reports/ImplementingRules/DataSpecifications/D2.6_v3.0.pdf
- [DS-D2.7] INSPIRE DS-D2.7, Guidelines for the encoding of spatial data, v3.3rc2, http://inspire.jrc.ec.europa.eu/documents/Data_Specifications/D2.7_v3.3rc2.pdf
- [ISO 19101] EN ISO 19101:2005 Geographic information – Reference model (ISO 19101:2002)
- [ISO 19103] ISO/TS 19103:2005, Geographic information – Conceptual schema language
- [ISO 19107] EN ISO 19107:2005, Geographic information – Spatial schema (ISO 19107:2003)
- [ISO 19108] EN ISO 19108:2005 Geographic information - Temporal schema (ISO 19108:2002)
- [ISO 19111] EN ISO 19111:2007 Geographic information - Spatial referencing by coordinates (ISO 19111:2007)
- [ISO 19115] EN ISO 19115:2005, Geographic information – Metadata (ISO 19115:2003)
- [ISO 19118] EN ISO 19118:2006, Geographic information – Encoding (ISO 19118:2005)
- [ISO 19135] EN ISO 19135:2007 Geographic information – Procedures for item registration (ISO 19135:2005)
- [ISO 19139] ISO/TS 19139:2007, Geographic information – Metadata – XML schema implementation
- [ISO 19157] ISO/DIS 19157, Geographic information – Data quality
- [OGC 06-103r3] Implementation Specification for Geographic Information - Simple feature access – Part 1: Common Architecture v1.2.0

Annex A: Abstract Test Suite - (normative)

Disclaimer

While this Annex refers to the Commission Regulation (EU) No 1089/2010 of 23 November 2010 implementing Directive 2007/2/EC of the European Parliament and of the Council as regards interoperability of spatial data sets and services, it does not replace the legal act or any part of it.

The objective of the Abstract Test Suite (ATS) included in this Annex is to help the conformance testing process. It includes a set of tests to be applied on a data set to evaluate whether it fulfils the requirements included in this data specification and the corresponding parts of Commission Regulation No 1089/2010 (implementing rule as regards interoperability of spatial datasets and services, further referred to as ISDSS Regulation). This is to help data providers in declaring the conformity of a data set to the "degree of conformity, with implementing rules adopted under Article 7(1) of Directive 2007/2/EC", which is required to be provided in the data set metadata according to Commission Regulation (EC) No 2008/1205 (the Metadata Regulation).

Part 1 of this ATS includes tests that provide **input for assessing conformity with the ISDSS regulation**. In order to make visible which requirements are addressed by a specific test, references to the corresponding articles of the legal act are given. The way how the cited requirements apply to US specification is described under the testing method.

In addition to the requirements included in ISDSS Regulation this Technical guideline contains TG requirements too. TG requirements are technical provisions that need to be fulfilled in order to be conformant with the corresponding IR requirement when the specific technical implementation proposed in this document is used. Such requirements relate for example to the default encoding described in section 9. **Part 2** of the ATS presents tests necessary for assessing the **conformity with TG requirements**.

NOTE Conformance of a data set with the TG requirement(s) included in this ATS implies conformance with the corresponding IR requirement(s).

The **ATS is applicable to the data sets that have been transformed** to be made available through INSPIRE download services (i.e. the data returned as a response to the mandatory "Get Spatial Dataset" operation) rather than the original "source" data sets.

The requirements to be tested are grouped in several *conformance classes*. Each of these classes covers a specific aspect: one conformance class contains tests reflecting the requirements on the application schema, another on the reference systems, etc. **Each conformance class is identified by a URI** (uniform resource identifier) according to the following pattern:

<http://inspire.ec.europa.eu/conformance-class/ir/US/<conformance class identifier>>

EXAMPLE 1 The URI <http://inspire.ec.europa.eu/conformance-class/ir/ef/rs> identifies the Reference Systems ISDSS conformance class of the Environmental Monitoring Facilities (EF) data theme.

The results of the tests should be published referring to the relevant conformance class (using its

URI).

When an INSPIRE data specification contains **more than one application schema**, the requirements tested in a conformance class may differ depending on the application schema used as a target for the transformation of the data set. This will always be the case for the application schema conformance class. However, also other conformance classes could have different requirements for different application schemas. In such cases, a separate conformance class is defined for each application schema, and they are distinguished by specific URIs according to the following pattern:

Part 1

<http://inspire.ec.europa.eu/conformance-class/ir/US/<conformance class identifier>/<application schema namespace prefix>>

EXAMPLE 2 The URI <http://inspire.ec.europa.eu/conformance-class/ir/el/as/el-vec> identifies the conformity with the application schema (*as*) conformance class for the Elevation Vector Elements (*el-vec*) application schema.

An overview of the conformance classes and the associated tests is given in the table below.

A.1 Application Schema Conformance Class
A.1.1 Schema element denomination test
A.1.2 Value type test
A.1.3 Value test
A.1.4 Attributes/associations completeness test
A.1.5 Abstract spatial object test
A.1.6 Constraints test
A.1.7 Geometry representation test
A.2 Reference Systems Conformance Class
A.2.1 Datum test
A.2.2 Coordinate reference system test
A.2.3 View service coordinate reference system test
A.2.4 Temporal reference system test
A.2.5 Units of measurements test
A.3 Data Consistency Conformance Class
A.3.1 Unique identifier persistency test
A.3.2 Version consistency test
A.3.3 Life cycle time sequence test
A.3.4 Validity time sequence test
A.3.5 Update frequency test

A.4 Data Quality Conformance Class
A.5 Metadata IR Conformance Class
A.5.1 Metadata for interoperability test
A.6 Information Accessibility Conformance Class
A.6.1 Code list publication test
A.6.2 CRS publication test
A.6.3 CRS identification test
A.7 Data Delivery Conformance Class
A.7.1 Encoding compliance test
A.8 Portrayal Conformance Class
A.8.1 Layer designation test
A.9 Technical Guideline Conformance Class
A.9.1 Multiplicity test
A.9.2 CRS http URI test
A.9.3 Metadata encoding schema validation test
A.9.4 Metadata occurrence test
A.9.5 Metadata consistency test
A.9.6 Encoding schema validation test
A.9.7 Style test

In order to be conformant to a conformance class, a data set has to pass **all** tests defined for that conformance class.

In order to be conformant with the ISDSS regulation the inspected data set needs to be conformant to **all** conformance classes in Part 1. The conformance class for overall conformity with the ISDSS regulation is identified by the URI <http://inspire.ec.europa.eu/conformance-class/ir/US/>.

In order to be conformant with the Technical Guidelines, the dataset under inspection needs to be conformant to all conformance classes included both in Part 1 and 2. Chapter 8 describes in detail how to publish the result of testing regarding overall conformity and conformity with the conformance classes as metadata. The conformance class for overall conformity with the Technical Guidelines is identified by the URI [http://inspire.ec.europa.eu/conformance-class/tg/US/x.y\(z\)](http://inspire.ec.europa.eu/conformance-class/tg/US/x.y(z)).

It should be noted that data providers are not obliged to integrate / decompose the original structure of the source data sets when they deliver them for INSPIRE. It means that a conformant dataset can contain less or more spatial object / data types than specified in the ISDSS Regulation.

A dataset that contains less spatial object and/or data types can be regarded conformant when the corresponding types of the source datasets after the necessary transformations fulfil the requirements set out in the ISDSS Regulation.

A **dataset that contain more spatial object and/or data types** may be regarded as conformant when

- all the spatial object / data types that have corresponding types in the source dataset after the necessary transformations fulfil the requirements set out in the ISDSS Regulation and
- all additional elements of the source model (spatial object types, data types, attributes, constraints and code lists together with their values) do not conflict with any rule defined in the interoperability target specifications defined for any theme within INSPIRE.

The ATS contains a detailed list of abstract tests. It should be noted that some tests in the Application schema conformance class can be automated by utilising xml **schema validation tools**. It should be noted that failing such validation test does not necessary reflect non-compliance to the application schema; it may be the results of erroneous encoding.

Each test in this suit follows the same structure:

- Requirement: citation from the legal texts (ISDSS requirements) or the Technical Guidelines (TG requirements);
- Purpose: definition of the scope of the test;
- Reference: link to any material that may be useful during the test;
- Test method: description of the testing procedure.

According to ISO 19105:2000 all tests in this ATS are basic tests. Therefore, this statement is not repeated each time.

Part 1 - (normative)

Conformity with Commission Regulation No 1089/2010

A.1. Application Schema Conformance Class

Conformance class:

<http://inspire.ec.europa.eu/conformance-class/ir/us/as/us-govserv>

<http://inspire.ec.europa.eu/conformance-class/ir/us/as/us-emf>

<http://inspire.ec.europa.eu/conformance-class/ir/us/as/us-net-common>

<http://inspire.ec.europa.eu/conformance-class/ir/us/as/us-net-el>

<http://inspire.ec.europa.eu/conformance-class/ir/us/as/us-net-ogc>

<http://inspire.ec.europa.eu/conformance-class/ir/us/as/us-net-sw>

<http://inspire.ec.europa.eu/conformance-class/ir/us/as/us-net-th>

<http://inspire.ec.europa.eu/conformance-class/ir/us/as/us-net-wa>

A.1.1. Schema element denomination test

a) Purpose: Verification whether each element of the dataset under inspection carries a name specified in the target application schema(s).

b) Reference: Art. 3 and Art.4 of Commission Regulation No 1089/2010

c) Test Method: Examine whether the corresponding elements of the source schema (spatial object types, data types, attributes, association roles and code lists) are mapped to the target schema with the correct designation of mnemonic names.

NOTE Further technical information is in the Feature catalogue and UML diagram of the application schema(s) in section 5.2.

A.1.2. Value type test

a) Purpose: Verification whether all attributes or association roles use the corresponding value types specified in the application schema(s).

b) Reference: Art. 3, Art.4, Art.6(1), Art.6(4), Art.6(5) and Art.9(1)of Commission Regulation No 1089/2010.

c) Test Method: Examine whether the value type of each provided attribute or association role adheres to the corresponding value type specified in the target specification.

NOTE 1 This test comprises testing the value types of INSPIRE identifiers, the value types of attributes and association roles that should be taken from code lists, and the coverage domains.

NOTE 2 Further technical information is in the Feature catalogue and UML diagram of the application schema(s) in section 5.2.

A.1.3. Value test

a) Purpose: Verify whether all attributes or association roles whose value type is a code list take the values set out therein.

b) Reference: Art.4 (3) of Commission Regulation No 1089/2010.

c) Test Method: When an attribute / association role has a code list as its type, compare the values of each instance with those provided in the application schema. To pass this tests any instance of an attribute / association role

- shall take only values explicitly specified in the code list when the code list's extensibility is "none".
- shall take only a value explicitly specified in the code list or shall take a value that is narrower (i.e. more specific) than those explicitly specified in the application schema when the code list's extensibility is "narrower".

NOTE 1 This test is not applicable to code lists with extensibility "open" or "any".

NOTE 2 When a data provider only uses code lists with narrower (more specific values) this test can be fully performed based on internal information.

A.1.4. Attributes/associations completeness test

a) Purpose: Verification whether each instance of spatial object type and data types include all attributes and association roles as defined in the target application schema.

b) Reference: Art. 3, Art.4(1), Art.4(2), and Art.5(2) of Commission Regulation No 1089/2010.

c) Test Method: Examine whether all attributes and association roles defined for a spatial object type or data type are present for each instance in the dataset.

NOTE 1 Further technical information is in the Feature catalogue and UML diagram of the application schema(s) in section 5.2.

NOTE 2 For all properties defined for a spatial object, a value has to be provided if it exists in or applies to the real world entity – either the corresponding value (if available in the data set maintained by the data provider) or the value of *void*. If the characteristic described by the attribute or association role does not exist in or apply to the real world entity, the attribute or association role does not need to be present in the data set.

A.1.5. Abstract spatial object test

a) Purpose: Verification whether the dataset does NOT contain abstract spatial object / data types defined in the target application schema(s).

b) Reference: Art.5(3) of Commission Regulation No 1089/2010

c) Test Method: Examine that there are NO instances of abstract spatial object / data types in the dataset provided.

NOTE Further technical information is in the Feature catalogue and UML diagram of the application schema(s) in section 5.2.

A.1.6. Constraints test

a) Purpose: Verification whether the instances of spatial object and/or data types provided in the dataset adhere to the constraints specified in the target application schema(s).

b) Reference: Art. 3, Art.4(1), and Art.4(2) of Commission Regulation No 1089/2010.

c) Test Method: Examine all instances of data for the constraints specified for the corresponding spatial object / data type. Each instance shall adhere to all constraints specified in the target application schema(s).

NOTE Further technical information is in the Feature catalogue and UML diagram of the application schema(s) in section 5.2.

A.1.7. Geometry representation test

a) Purpose: Verification whether the value domain of spatial properties is restricted as specified in the Commission Regulation No 1089/2010.

b) Reference: Art.12(1), Annex III Section 6 of Commission Regulation No 1089/2010

c) Test Method: Check whether all spatial properties only use 0, 1 and 2-dimensional geometric objects that exist in the right 2-, 3- or 4-dimensional coordinate space, and where all curve interpolations respect the rules specified in the reference documents.

NOTE Further technical information is in OGC Simple Feature spatial schema v1.2.1 [06-103r4].

A.2. Reference Systems Conformance Class

Conformance class:

<http://inspire.ec.europa.eu/conformanceClass/ir/us/rs>

A.2.1. Datum test

a) Purpose: Verify whether each instance of a spatial object type is given with reference to one of the (geodetic) datums specified in the target specification.

b) Reference: Annex II Section 1.2 of Commission Regulation No 1089/2010

c) Test Method: Check whether each instance of a spatial object type specified in the application schema(s) in section 5 has been expressed using:

- the European Terrestrial Reference System 1989 (ETRS89) within its geographical scope; or
- the International Terrestrial Reference System (ITRS) for areas beyond the ETRS89 geographical scope; or
- other geodetic coordinate reference systems compliant with the ITRS. Compliant with the ITRS means that the system definition is based on the definition of ITRS and there is a well-established and described relationship between both systems, according to the EN ISO 19111.

NOTE Further technical information is given in Section 6 of this document.

A.2.2. Coordinate reference system test

a) Purpose: Verify whether the two- and three-dimensional coordinate reference systems are used as defined in section 6.

b) Reference: Section 6 of Commission Regulation 1089/2010.

c) Test Method: Inspect whether the horizontal and vertical components of coordinates one of the corresponding coordinate reference system has been:

- Three-dimensional Cartesian coordinates based on a datum specified in 1.2 and using the parameters of the Geodetic Reference System 1980 (GRS80) ellipsoid.
- Three-dimensional geodetic coordinates (latitude, longitude and ellipsoidal height) based on a datum specified in 1.2 and using the parameters of the GRS80 ellipsoid.
- Two-dimensional geodetic coordinates (latitude and longitude) based on a datum specified in

1.2 and using the parameters of the GRS80 ellipsoid.

- Plane coordinates using the ETRS89 Lambert Azimuthal Equal Area coordinate reference system.
- Plane coordinates using the ETRS89 Lambert Conformal Conic coordinate reference system.
- Plane coordinates using the ETRS89 Transverse Mercator coordinate reference system.
- For the vertical component on land, the European Vertical Reference System (EVRS) shall be used to express gravity-related heights within its geographical scope. Other vertical reference systems related to the Earth gravity field shall be used to express gravity-related heights in areas that are outside the geographical scope of EVRS.
- For the vertical component in marine areas where there is an appreciable tidal range (tidal waters), the Lowest Astronomical Tide (LAT) shall be used as the reference surface.
- For the vertical component in marine areas without an appreciable tidal range, in open oceans and effectively in waters that are deeper than 200 meters, the Mean Sea Level (MSL) or a well-defined reference level close to the MSL shall be used as the reference surface."
- For the vertical component in the free atmosphere, barometric pressure, converted to height using ISO 2533:1975 International Standard Atmosphere, or other linear or parametric reference systems shall be used. Where other parametric reference systems are used, these shall be described in an accessible reference using EN ISO 19111-2:2012.

NOTE Further technical information is given in Section 6 of this document.

A.2.3. View service coordinate reference system test

- a) Purpose: Verify whether the spatial data set is available in the two dimensional geodetic coordinate system for their display with the INSPIRE View Service.
- b) Reference: Annex II Section 1.4 of Commission Regulation 1089/2010
- c) Test Method: Check that each instance of a spatial object types specified in the application schema(s) in section 5 is available in the two-dimensional geodetic coordinate system

NOTE Further technical information is given in Section 6 of this document.

A.2.4. Temporal reference system test

- a) Purpose: Verify whether date and time values are given as specified in Commission Regulation No 1089/2010.
- b) Reference: Art.11(1) of Commission Regulation 1089/2010
- c) Test Method: Check whether:
 - the Gregorian calendar is used as a reference system for date values;
 - the Universal Time Coordinated (UTC) or the local time including the time zone as an offset from UTC are used as a reference system for time values.

NOTE Further technical information is given in Section 6 of this document.

A.2.5. Units of measurements test

a) Purpose: Verify whether all measurements are expressed as specified in Commission Regulation No 1089/2010.

b) Reference: Art.12(2) of Commission Regulation 1089/2010

c) Test Method: Check whether all measurements are expressed in SI units or non-SI units accepted for use with the International System of Units.

NOTE 1 Further technical information is given in ISO 80000-1:2009.

NOTE 2 Degrees, minutes and seconds are non-SI units accepted for use with the International System of Units for expressing measurements of angles.

A.3. Data Consistency Conformance Class

<http://inspire.ec.europa.eu/conformance-class/ir/us/dc/us-govserv>

<http://inspire.ec.europa.eu/conformance-class/ir/us/dc/us-emf>

<http://inspire.ec.europa.eu/conformance-class/ir/us/dc/us-net-common>

<http://inspire.ec.europa.eu/conformance-class/ir/us/dc/us-net-el>

<http://inspire.ec.europa.eu/conformance-class/ir/us/dc/us-net-ogc>

<http://inspire.ec.europa.eu/conformance-class/ir/us/dc/us-net-sw>

<http://inspire.ec.europa.eu/conformance-class/ir/us/dc/us-net-th>

<http://inspire.ec.europa.eu/conformance-class/ir/us/dc/us-net-wa>

A.3.1. Unique identifier persistency test

a) Purpose: Verify whether the namespace and localId attributes of the external object identifier remain the same for different versions of a spatial object.

b) Reference: Art. 9 of Commission Regulation 1089/2010.

c) Test Method: Compare the namespace and localId attributes of the external object identifiers in the previous version(s) of the dataset with the namespace and localId attributes of the external object identifiers of current version for the same instances of spatial object / data types; To pass the test, neither the namespace, nor the localId shall be changed during the life-cycle of a spatial object.

NOTE 1 This test can be performed exclusively on the basis of the information available in the database of the data providers.

NOTE 2 When using URI this test includes the verification whether no part of the construct has been changed during the life cycle of the instances of spatial object / data types.

NOTE 3 Further technical information is given in section 14.2 of the INSPIRE Generic Conceptual Model.

A.3.2. Version consistency test

a) Purpose: Verify whether different versions of the same spatial object / data type instance belong

to the same type.

b) Reference: Art. 9 of Commission Regulation 1089/2010.

c) Test Method: Compare the types of different versions for each instance of spatial object / data type

NOTE 1 This test can be performed exclusively on the basis of the information available in the database of the data providers.

A.3.3. Life cycle time sequence test

a) Purpose: Verification whether the value of the attribute beginLifespanVersion refers to an earlier moment of time than the value of the attribute endLifespanVersion for every spatial object / object type where this property is specified.

b) Reference: Art.10(3) of Commission Regulation 1089/2010.

c) Test Method: Compare the value of the attribute beginLifespanVersion with attribute endLifespanVersion. The test is passed when the beginLifespanVersion value is before endLifespanVersion value for each instance of all spatial object/data types for which this attribute has been defined.

NOTE 1 This test can be performed exclusively on the basis of the information available in the database of the data providers.

A.3.4. Validity time sequence test

a) Purpose: Verification whether the value of the attribute validFrom refers to an earlier moment of time than the value of the attribute validTo for every spatial object / object type where this property is specified.

b) Reference: Art.12(3) of Commission Regulation 1089/2010.

c) Test Method: Compare the value of the attribute validFrom with attribute validTo. The test is passed when the validFrom value is before validTo value for each instance of all spatial object/data types for which this attribute has been defined.

NOTE 1 This test can be performed exclusively on the basis of the information available in the database of the data providers.

A.3.5. Update frequency test

a) Purpose: Verify whether all the updates in the source dataset(s) have been transmitted to the dataset(s) which can be retrieved for the US using INSPIRE download services.

b) Reference: Art.8 (2) of Commission Regulation 1089/2010.

c) Test Method: Compare the values of beginning of life cycle information in the source and the target datasets for each instance of corresponding spatial object / object types. The test is passed when the difference between the corresponding values is less than 6 months.

NOTE 1 This test can be performed exclusively on the basis of the information available in the database of the data providers.

A.4. Data Quality Conformance Class

Conformance class:

<http://inspire.ec.europa.eu/conformance-class/ir/us/dq>

A.5. Metadata IR Conformance Class

Conformance class:

<http://inspire.ec.europa.eu/conformance-class/ir/us/md>

A.5.1. Metadata for interoperability test

a) Purpose: Verify whether the metadata for interoperability of spatial data sets and services described in 1089/2010 Commission Regulation have been created and published for each dataset related to the US data theme.

b) Reference: Art.13 of Commission Regulation 1089/2010

c) Test Method: Inspect whether metadata describing the coordinate reference systems, encoding, topological consistency and spatial representation type have been created and published. If the spatial data set contains temporal information that does not refer to the default temporal reference system, inspect whether metadata describing the temporal reference system have been created and published. If an encoding is used that is not based on UTF-8, inspect whether metadata describing the character encoding have been created.

NOTE Further technical information is given in section 8 of this document.

A.6. Information Accessibility Conformance Class

Conformance class:

<http://inspire.ec.europa.eu/conformance-class/ir/us/ia>

A.6.1. Code list publication test

a) Purpose: Verify whether all additional values used in the data sets for attributes, for which narrower values or any other value than specified in Commission Regulation 1089/2010 are allowed, are published in a register.

b) Reference: Art.6(3)

b) Reference: Art.6(3) and Annex III Section 6

c) Test method: For each additional value used in the data sets for code list-valued attributes, check

whether it is published in a register.

NOTE Further technical information is given in section 5 of this document.

A.6.2. CRS publication test

a) Purpose: Verify whether the identifiers and the parameters of coordinate reference system are published in common registers.

b) Reference: Annex II Section 1.5

c) Test method: Check whether the identifier and the parameter of the CRS used for the dataset are included in a register. .

NOTE Further technical information is given in section 6 of this document.

A.6.3. CRS identification test

a) Purpose: Verify whether identifiers for other coordinate reference systems than specified in Commission Regulation 1089/2010 have been created and their parameters have been described according to EN ISO 19111 and ISO 19127.

b) Reference: Annex II Section 1.3.4

c) Test method: Check whether the register with the identifiers of the coordinate reference systems is accessible.

NOTE Further technical information is given in section 6 of this document.

A.7. Data Delivery Conformance Class

Conformance class:

<http://inspire.ec.europa.eu/conformance-class/ir/us/de>

A.7.1. Encoding compliance test

a) Purpose: Verify whether the encoding used to deliver the dataset comply with EN ISO 19118.

b) Reference: Art.7 (1) of Commission Regulation 1089/2010.

c) Test Method: Follow the steps of the Abstract Test Suit provided in EN ISO 19118.

NOTE 1 Datasets using the default encoding specified in Section 9 fulfil this requirement.

NOTE 2 Further technical information is given in Section 9 of this document.

A.8. Portrayal Conformance Class

Conformance class:

A.8.1. Layer designation test

a) Purpose: verify whether each spatial object type has been assigned to the layer designated according to Commission Regulation 1089/2010.

b) Reference: Art. 14(1), Art14(2) and Annex II Section 6.

c) Test Method: Check whether data is made available for the view network service using the specified layers respectively:

Layer Name	Layer Title	Spatial object type
US.UtilityNetwork	Utility Network	Appurtenance, Manhole, Tower, Pole, Cabinet, Duct, Pipe
US.ElectricityNetwork	Electricity Network	Electricity Cable, Appurtenance (if included in an electricity network)
US. OilGasChemicalsNetwork	Oil, Gas or Chemicals Network	OilGasChemicalsPipe, Appurtenance (if included in an oil, gas or chemicals network)
US.SewerNetwork	Sewer Network	SewerPipe, Appurtenance (if included in a sewer network)
US.ThermalNetwork	Thermal Network	ThermalPipe, Appurtenance (if included in a thermal network)
US.WaterNetwork	Water Network	WaterPipe, Appurtenance (if included in a water network)
US. <CodeListValue> ^[28]	<human readable name>	GovernmentalService
<i>Example: US.PoliceService</i>	<i>Example: Police Service</i>	<i>(serviceType: ServiceTypeValue)</i>
US.EnvironmentalManagement Facility	Environemental Management Facility	EnvironmentalManagementFacility

NOTE Further technical information is given in section 11 of this document.

Part 2 - (informative)

Conformity with the technical guideline (TG) Requirements

A.9. Technical Guideline Conformance Class

Conformance class:

<http://inspire.ec.europa.eu/conformanceClass/tg/us/us-govserv>

<http://inspire.ec.europa.eu/conformanceClass/tg/us/us-emf>

<http://inspire.ec.europa.eu/conformanceClass/tg/us/us-net-common>

<http://inspire.ec.europa.eu/conformanceClass/tg/us/us-net-el>

<http://inspire.ec.europa.eu/conformanceClass/tg/us/us-net-ogc>

<http://inspire.ec.europa.eu/conformanceClass/tg/us/us-net-sw>

<http://inspire.ec.europa.eu/conformanceClass/tg/us/us-net-th>

<http://inspire.ec.europa.eu/conformanceClass/tg/us/us-net-wa>

A.9.1. Multiplicity test

- a) Purpose: Verify whether each instance of an attribute or association role specified in the application schema(s) does not include fewer or more occurrences than specified in section 5.
- b) Reference: Feature catalogue and UML diagram of the application schema(s) in section 5 of this guideline.
- c) Test Method: Examine that the number of occurrences of each attribute and/or association role for each instance of a spatial object type or data type provided in the dataset corresponds to the number of occurrences of the attribute / association role that is specified in the application schema(s) in section 5.

A.9.2. CRS http URI test

- a) Purpose: Verify whether the coordinate reference system used to deliver data for INSPIRE network services has been identified by URIs according to the EPSG register.
- b) Reference: Section 6 of this technical guideline
- c) Test Method: Compare the URI of the dataset with the URIs in the table.

NOTE 1 Passing this test implies the fulfilment of test A6.2

NOTE 2 Further reference please see <http://www.epsg.org/geodetic.html>

A.9.3. Metadata encoding schema validation test

- a) Purpose: Verify whether the metadata follows an XML schema specified in ISO/TS 19139.
- b) Reference: Section 8 of this technical guideline, ISO/TS 19139
- c) Test Method: Inspect whether provided XML schema is conformant to the encoding specified in ISO 19139 for each metadata instance.

NOTE 1 Section 2.1.2 of the Metadata Technical Guidelines discusses the different ISO 19139 XML schemas that are currently available.

A.9.4. Metadata occurrence test

- a) Purpose: Verify whether the occurrence of each metadata element corresponds to those specified in section 8.

b) Reference: Section 8 of this technical guideline

c) Test Method: Examine the number of occurrences for each metadata element. The number of occurrences shall be compared with its occurrence specified in Section 8:

NOTE 1 Section 2.1.2 of the Metadata Technical Guidelines discusses the different ISO 19139 XML schema

A.9.5. Metadata consistency test

a) Purpose: Verify whether the metadata elements follow the path specified in ISO/TS 19139.

b) Reference: Section 8 of this technical guideline, ISO/TS 19139

c) Test Method: Compare the XML schema of each metadata element with the path provide in ISO/TS 19137.

NOTE 1 This test does not apply to the metadata elements that are not included in ISO/TS 19139.

A.9.6. Encoding schema validation test

a) Purpose: Verify whether the provided dataset follows the rules of default encoding specified in section 9 of this document

b) Reference: section 9 of this technical guideline

c) Test Method: Inspect whether provided encoding(s) is conformant to the encoding(s) for the relevant application schema(s) as defined in section 9:

NOTE 1 Applying this test to the default encoding schema described in section 9 facilitates testing conformity with the application schema specified in section 5. In such cases running this test with positive result may replace tests from A1.1 to A1.4 provided in this abstract test suite.

NOTE 2 Using Schematron or other schema validation tool may significantly improve the validation process, because some some complex constraints of the schema cannot be validated using the simple XSD validation process. On the contrary to XSDs Schematron rules are not delivered together with the INSPIRE data specifications. Automating the process of validation (e.g. creation of Schematron rules) is therefore a task and an opportunity for data providers.

A.9.7. Style test

a) Purpose: Verify whether the styles defined in section 11.2 have been made available for each specified layer.

b) Reference: section 11.2.

c) Test Method: Check whether the styles defined in section 11.2 have been made available for each specified layer.

Annex B: Use cases - (informative)

This annex describes the use cases that were used as a basis for the development of this data specification:

As mentioned in Annex E of the "Data Specifications" Methodology for the development of data specifications", the TWG-US identified several use cases for some sub-themes that are hereunder referenced, or detailed within the checklist framework presented in another Annex (i.e. Annex C Check Lists for Data Interoperability").

B.1. Use case for "Utility networks"

B.1.1. Introduction

This document provides a use case of the subtheme "Utility networks" within the INSPIRE theme "Utility and Government services" (US).

This subtheme is described in the INSPIRE Feature Concept Dictionary as follows:

"Utility services/networks: Physical construction for transport of defined products: These may include pipelines for transport of oil, gas, water, sewage or other pipelines. Transmission lines may include electrical, phone, cable-TV or other networks. Transmission lines for both land and at sea/water (bottom) is important. All kinds of transmission systems have nodes and are linked to facilities for production and treatment of different kinds of products. Despite being heavily interlinked, the themes in INSPIRE are treated separately – the production and treatment facilities are treated mainly in the theme production and industrial facilities. Transmission systems may be of different kinds;


- *Oil and gas pipelines: Major lines from oil and gas fields/extraction areas and storage sites. Important production and treatment facilities of such resources is linked to a such a transport network, such as nuclear power stations, power stations, transformer stations and oil tanks. GISCO, Energy/ industry authorities, Companies*
- *Water pipelines: Location of water pipelines – large and local network. Large transmission lines are of interest here. Linked to production facilities for water for consumption/processes. Irrigation lines treated separately under agricultural facilities. Water supply institutions, Utilities/ health*
- *Sewage pipelines: Sewage network, linked to sewerage facilities. Major lines of interest here. Utilities*
- *Transmission lines- electrical: Data set showing larger transmission lines for electricity, both at land and sea. The location of lines is important knowledge for the energy sector itself, land use planners, construction, fisheries for sea cables. Parts of the information important in low flight hindrance databases. Large: national energy/industry institutions. Local authorities, Companies*
- *Transmission lines-phone/ data/cable-TV: Location of phone/ data: Rough data needed in land planning. Important transmission nodes, e.g. antennas, may be seen as part of the network. The cables placement can conflict other natural resource utilization activities, e.g. fisheries. Technical data accuracy for local level Companies*

Rough pipeline and utility service databases exist at European level, e.g. GISCO database with scale

1:1.000.000. Data within countries is non-homogenous. There are examples of national portals warning on construction, distributing maps/data on location of pipelines. At local and regional level the responsibility of government offices or different operators/ firms. In some countries there are national portals for information about cables etc. in construction work."

B.1.2. Use case description: Use case TWG_US_UN_KLIP

Part 1: UML use case diagram

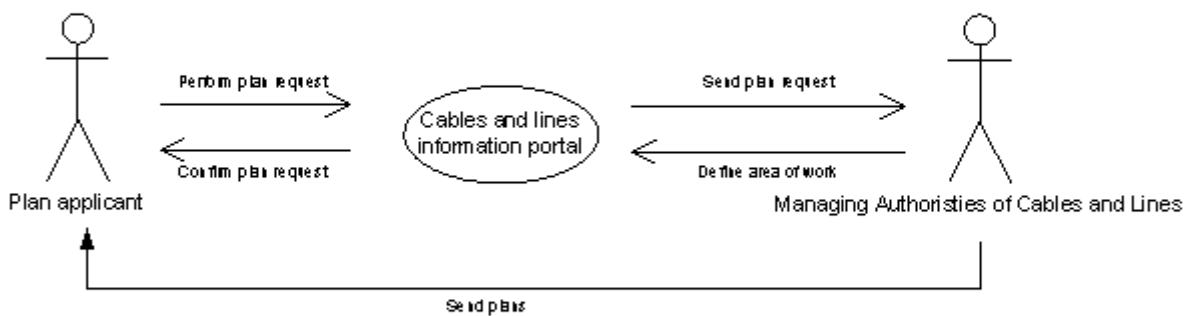

Part 2: Narrative explanation of the use case

The cables and pipes information portal (called KLIP) has been designed to unlock the information concerning cables and pipelines. This information is available with the managing authorities of the cables and pipes. The purpose of the information portal is to avoid excavation damage. Excavation damage may occur when a contractor digs and hits a cable or pipe. When a contractor hits a cable or pipe, this can cause environmental problems. When a sewage pipeline is hit, wastewater can flow into the environment. Also damaging oil, gas and chemical pipelines can cause severe environmental problems. When a water pipeline is hit, drinking water can get contaminated. Damaging an electricity cable poses also a big health risk for the people in the direct neighborhood. Therefore this KLIP portal is very important.

When a contractor plans excavation works he/she sends a plan request to the cables and pipes information portal. The information portal checks which managing authorities of cables and pipes are present in this area, and forwards the request to the managing authorities that are present in the area. This can be managing authorities of oil, gas and chemicals pipelines, water pipelines, sewage pipelines, transmission cables – electrical, telecommunication cables - phone/data/cable tv, etc. - and heating pipelines.

The cables and pipes information portal sends a confirmation to the contractor who asked for the

plans. The managing authority checks if they have indeed cables and/or pipes in the defined area. The relevant plans in this area are selected. The managing authority sends the selected plans by mail. After the contractor has received the plans, he can start the works.

Part 3: Detailed, structured description of the use case

Use Case Description	
Name	Cables and pipes information portal
Priority	<high/medium/low>
Description	This information portal has been designed to unlock the information concerning cables and pipes. This information is available with the managing authorities of the cables and pipes. The purpose of the information portal is to avoid excavation damage.
Pre-condition	The managing authorities of cables and pipes indicate the zones where they manage cables and pipes.
Flow of Events - Basic Path	
Step 1	The contractor goes to the information portal and defines the area of work.
Step 2	The information portal checks which managing authorities of cables and pipes are present in this area and sends a request to these managing authorities.
Step 3	The information portal also sends a confirmation to the contractor.
Step 4	The managing authority checks if they have indeed cables and/or pipes in the defined area. The relevant plans in this area are selected.
Step 5	The managing authority sends the selected plans by mail. After the contractor has received the plans, he can start the works.
Flow of Events - Alternative Paths	
Step 6	In future View Services will be provided instead of paper maps
Post-condition	The contractor can start working in the area of work.
Data source: Oil, gas and chemicals pipelines	

Description	Location of oil, gas and chemicals pipelines
Data provider	Municipalities, private bodies managing the oil, gas and chemicals pipelines
Geographic scope	Europe
Thematic scope	See description
Scale, resolution	Local
Delivery	Map, View Services (map layer)
Documentation	http://klip.agiv.be/Support/Default.aspx
Data source: Water pipelines	
Description	Location of water pipelines
Data provider	Municipalities, private bodies managing the water pipelines
Geographic scope	Europe
Thematic scope	See description
Scale, resolution	Local
Delivery	Map, View Services (map layer)
Documentation	http://klip.agiv.be/Support/Default.aspx
Data source: Sewage pipelines	
Description	Location of sewage pipelines
Data provider	Municipalities, private bodies managing the sewage pipelines
Geographic scope	Europe
Thematic scope	See description
Scale, resolution	Local
Delivery	Map, View Services (map layer)
Documentation	http://klip.agiv.be/Support/Default.aspx
Data source: Heating pipelines	
Description	Location of heating pipelines
Data provider	Municipalities, private bodies managing the heating pipelines
Geographic scope	Europe
Thematic scope	See description
Scale, resolution	Local
Delivery	Map, View Services (map layer)
Documentation	http://klip.agiv.be/Support/Default.aspx

Data source: Electricity cables	
Description	Location of electricity cables
Data provider	Municipalities, private bodies managing the electrical transmission cables
Geographic scope	Europe
Thematic scope	See description
Scale, resolution	Local
Delivery	Map, View Services (map layer)
Documentation	http://klip.agiv.be/Support/Default.aspx
Data source: Telecommunication cables	
Description	Location of phone/data/cable tv transmission cables
Data provider	Municipalities, private bodies managing the phone/data/cable tv transmission cables
Geographic scope	Europe
Thematic scope	See description
Scale, resolution	Local
Delivery	Map, View Services (map layer)
Documentation	http://klip.agiv.be/Support/Default.aspx

B.2. Use case for "Administrative and social governmental services"

B.2.1. Introduction

This documents provides two use cases of the subtheme "Government services" (GS) within the INSPIRE theme "Utility and Government services" (US).

According to (D 2.6, p. 79) the theme and the subtheme respectively is "A very broad INSPIRE theme including different kinds of objects ...".

The subtheme is defined as follows (D 2.6, p. 81):

"Administrative and social governmental services such as public administrations, civil protection, sites, schools, hospitals. The kinds of sites are commonly presented in governmental and municipal portals and map system as "point of interest"-data, and may be point-based location of a variety of categories of municipal and governmental services and social infrastructure.

- police stations
- fire fighter stations
- hospitals

- health care centres
- care centres for the elderly
- schools and kindergartens
- renovation/ waste delivery sites
- government and municipal offices"


The given scope and use examples are (D 2.6, p. 82):

"Administrative and governmental service information is being used by the citizen and public information systems, in government and municipal management actions and in planning. The navigation databases used in cars commonly include such information."

Accordingly to this presetting, the spread of possible use cases is very wide, too. To capture this scope and to gain a basement for the next steps, the subgroup has decided to define first two generic, high level use cases. This two use cases may be refined in further work to fulfill special requirements. It should be mentioned, that the previous requirement survey by the JRC couldn't provide any use case for the subtheme.

B.2.2. Use case TWG_US_GS_Map_case

Part 1: UML use case diagram

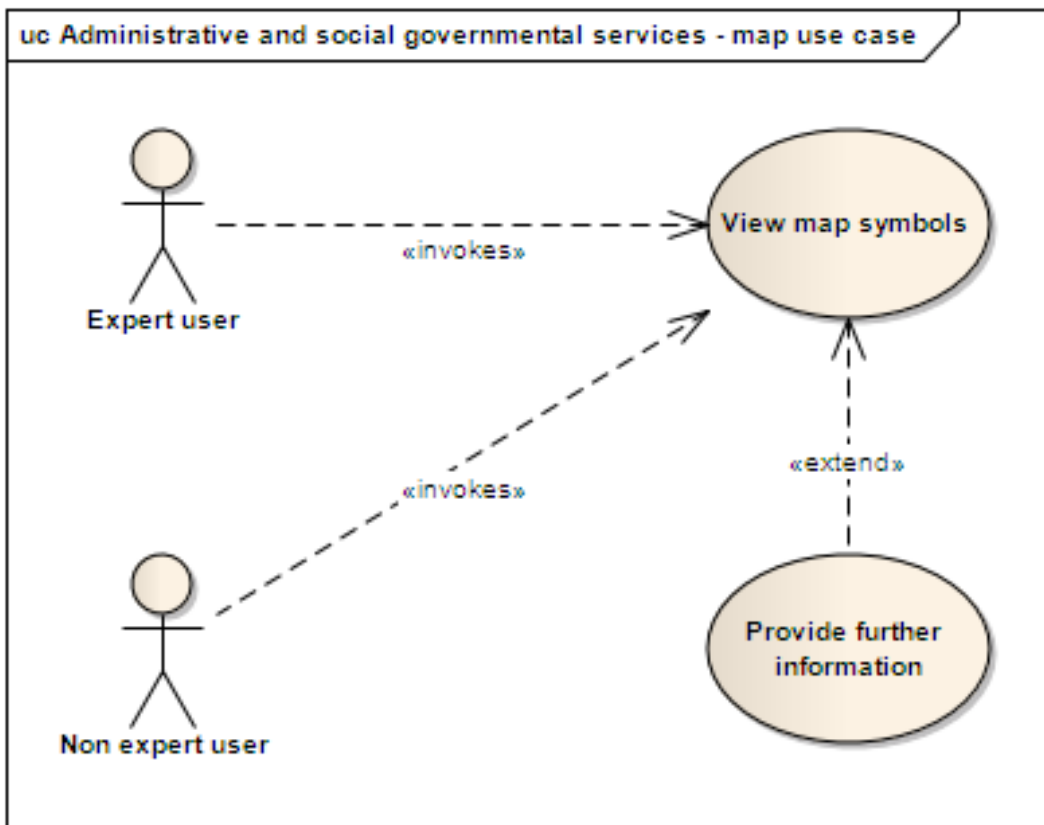

Part 2: Narrative explanation of the use case

The data, which represent the scope, are usually used in governmental and municipal portals. The data are provided as map layers, optional supplemented by some thematic data (WMS GetFeatureInfo operation). The user (actor) searches for the layer using the functionality of a

geoportal, selects the layer, navigates to a location and views ("consumes") the map. POI's are displayed as symbols. The actor can click at a symbol and gets some information to the POI (in case the layer is queryable).

In contrast to the majority of INSPIRE themes, the group of actors is as inhomogeneous as the interfaces they use. It varies from a GI-expert (PAB officer, private planning office staff, ...), who wants to add the layer in its GIS to a layman, who uses a map application on its mobile phone. This diversity is addressed by the functionality of the map clients mainly, but has some influence to the data, too:

- The symbols for the POI's should be easy to understand.
- The map layer metadata should provide a list of keywords, so that the clients are able to support search by laymen (in an emergency case search for "Doctor" should find "Hospital", too).
- A minimum of thematic information is necessary for a lot of use cases in detail (e.g. kind of service, short explanation, contact information, service/office hours, URL, ...). Usually the map applications don't include rich WFS clients, so this information should be provided by the INSPIRE View Service. It has to be mentioned, that the GetFeatureInfo operation is optional in INSPIRE View Services.

The purposes of use are different, but the flows of events are comparable.


Part 3: Detailed, structured description of the use case

Use Case Description	
Name	TWG_US_GS_map_case
Priority	depending on the situation high, medium or low
Description	An actor is searching for a service (including government and municipal offices) for varying purposes and in different situations. The actor wants to get a map layer, wherein the location of the service is marked with a symbol. The actor wants to get some further information about the service.
Pre-condition	The data have to exist and have to be provided by an INSPIRE View Service, preferably with the GetFeatureInfo Interface. The actor uses a map client with a base map.
Flow of Events - Basic Path	
Step 1	The actor accesses to a geoportal.
Step 2	The actor opens a base map and selects a map window (by map navigation, by means of a gazetteer, with the built-in GPS, ...).
Step 3	The actor selects the map layer "Government services" and a subitem (e.g. "Hospitals").

Step 4	The desired layer is added to the map.
Flow of Events - Alternative Paths	
Step 5	By clicking at the symbol some further information about the service are displayed.
Post-condition	none
Data source: POI	
Description	<p>Data about "a variety of categories of municipal and governmental services and social infrastructure." (D 2.3.)</p> <p>This overall use case requires the type/subtype of the POI, its location (given as GM_Point), the core attributes (see above) and some other attributes, depending on the specific use case. A portrayal rule is needed. To support thin GPS devices, the CRS "WGS 84 / plate carrée" should be available.</p> <p>Usually the POI's location originally is given as a reference to an address/building/cadastral parcel. In these cases the reference has to be mapped to coordinates.</p>
Data provider	regions, communes, municipalities, private bodies
Geographic scope	Europe
Thematic scope	see description
Scale, resolution	local
Delivery	INSPIRE View Service (map layer), INSPIRE Download Service (for additional information)
Documentation	Partly in the documentation of the national base maps.

B.2.3. Use case TWG_US_GS_Data_case

Part 1: UML use case diagram

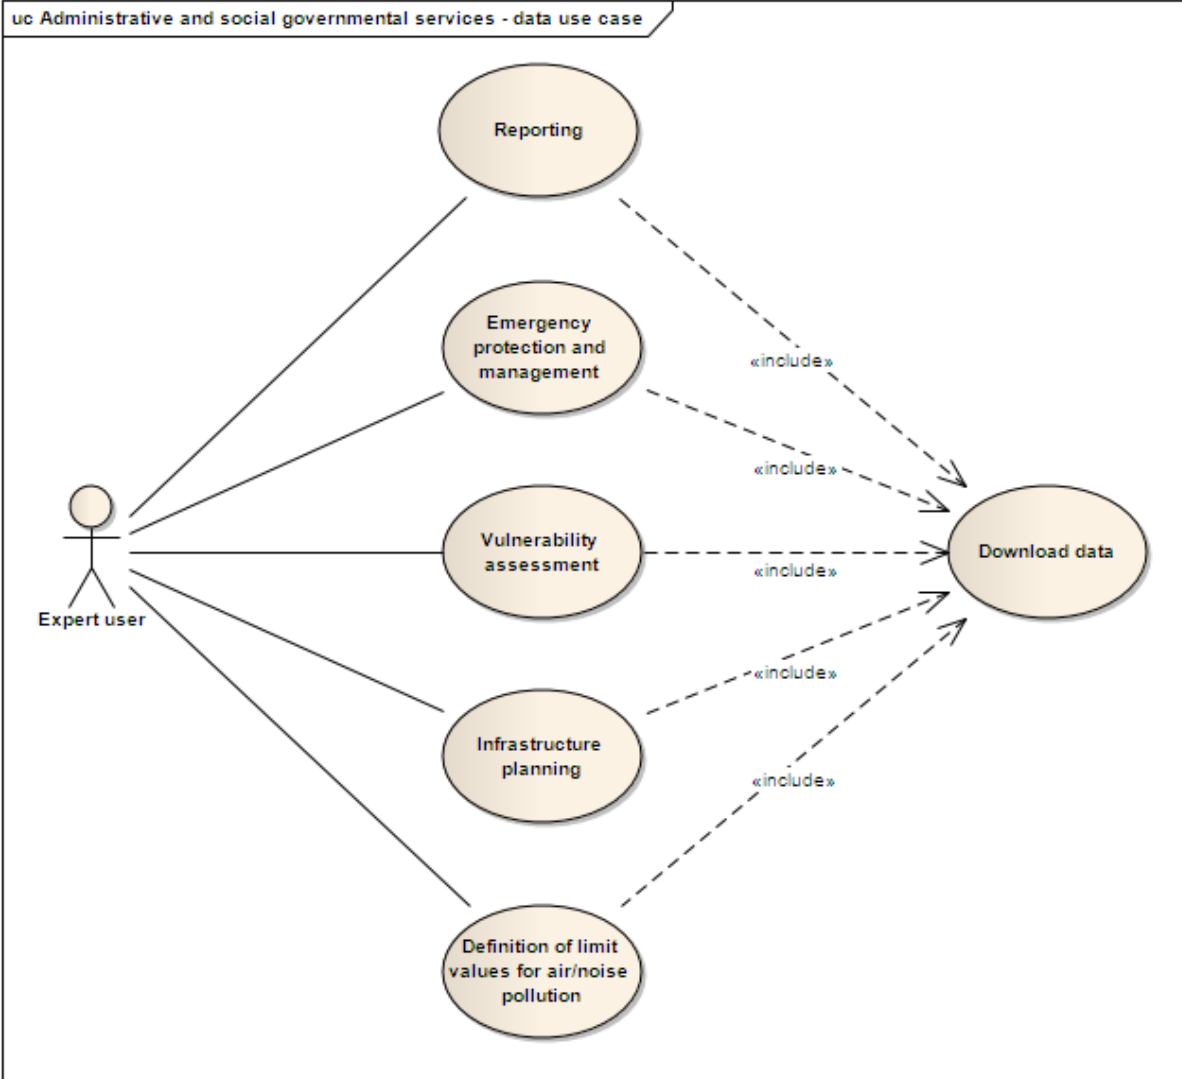

Part 2: Narrative explanation of the use case

Unlike TWG_US_GD_map_case, the actor in this use case is a GIS user. He needs information about a service for varying purposes and in different situations and he wants to import the data into a GIS. Examples are:

- **planning** of governmental services (location allocation)
- **definition of limit values for air pollution**

Some government services (kindergartens, schools and hospitals) can be protected by stricter limit values.

(DIRECTIVE 1999/30/EC of 22 April 1999 relating to limit values for sulphur dioxide, nitrogen dioxide and oxides of nitrogen, particulate matter and lead in ambient air (Article 4): "Whereas the limit values laid down in this Directive are minimum requirements; whereas, in accordance with Article 130t of the Treaty, Member States may maintain or introduce more stringent protective measures; whereas, in particular, stricter limit values may be introduced to protect the health of particularly vulnerable categories of the population, such as children and hospital patients;")

(<http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=CELEX:31999L0030:EN:NOT>)

- **emergency management**

Use case: A hospital/kindergarten/home for the elderly has to be evacuated: Which other facility is adequately equipped to host the people?

- **reporting**

Some governmental services (schools and hospitals) have to be part of noise maps. (Directive 2002/49/EC of the European Parliament and of the Council of 25 June 2002 relating to the assessment and management of environmental noise (Annex IV)) (<http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=CELEX:32002L0049:EN:NOT>)


Part 3: Detailed, structured description of the use case

Use Case Description	
Name	TWG_US_GS_data_case
Priority	depending on the situation high, medium or low
Description	An actor wants to import data about a governmental service into his GIS.
Pre-condition	The data have to exist and have to be provided by an INSPIRE Download Service. The actor uses a GIS.
Flow of Events - Basic Path	
Step 1	Using a Metadata Information System (Catalog), the actor searches, finds and evaluates the data and the corresponding INSPIRE Download Service.
Step 2	The actor uses the INSPIRE Download Service and imports the data in his GIS.
Flow of Events - Alternative Paths	
	none
Post-condition	The actor is able to process the data for his purpose.
Data source: POI	
Description	Data about "a variety of categories of municipal and governmental services and social infrastructure." (D 2.3.) The use case requires the POI as feature data. Although a spatial reference by coordinates is preferable, the reference can be given by a geographic identifier as well. In this case the actor has to use a gazetteer service first.

Data provider	regions, communes, municipalities, private bodies
Geographic scope	Europe
Thematic scope	see description
Scale, resolution	local
Delivery	INSPIRE Download Service
Documentation	Partly in the documentation of the national base maps.

B.2.4. Use Case: SITMAP – Territorial Information System of Málaga Province (Spain)

Part 1: UML use case diagram

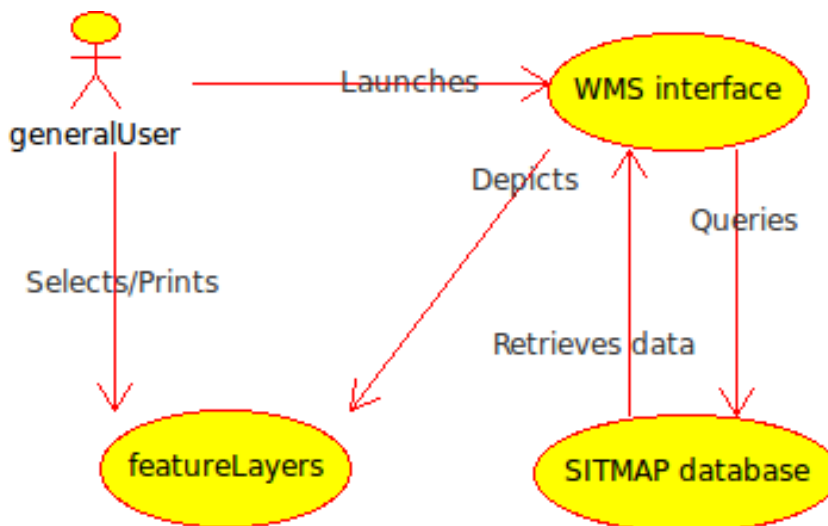

Part 2: Narrative explanation of the use case

SITMAP is the territorial information system that Diputación de Málaga (Málaga Province Council) has developed to both manage its territorial data, Málaga Province municipalities managing those same data and both of them, as well as general users, querying SITMAP database. This latter is the case that we are considering within this document, as it implies the use of web services and interfaces.

Moreover topological data, SITMAP database contains a broad set of data referring to utilities and public services. The contents of that set are basically structured accordingly to EIEL^[29] requirements, as approved by the Spanish Ministry for Territorial Policies and Public Administrations (MPT). Nevertheless, SITMAP database contains also data regarding features which are currently not included within EIEL, but needed by Diputación de Málaga to manage different services. So SITMAP is broader in scope than EIEL.

Thus use case can be considered as a paradigmatic example between all of those that make use of EIEL database as support for local and provincial governments activities managing, namely "BDT-EIEL" from Diputación de A Coruña or "SITMUN" from Diputación de Barcelona.

Part 3: Detailed, structured description of the use case

Use Case Description	
Name	TWG_US_GS_SITMAP
Priority	depending on the situation high, medium or low
Description	<p>An actor (be her a Local Level Public Sector one, a citizen or an employee from a company) is searching for territorial data about utilities and services (including government and municipal offices) for different purposes.</p> <p>The actor wants to access the database, select a feature type (or a given instance of a feature type) and, through the appropriate interface, being able of getting some information about the existence or characteristics of instances location of the features in the database, or about the relationships between given features in different classes (e.g.: distance from schools to main roads, schools in a municipality, etc).</p>
Pre-condition	<p>The data have to exist and have to be provided by means of an OGC compliant Web Mapping Service.</p> <p>The data have to be referenced upon a standard System (WGS84, ED50, ETRS89)</p> <p>The actor uses a map client with a base map.</p>
Flow of Events - Basic Path	
Step 1	The actor accesses to a geoportal.
Step 2	The actor opens a base map and selects a map window (by map navigation, by meaning of a gazetteer, with the built-in GPS, ...).
Step 3a	The actor selects one map layer (e.g. "Utilities") and a sub-item (e.g. "water supply networks").
Step 4	The desired layer is depicted on the map.
Step 5	The actor clicks on a part of the layer and queries it about its attributes
Step 6	The required attributes are shown in a data window
Step 7	The actor prints the so built map, the contents of the data window or both of them
Flow of Events - Alternative Paths	

Step 3b	The actor selects several map layers and sub-items. She may also select layers being provided by third parties (e.g.: Cadastral parcels or orthoimagery) to add them to the base map as reference information.
Step 4b	The desired set of layers are depicted on the map
Step 5b	The actor selects different objects from the active map layers and queries the database about their attributes
Step 6b	The required attributes and the relations between geographical objects are shown in a data window
Step 7	As above
Post-condition	none
Data source: Multi-geometry	
Description	Data about "a variety of categories of municipal and governmental services and social infrastructure." (D 2.3.) This use case, given that it refers to local scales/resolutions, requires different kinds of geometries to represent the different feature classes, as well as their location (by means of planar or geographic coordinates) and their descriptive attributes.
Data provider	Province Council, municipalities, third parties.
Geographic scope	Province
Thematic scope	see description
Scale, resolution	local
Delivery	INSPIRE View Service (map layer), INSPIRE Download Service (for additional information)
Documentation	TWG US/US_Checklist_UserRequirements_Template_MálagaProvinceCouncil.doc at CIRCA Library/Drafting Team Folders/Data Specifications/Thematic Working Groups/Utility an...ices (US)/TWG US Use cases

B.3. Use case for "Waste Management"

B.3.1. Introduction

Developing Use-Cases is a powerful method for creating information products, which has been

adopted for INSPIRE data specification process. The INSPIRE Methodology for Data Specification Development (D2.6) foresees a user-driven specification method based on use-case development. This approach has been followed during the development of the Annex I Data themes and is now followed by the Annex II and III Thematic Working Groups (TWGs).

Development of common Use-Cases would not only show possible inter-linkages and dependencies among INSPIRE Data themes, they also serve as a real demonstrator of the interoperability of the INSPIRE data specifications.

This document is related with the development, monitoring and disclosure of waste plans developed by different Members States, directly or transferred to Regional Governments, following the requirements established by the Directive **2006/12/EC of the European Parliament and of the Council of 5 April 2006 on waste**. As resume, this establishes the legislative framework for the handling of waste in the Community and the obligation for the member states to draw up waste managements plans as part of it. A more general extract of the Directive and its potential implication

There are several initiatives already accessible that show Geo-referenced information, different thematic covertures linked, as result of the implementation of these plans. Geographical information is also attached to other kind of formats where this plans are described.

Some real examples can be acceded here:

http://www.sepa.org.uk/waste/waste_infrastructure_maps.aspx

<http://www.wicklow.ie/Apps/WicklowBeta/Publications/Environment/WasteManPlan/Final%202006-2011%20Waste%20Management%20Plan%20Volume%203.pdf>

http://www.walesregionalwasteplans.gov.uk/south_west/regional_waste_plan_first_review.html

<http://www.legislation.gov.uk/uksi/2008/314/regulation/6/made>


http://www.devon.gov.uk/index/environment/planning-system/planning_minerals_and_waste/waste_planning/waste_local_plan-2.htm

<http://www.epa.ie/whatwedo/resource/hazardous/>

There are different approaches to this Use Case (definition, management, publication) like is explained.

B.3.2. Use case description: Use case Waste Management Plans and Waste Shipments.

Part 1: UML use case diagram

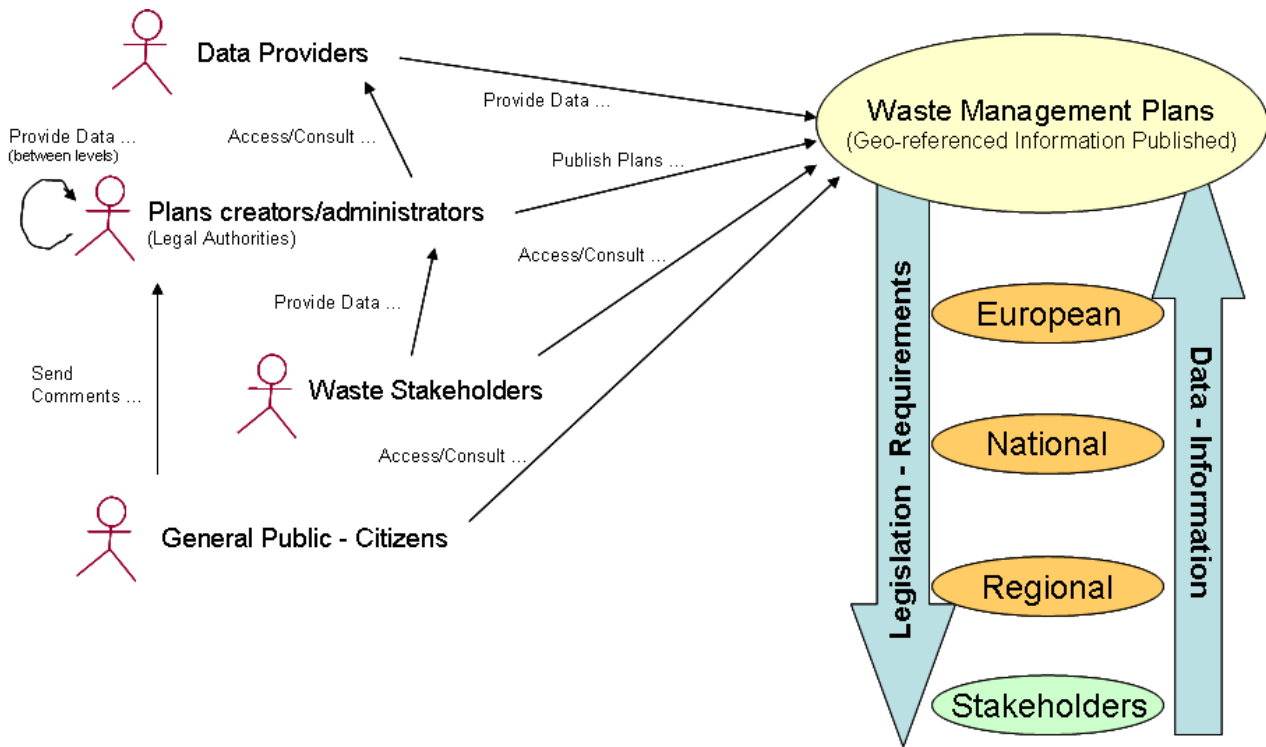

Part 2: Background Legislation

Directive 2008/98/EC sets the basic concepts and definitions related to waste management, such as definitions of waste, recycling, recovery. It explains when waste ceases to be waste and becomes a secondary raw material (so called end-of-waste criteria), and how to distinguish between waste and by-products. The Directive lays down some basic waste management principles: it requires that waste be managed without endangering human health and harming the environment, and in particular without risk to water, air, soil, plants or animals, without causing a nuisance through noise or odours, and without adversely affecting the countryside or places of special interest. Waste legislation and policy of the EU Member States shall apply as a priority order the following waste management hierarchy:

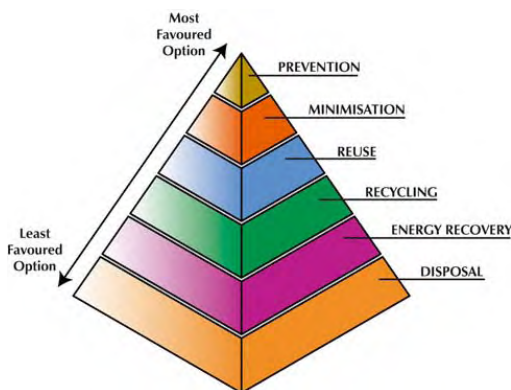


Figure.1 Graphical representation of the Waste Hierarchy (not included on the legal document)

Waste management planning is the cornerstone of any national, regional or local policy on waste management. Indeed, the establishment of a plan allows, taking stock of the existing situation, to define the objectives that need to be met in the future, to formulate appropriate strategies and identify the necessary implementation means.

The drawing up of waste management plans is required by EU legislation on waste. The *Directive 2006/12/EC* on waste sets out the general requirement in Article 7, while specific provisions are laid down with regard to Hazardous waste in Article 6 of Directive *91/689/EEC* and Packaging and Packaging Waste in Article 6 of Directive *94/62/EC*.

Economic growth and globalization have led to a worldwide increase of waste transports across borders, whether on the road, by railway or ship. These waste movements or "shipments" sometimes involve hazardous wastes and can pose potential risks to the human health and the environment: **Regulation (EC) No 1013/2006 of the European Parliament and of the Council of 14 June 2006** on shipments of waste - applicable since 12 July 2007.



Recommendation 55

This information about legal acts was extracted from the European Commission web site. For more detailed information you could visit the original site: <http://ec.europa.eu/environment/waste/index.htm>

Part 3: Main Geo-referenced Contents of Waste Plans

Based on the analysis performed, only have been referred the potential chapters or parts in which geographic information could be included and in consequence described as part of the Use Cases:

The most common administrative level of applicability is at National and Regional. Usually the National level set the guidelines to the Regional and it provides aggregated information of them, following the request of the directive, to be sent to the Commission (Art.35.2)

1. **Regional Overview Description:** This is usually a common chapter for all the projects that take place over a delimited territory. In general is focus to describe the territory covered by the plan from different points of view (Environmental, Physical, Economic, demographic, ...). This involves links with different INSPIRE TWGs in three main ways:

- a. As source of information for the definition of the plan (Art.1.37)
- b. As base reference information to identify the Network over the territory (Art.31)
- c. As reference for the publication of related indicators (Art.35.2)

Examples of information required and related with other TWG that could be included on this chapter is:

+

- Geology - Hydrogeology (Water Quality Management Plans)
 - Groundwater Vulnerability
 - Groundwater Protection Scheme
 - Groundwater Usage
- Hydrography
- Mineral Resources
- Transport Networks Infrastructure

- Road Network
- Rail Network
- Ports
- Utilities and Governmental Services
 - Water Supply
 - Sewerage Treatment Plants
 - Health Care Services
- Population and Settlement
 - Population
 - Household Numbers
- Economic Structure and Activities
 - Agriculture
 - Commercial Activity
 - Industrial Activity
- Statistical Units
 - Waste Production Indicators.
 - Waste Processing Indicators.
- Production and Industrial Facilities.
- Agricultural and Aquaculture Facilities.
 - Land Use
 - Land Cover
 - Restriction Areas
 - Risk Zones.

2. **Waste Inventory:** This part of the Plan should be focus on the source's description and categories of waste that are managed on the areas included under the plan. Potentially should include at least:

Data Sources: following the legislation, information referred to producers of waste is not mandatory depending of the quantity and classification of the waste (Art. 1.15). Anyway some information about it could be provided at different levels of Geographical detail, from Installations (detailed geo-referenced information detailed by activities that generate waste) to Global (at regional level, agglomeration or NUT Region). Different TWG could be related as providers of information.

- Household and Commercial Waste
- Industrial Waste
- Mining Waste
- Agricultural Waste Arising

- Ash and other incineration waste
- Contaminated Soil
- Construction and Demolition Waste
- Healthcare Waste
- Waste Electrical and Electronic Equipment (WEEE)
- Batteries
- Waste Oil
- PCBs
- Tyres
- End of Life Vehicles (ELV's)

Waste Movements

- Inter-Regional Waste Movement
- Exports of waste

All this chapters and descriptions can be linked to geographical entities, from Facilities to Statistical or reporting Areas.

3. **Management Plan:** Chapter focus on the actions to be proposed by the plan in order to improve the related indicators, based on the hierarchy (Infrastructure to be developed, Actions, Improvements...). The definition of these indicators could be related with geographical information from the Statistical point of view.

- Prevention and Minimization
- Recovery/Recycling/Reuse
- Energy Recovery
- Waste Disposal
- Waste Collection
- Sludge Management
- Hazardous Waste
- Waste Planning and Data Collection

4. **Waste Management Arrangements (Network):** Chapter focused on the Waste Collection Facilities and Existing Waste Management Facilities Inventory. It should include apart the geo-referenced location, detailed information about the specific indicators related with the operation and activities that take place on them.

- Bring Sites.
- Recycling Centres.
- Transfer Stations.
- Landfills
- Operational EPA Licensed Waste Management Facilities

- Waste Permitted Facilities
- Licensing of Unauthorised Waste Disposal Site
- Others.

Part 4: Detailed, structured description of the use case

Use-Case: Waste Infrastructure Mapping

Use Case Description	
Name	<p>Generic Waste Infrastructure mapping could be accessible for many different actors from Citizens to European Institutions. It could be required from analytical or reporting purposes to general consultancy information.</p> <p>Actually, this information is provided by several Public Administrations in different supporting formats, generally including some kind of geo-referenced information, and being used for many different purposes.</p>
Priority	High / Medium
Description	<p>A data provider (Generally Public Authority but not exclusively) or modeler will present information about the emplacement of Waste Infrastructures and their related information (Activities, Waste Capacities, Operations,..) in a spatial context to a wider community of potential interested stakeholders.</p>
Pre-condition	<p>The representation of all main waste cycle related elements, from the Socioeconomic of the region to which the plan apply to the position of the Waste facilities (all typologies including landfills or valorization plants) included on the waste network is needed to provide a map for orientation and to understand spatial relationships.</p> <p>Feature classification may be required as reference data or defined rules to choose reference elements (features, dimensions).</p> <p>Portrayal: Generalization and symbols rules for reference data and waste facilities related information</p> <p>Alternatively a set of pre-defined raster data. Reference maps could be specified as context.</p>

Use Case Description	
Flow of Events – Basic Path	
Step 1.	Public Authority defines the purpose of the information to be provided and the Thematic covertures (Bring Sites, Recycling Facilities, Statistical Information, Landfill Locations, Waste Production, Statistical Information about Waste,...).
Step 2	Complementary information: maps (SDI/ view service ...) and for Environmental, Physical and Human related information such as Agglomerations, Urban Planning, Statistical information, Protected Sites, Species Distribution, etc
Step 3	Several objects and thematic covertures are requested by the Waste Plan Manager for reference data at specific resolutions (Name and position of the urban and environmental elements, Production Sites, GIS-layer with topographic elements etc.) and Waste Infrastructures emplaced over the territory. Complementary information and classification criteria are of special relevance.
Step 4	Generalization and symbol assignment rules should be applied, suitability waste infrastructure related information for each purpose should be checked by a competent authority to avoid false statements with respect to conclusions.
Step 5	Data provider delivers requested layers
Step 6	When thematic layers containing the same information from different providers there may be a requirement to manipulate data before merging, analyzing etc. (e.g. recalculation of values, classes)
Flow of Events – Alternative Paths	
Step 3	Request, concurrent with delivery, a pre-defined target data model (e.g. features, values) to support merging, harmonization etc.
Step 4.	Pre-defined reference map selection
Step 5	Delivery of seamless and as far as possible harmonized requested layer

Use Case Description	
Post-condition	Layers coming from different thematic databases should be merged to produce the reference map: e. g. Waste Infrastructures Network level information and verified by a competent authority.
Data source: Thematic information for example relating to environmental aspects	
Description	For example Restricted Areas, Soil, Species Distribution, Land Use.
Data provider	Thematic Data Providers, geo-referenced information should be harmonized.
Geographic scope	Various (Pan-European, cross-border, national, regional, local)
Thematic scope	Useful to answer waste question (related for example with capacity or the nearest places to transfer the waste). Urban Planning.
Scale, resolution	Various (depends on the purpose)
Delivery	GIS-Raster files, GIS-Vector-files, GML-files, WFS
Documentation	Metadata, Model description

Use Case: Waste Plan Definition

Use Case Description

Name

Waste Plans as described in Directive 2006/12/EC.

The different aspects to be described or having into account during the process could be:

- Territory Description: Base information focus on describing the territory covered by the plan from different points of view (Environmental, Physical, Socio-Economic, Demographic, ...). This involves links with different INSPIRE TWGs in two main ways:
 - As source of information for the definition of the plan (Art.1.37)
 - As base reference information to identify the Network over the territory (Art.31)
 - As reference for the publication of related indicators (Art.35.2)
- Waste Infrastructures Inventory: This part of the Plan should be focus on the source's description and categories of waste that are managed on the areas included under the plan.
- Waste Management Arrangements (Network): Chapter focused on the Waste Collection Facilities and Existing Waste Management Facilities Inventory. It should include apart the geo-referenced location, detailed information about the specific indicators related with the activities, permissions and capacities for each of them:

Priority

High

Use Case Description	
Description	<p>For the purposes of the Waste Directive, Waste Plans maps must show the geographic area covered by the plan with the distribution of the Waste Infrastructure (Pass, Actual and Projected) and the potential description of their impact on the environment.</p> <p>The rates of treatment capacity in relation with the amount of waste generated (potentially received) and the operational descriptions.</p> <p>Planning of future scenarios and improvements on the indicators.</p> <p>Background information for spatial orientation is needed.</p> <p>A land use planner may have to refer to these in the definition of an area for development of a certain type relating to Member State planning regulation.</p>
Pre-condition	<p>Collection and composition of basic data (hydrological, environmental data, population, land use, etc); determination of modeling-software (1D, 2D or couplings, 3D)</p> <p>Feature classification as reference data or defined rules to choose reference elements (features, dimensions).</p> <p>Portrayal: Generalisation and symbol assignment rules for reference data and waste infrastructures related information</p> <p>Another possibility could be to have a set of pre-defined reference maps as raster data.</p>
Flow of Events – Basic Path	
Step 1.	Screen, check and analyze existing material (analog and digital information)
Step 2	<p>Describe the Area from different points of view.</p> <p>General Description: Administrative (Socio-Economic) and Geophysical.</p>

Use Case Description	
Step 3	<p>Preliminary Waste Facilities Network: identify databases of registers and unregistered activities that are related with the waste cycle of life. Geo-referenced or not.</p> <p>Identify the Waste Facilities by categories of Waste, Capacity of Process and Technical Installations or Treatments.</p>
Step 4	<p>Calculate the geographical area which could be covert under different scenarios of waste generation. Rates and Statistical information.</p> <p>Evaluation of improvements by different periods based on the Hierarchy established as waste best practices.</p> <p>For each scenario: Prepare alternatives (projection of new Waste Infrastructures, Waste trans-border Movements estimations)</p>
Step 5	Define most appropriate map scale(s), definition of colors, symbols
Step 6	Combine relevant thematic information with topographic reference information to build-up Waste Infrastructures Maps.
Data sources: Legally Required information relating to Waste Plans	
Description	<p>Carried out for different scenarios:</p> <ol style="list-style-type: none"> 1. Authorized registration of actors related with Waste Treatment and transaction of movements derived from the legislation requirements. 2. Statistical Information related with the waste generation capacity in relation with the human activity (industrial, particular consumption, agricultural, ...) 3. Described information in reference with potential entities damaged by the emplacement of this kind of activities.
Data provider	Competent authorities (e.g. Regional Governments, Registered Establishments), Mapping agencies, Meteorological Services
Geographic scope	In terms of INSPIRE: Pan-European, cross-border, national, regional, local

Use Case Description	
Thematic scope	Spatial information supporting Waste Plans developments
Scale, resolution	Generally 1:2.500 – 1.10.000 for detailed maps provided by MS.
Delivery	GIS-Vector files or GML-files, WMS
Documentation	Metadata, model description (it is very important to describe precisely the specification that form the boundary of the simulation used for scenarios because in terms of locations, conditions in the treatment (installations) there are an infinite number of possibilities)
Data source: Topographic Reference Data	
Description	For example Restricted Areas, Soil, Species Distribution, Land Use, Land Cover, Transport and Hydrographic Networks, Statistical Units and Population Distribution, Health and safety.
Data provider	Thematic Data Providers, geo-referenced information should be harmonized.
Geographic scope	Various (Pan-European, cross-border, national, regional, local)
Thematic scope	Useful to define (Public Administration or companies delegated on behalf of them) and communicate Waste Plans definition (Public Administration Web-portals, Documents).
Scale, resolution	Various (depends on the purpose)
Delivery	GIS-Raster files, GIS-Vector-files, GML-files, WFS
Documentation	Metadata, Model description

Use Case: Waste Shipments

Use case description

Name

Regulation (EC) No 1013/2006 of the European Parliament and of the Council of 14 June 2006 on shipments of waste - applicable since 12 July 2007.

This use case was proposed by the European Union Network for the Implementation and Enforcement of Environmental Law (IMPEL), an international non-profit association of the environmental authorities of the EU Member States.

The purpose of the IMPEL-"Waste Sites" project was to exchange information and best practices on identification, inspection and compliance measures regarding upstream waste sites that are relevant for illegal waste exports, and by this to give input to the guidance tools (handbook and field manual) that are to be developed in the course of the project.

Cartography information provided under INSPIRE was pointed out as a very useful tools during the different stages in the project.

Priority

Medium.

Use case description

Description

The last years have seen an increase in problematic waste streams worldwide, notably of electronic waste, end-of-life vehicles and their components from Europe to Africa. Spot checks of waste shipments in transit ports and on motorways in the EU can often do no more than uncover the tip of an iceberg. This situation has prompted waste shipment experts to think more about targeting the sources of illegal waste streams and the "upstream" facilities where such waste is collected, stored and/or treated before its export from the EU.

The main objective of the "Waste Sites" project is to identify good practices and develop a practical guidance tool for the inspection of upstream waste sites, and for the promotion of compliance with waste law on these sites, by competent authorities in the IMPEL member countries. More specifically this means:

- Better understanding of problematic waste streams (especially WEEE, ELVs and their components, plastic waste and a few others) and the role of upstream waste sites in them,
- Exchange of best practices concerning such waste sites,
- Guidance on site identification, inspection and follow-up, in the form of a handbook and a field manual on inspections,
- Better collaboration between relevant agencies (environmental licensing and inspection, police, customs and others) at national and international level.

Distributed access to information related to Waste Sites, could support all the objectives proposed by the project.

Pre-condition

Information should be accessible and detailed metadata information provided in order to guarantee its validity because of the sensible scope to which it would be applied.

Flow of Events – Basic Path

Use case description	
Step 1.	Information about Waste Sites (Emplacement, Treatment Permissions, Process Capacities,..) is collected and served under INSPIRE
Step 2	Transport permissions in which information about origin and destination sites, waste categorizations are requested for waste transport. These documents must be provided by drivers if requested by public authorities on the way (police, border controls, portuary authorities).
Step 3	Based on the information contained on the transport documents, authorities should be able to verify the existence of the origin and destination sites and its correlation with the waste transported and the treatment – management capacity and permission in possession of the Site.
Step 4	<p>Calculate the geographical area that could be covered by different scenarios of waste generation. Rates and Statistical information.</p> <p>Evaluation of improvements by different periods based on the Hierarchy established as waste best practices.</p> <p>For each scenario: Prepare alternatives (projection of new Waste Infrastructures, Waste trans-border Movements estimations)</p>
Data sources: Legally Required information relating to Waste Plans	In terms of INSPIRE: Pan-European, cross-border, national, regional, local
Description	Spatial information supporting Waste Sites
Geographic scope	GIS-Vector files or GML-files, WMS
Data provider	Generally 1:2.500 – 1.10.000 for detailed maps provided by MS.
Thematic scope	Metadata, model description (it is very important to describe precisely the specification that form the boundary of the simulation used for scenarios because in terms of locations, conditions in the treatment (installations) there are an infinite number of possibilities)
Scale, resolution	Generally 1:2.500 – 1.25.000 for detailed maps provided by MS.

Use case description	
Delivery	In the directive there is no specification for Member States, WISE will use Google earth and other free available data
Documentation	
Data source: Topographic Reference Data	
Description	For example Restricted Areas, Soil, Species Distribution, Land Use, Land Cover, Transport and Hydrographic Networks, Statistical Units and Population Distribution, Health and safety.
Geographic scope	Thematic Data Providers, geo-referenced information should be harmonized and periodically updated and maintained.
Data provider	Various (Pan-European, cross-border, national, regional, local)
Thematic scope	Useful to answer waste question (related for example with capacity or the nearest places to transfer the waste). Urban Planning.
Scale, resolution	Various (depends on the purpose)
Delivery	GIS-Raster files, GIS-Vector-files, GML-files, WFS
Documentation	Metadata, Model description

B.3.3. Cross Thematic Data requirements

TWG	Affected?	Datasets affected
Administrative Units (AU)	Yes	<p>Boundaries of administrative units from the cities to regional and national borders, including toponyms.</p> <p>Competent Authorities for waste infrastructures permissions and inspections.</p> <p>Municipalities and Authorities affected by events</p>

TWG	Affected?	Datasets affected
Addresses (AD)	Yes	Address of competent authorities. Address of Waste Infrastructures. Addresses of register producers.
Agricultural and aquacultural facilities (AF)	Yes	Producers registered. Manure Producers, Plastic, Oils, Nitratius, ...
Area management/restriction/regulation zones and reporting units (AM)	Yes	River basin management Units of management, Landfills restrictions,
Atmospheric conditions Meteorological geographical features (AC-MF)	Yes	The design of Waste Water treatment plants and Storm ponds are closely connected with weather forecast systems (severe weather warnings) Incineration Plants location depends of Atmospheric simulations. Landfills are quite susceptible of movements and lixiviation process.
Bio-geographical regions Habitats and biotopes Species distribution (BR-HB-SD)	Yes	with regards to adverse consequences for environment.
Buildings	Yes	Related/included on the Waste Treatment Facilities – Stablishments, Installations.
Cadastral Parcels (CP)	Yes	Identification of Sites related with Facilities/Stablishments/Installations.
Coordinate reference systems	Yes	No specific related requirements. Only as geographical requirement.
Energy Resources	Yes	Reservoirs used for energy generation. Landfill as gas producers.

TWG	Affected?	Datasets affected
Environmental Monitoring Facilities (EMF)	Yes	Noise pollution, Points of Discharges,
Geographical grid systems	?	Population density or similar coverage information
Geographical names (GN)	Yes	name of locations/regions included under the Waste Plan
Geology Mineral resources (GE-MR)	Yes	Permeability Landforms (geomorphology), Applicability to landfill emplacement. Mining Activity: Waste producers.
Human Health and Safety (HH)	Yes	Location of potential detrimental health effects.
Hydrography (HY)	Yes	watercourses, river basins pipelines sewerage systems.
LandCover (LC)	Yes	Small-scale comprehensive land-cover
LandUse (LU)	Yes	residential areas / zones/districts // rural communities asset maps industrial areas asset maps agriculture asset maps
Natural Risk Zones	Yes	Prevention and Selection criteria for the establishment of infrastructures.

TWG	Affected?	Datasets affected
Production and industrial facilities (PF)	Yes	<p>Register of Producers and Activities that handled Specific categories of waste.</p> <p>Very close related information because some activities related with the waste management and processing are included under their scope. (e.g. Recycling).</p>

TWG	Affected?	Datasets affected
Protected Sites (PS)	Yes	<p>cultural heritage</p> <p>protected areas as defined under article 6 and article 7 2000/60/EC respectively article 6 2007/60/EC:</p> <ul style="list-style-type: none"> • Bathing (= bodies of water designated as recreational waters, including areas designated as bathing waters under Directive 76/160/EEC) • Birds (= areas as designated for the protection of wild birds under Directive 2009/147/EC) • Fish (= waterbodies as designated under 2006/44/EC) • Shellfish (= areas as designated under Directive 2006/113/EC of the European Parliament and of the Council of 12 December 2006 on the quality required of shellfish waters (codified version)) • Habitats (= areas as designated for the protection of habitats under Directive 97/62/EC) • Nitrates (=areas as designated under Directive 91/676//EC) • UWWT (=sensitive areas which are subject to eutrophication as identified in Annex II.A(a) of 91/271/EEC) • WFD Art. 7 Abstraction for drinking water (• Other European

TWG	Affected?	Datasets affected
Soil (SO)	Yes	transmissibility, permeability, slack water, drainage. Quite important for Landfills.
Statistical Units Population distribution, demography (SU-PD)	Yes	Publication of global indicator related with Waste treatment. From the production by categories to ratios of processing.
TransportNetwork (TN)	Yes	Transport network assets – road, railroad, . Valid in extension related with the waste transport.
Utility and governmental services (US)	Yes	Water supply Sewerage system Waste Infrastructures and Facilities Managed by governments

Annex C: Code list values - (normative)

C.1. INSPIRE Application Schema 'AdministrativeAndSocialGovernmentalServices'

Code List
<i>ServiceTypeValue</i>

ServiceTypeValue

Name:	service type value
Definition:	Codelist containing a classification of governmental services.
Extensibility:	narrower
Identifier:	http://inspire.ec.europa.eu/codelist/ServiceTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and narrower values defined by data providers.

C.2. INSPIRE Application Schema 'Environmental Management Facilities'

Code List
<i>EnvironmentalManagementFacilityTypeValue</i>

EnvironmentalManagementFacilityTypeValue

Name:	environmental facility classification
Definition:	Classification of environmental facilities, such as into sites and installations.
Extensibility:	narrower
Identifier:	http://inspire.ec.europa.eu/codelist/EnvironmentalManagementFacilityTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and narrower values defined by data providers.

C.3. INSPIRE Application Schema 'Common Utility Network Elements'

Code List
<i>UtilityDeliveryTypeValue</i>
<i>UtilityNetworkTypeValue</i>
<i>WarningTypeValue</i>

UtilityDeliveryTypeValue

Name:	utility delivery type
Definition:	Classification of utility delivery types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/UtilityDeliveryTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

UtilityNetworkTypeValue

Name:	utility network type
Definition:	Classification of utility network types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/UtilityNetworkTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

WarningTypeValue

Name:	warning type
Definition:	Classification of warning types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/WarningTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

C.4. INSPIRE Application Schema 'Electricity Network'

Code List

ElectricityAppurtenanceTypeValue

ElectricityAppurtenanceTypeValue

Name:	electricity appurtenance type
Definition:	Classification of electricity appurtenances.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/ElectricityAppurtenanceTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

C.5. INSPIRE Application Schema 'Oil-Gas-Chemicals Network'

Code List

OilGasChemicalsAppurtenanceTypeValue

OilGasChemicalsProductTypeValue

OilGasChemicalsAppurtenanceTypeValue

Name:	oil, gas and chemicals appurtenance type
Definition:	Classification of oil, gas, chemicals appurtenances.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/OilGasChemicalsAppurtenanceTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

OilGasChemicalsProductTypeValue

Name:	oil, gas and chemicals product type
Definition:	Classification of oil, gas and chemicals products.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/OilGasChemicalsProductTypeValue
Values:	The INSPIRE Registry includes recommended values that may be used by data providers. Before creating new terms, please check if one of them can be used.

C.6. INSPIRE Application Schema 'Sewer Network'

Code List
<i>SewerAppurtenanceTypeValue</i>
<i>SewerWaterTypeValue</i>

SewerAppurtenanceTypeValue

Name:	sewer appurtenance type
Definition:	Classification of sewer appurtenances.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/SewerAppurtenanceTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

SewerWaterTypeValue

Name:	sewer water type
Definition:	Classification of sewer water types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/SewerWaterTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

C.7. INSPIRE Application Schema 'Thermal Network'

Code List

ThermalAppurtenanceTypeValue

ThermalAppurtenanceTypeValue

Name:	thermal appurtenance type value
Definition:	Codelist containing a classification of thermal appurtenances.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/ThermalAppurtenanceTypeValue
Parent:	AppurtenanceTypeValue
Values:	

C.8. INSPIRE Application Schema 'Water Network'

Code List

WaterAppurtenanceTypeValue

WaterTypeValue

WaterAppurtenanceTypeValue

Name:	water appurtenance type
Definition:	Classification of water appurtenances.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/WaterAppurtenanceTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

WaterTypeValue

Name:	water type
Definition:	Classification of water types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/WaterTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers.

Annex D: ServiceTypeValue codelist - (informative)

Note: Items in red originate directly from COFOG

Main group	First level	Second level	COFOG
public administration office			
	general administration office		
	specialized administration office		
public order and safety			GF03
	administration for public order and safety		
	police service		GF0301
	fire-protection service		GF0302
		fire station	
		siren	
		hydrant	
		anti-fire water provision	
		fire detection and observation site	
	rescue service		
		rescue station	
		rescue helicopter landing site	
		marine rescue station	
	civil protection site		
	emergency call point		
	standalone First Aid equipment		
	defence		
		barrack	

Main group	First level	Second level	COFOG
		camp	
environmental protection			GF05
	administration for environmental protection		
	environmental education centre		
health			GF07
	administration for health		
	medical products, appliances and equipment		GF0701
	outpatient service		GF0702
		general medical service	GF070201
		specialized medical services	GF070202
		paramedical service	GF070204
	hospital service		GF0703
		general hospital	
		specialized hospital	
		nursing and convalescent home service	GF070304
	medical and diagnostic laboratory		
education			GF09
	administration for education		
	early childhood education		
	primary education		

Main group	First level	Second level	COFOG
	lower secondary education		
	upper secondary education		
	post-secondary non-tertiary education		GF0903
	short-cycle tertiary education		
	bachelor or equivalent education		
	master or equivalent education		
	doctoral or equivalent education		
	education not elsewhere classified		
	subsidiary services to education		GF0906
social service			GF10
	administration for social protection		
	specialized service of social protection		
	housing		GF1006
	child care service		
	charity and counselling		

Annex E: Checklists for data interoperability - (informative)

As mentioned in Annex F of the ""Data Specifications" Methodology for the development of data specifications", the TWG-US identified several user requirements for some sub-themes that are listed hereunder:

C.1 User requirements for "Utility Networks"

C.1.1 Checklist for Flemish (Belgium) Environment Agency

C.2 User requirements for "Administrative and social governmental services"

C.2.1 Checklist for the Use case TWG_US_GD_map_case (ref. Annex B.1.2)

C.2.2 Checklist for Spanish EIEL Database

C.2.3 Checklist for Málaga (Spain) Province Council

C.2.4 Checklist for French Statistical Environmental Observatory

C.2.5 Checklist for German State's Administrations and Organizations concerned with security issues

C.3 User requirements for "Waste Management"

C.3.1 Checklist for Austrian Environmental Data Management System EDM

C.3.2 Checklist for Piemonte (Italy) Regional Waste Information System

Several tables, based on Annex F of the ""Data Specifications" Methodology for the development of data specifications" framework, have been developed, but due to the size of the current document, such requirement information will not be provided directly within the data specification.

Anyway, interested persons can contact the TWG members to get it if wanted.

Annex F: Portrayal analysis - (informative)

Unfortunately no European-wide accepted standard for map symbolisation exists, which could be applied for the more than 50 different service types of the administrative and social governmental services application schema.

In a bachelor thesis [Kaden 2011[multiblock footnote omitted]] the great diversity of existing symbols in European geoportals and printed maps is shown. Figure E.1 contains some symbols, which are used for the portrayal of police stations:

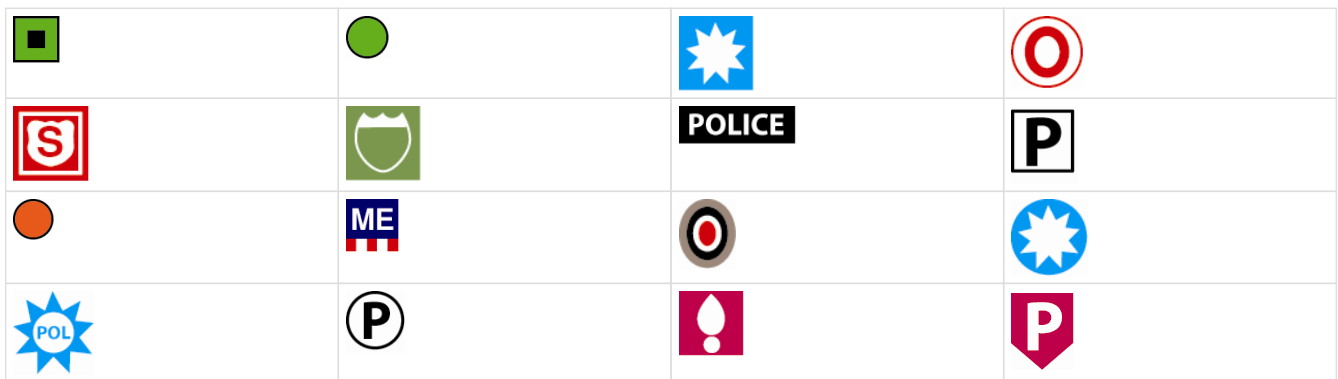


Figure F.1: Map symbols for police stations used in European geoportals and maps (sources see [Kaden 2011])

Based on this survey, the TWG US has abstained from proposing a common style for the subtheme Governmental Services. The provision of a harmonized, widely accepted cartographic symbology of such a broad scope wasn't seen as a realistic aim. Instead of that a fine-grained layer structure according to the items of the ServiceTypeValue code list has been proposed (see chapter 11.1.1).

Annex G: Extended Utility Networks Application Schemas - (informative)

G.1. "Common Extended Utility Networks Elements" application schema

G.1.1. UML Overview

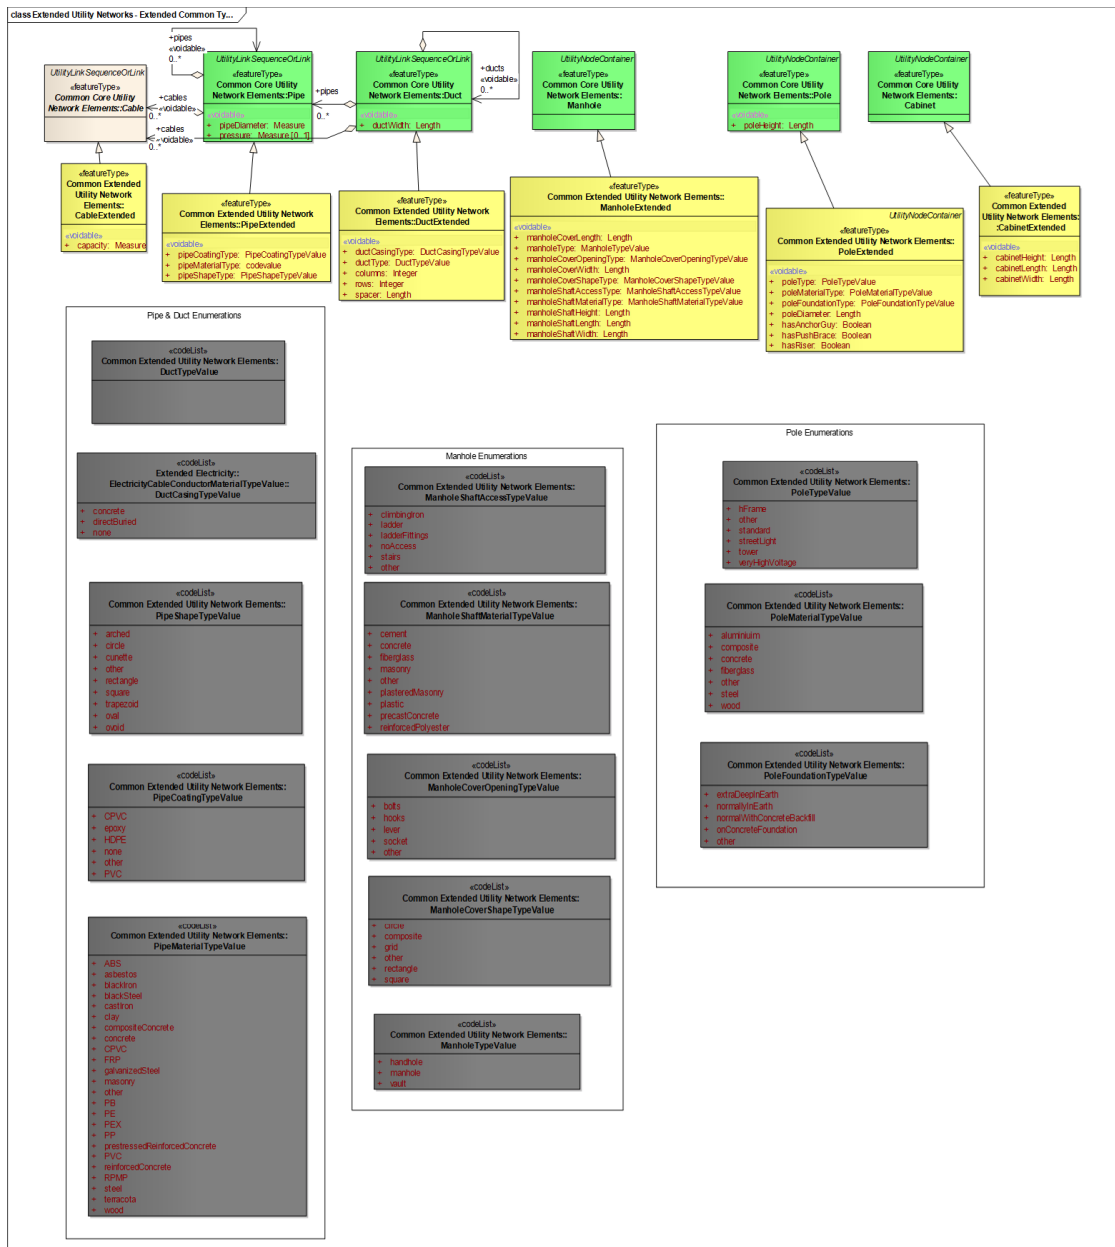


Figure 1 – UML class diagram: Overview of the "Extended Utility Networks - Extended Common Types"

G.1.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Common Extended Utility Network Elements
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>CabinetExtended</i>	Common Extended Utility Network Elements	«featureType»
<i>CableExtended</i>	Common Extended Utility Network Elements	«featureType»
<i>DuctExtended</i>	Common Extended Utility Network Elements	«featureType»
<i>DuctTypeValue</i>	Common Extended Utility Network Elements	«codeList»
<i>ManholeCoverOpeningTypeValue</i>	Common Extended Utility Network Elements	«codeList»
<i>ManholeCoverShapeTypeValue</i>	Common Extended Utility Network Elements	«codeList»
<i>ManholeExtended</i>	Common Extended Utility Network Elements	«featureType»
<i>ManholeShaftAccessTypeValue</i>	Common Extended Utility Network Elements	«codeList»
<i>ManholeShaftMaterialTypeValue</i>	Common Extended Utility Network Elements	«codeList»
<i>ManholeTypeValue</i>	Common Extended Utility Network Elements	«codeList»
<i>PipeCoatingTypeValue</i>	Common Extended Utility Network Elements	«codeList»
<i>PipeExtended</i>	Common Extended Utility Network Elements	«featureType»
<i>PipeMaterialTypeValue</i>	Common Extended Utility Network Elements	«codeList»
<i>PipeShapeTypeValue</i>	Common Extended Utility Network Elements	«codeList»
<i>PoleExtended</i>	Common Extended Utility Network Elements	«featureType»
<i>PoleFoundationTypeValue</i>	Common Extended Utility Network Elements	«codeList»

Type	Package	Stereotypes
<i>PoleMaterialTypeValue</i>	Common Extended Utility Network Elements	«codeList»
<i>PoleTypeValue</i>	Common Extended Utility Network Elements	«codeList»

G.1.2.1. Spatial object types

G.1.2.1.1. CabinetExtended

CabinetExtended	
Name:	Cabinet (Extended)
Subtype of:	Cabinet
Definition:	Extends the Cabinet feature in the Core Utility Network Profile.
Stereotypes:	«featureType»
Attribute: cabinetHeight	
Value type:	Length
Definition:	The height of the cabinet.
Description:	The height is the vertical extend measuring accross the object - in this case, the cabinet - at right angles to the lenght.
Multiplicity:	1
Stereotypes:	«voidable»
Attribute: cabinetLength	
Value type:	Length
Definition:	The lenght of the cabinet.
Description:	Lenght refers to the longest dimension of an object - in this case, the cabinet.
Multiplicity:	1
Stereotypes:	«voidable»

CabinetExtended**Attribute: cabinetWidth**

Value type:	Length
Definition:	The width of the cabinet.
Description:	The measurement of the object - in this case, the cabinet - from side to side.
Multiplicity:	1
Stereotypes:	«voidable»

G.1.2.1.2. CableExtended**CableExtended**

Name:	Cable (Extended)
Subtype of:	Cable
Definition:	Extends the Cable feature in the Core Utility Network Profile.
Stereotypes:	«featureType»

Attribute: capacity

Value type:	Measure
Multiplicity:	1
Stereotypes:	«voidable»

G.1.2.1.3. DuctExtended**DuctExtended**

Name:	Duct (Extended)
Subtype of:	Duct
Definition:	Extends the Duct feature in the Core Utility Network Profile.
Stereotypes:	«featureType»

Attribute: ductCasingType

Value type:	DuctCasingTypeValue
Definition:	Type of the Duct casing.
Multiplicity:	1
Stereotypes:	«voidable»

DuctExtended**Attribute: ductType**

Value type:	DuctTypeValue
Definition:	Type of the Duct.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: columns

Value type:	Integer
Definition:	Number of pipe columns.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: rows

Value type:	Integer
Definition:	Number of pipe rows.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: spacer

Value type:	Length
Definition:	Spacer size, in case there's built-in spacers.
Multiplicity:	1
Stereotypes:	«voidable»

G.1.2.1.4. ManholeExtended**ManholeExtended**

Name:	Manhole (Extended)
Subtype of:	Manhole
Definition:	Extends the Manhole feature in the Core Utility Network Profile.
Stereotypes:	«featureType»

ManholeExtended**Attribute: manholeCoverLength**

Value type:	Length
Definition:	The length of the manhole cover.
Description:	Length refers to the longest dimension of an object - in this case, the manhole cover.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: manholeType

Value type:	ManholeTypeValue
Definition:	Type of the manhole.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: manholeCoverOpeningType

Value type:	ManholeCoverOpeningTypeValue
Definition:	Manhole cover opening.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: manholeCoverWidth

Value type:	Length
Definition:	The width of the manhole cover.
Description:	The measurement of the object - in this case, the manhole cover - from side to side.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: manholeCoverShapeType

Value type:	ManholeCoverShapeTypeValue
Definition:	Manhole cover shape.
Multiplicity:	1
Stereotypes:	«voidable»

ManholeExtended**Attribute: manholeShaftAccessType**

Value type:	ManholeShaftAccessTypeValue
Definition:	Manhole shaft access.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: manholeShaftMaterialType

Value type:	ManholeShaftMaterialTypeValue
Definition:	Manhole shaft material.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: manholeShaftHeight

Value type:	Length
Definition:	Manhole shaft height.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: manholeShaftLength

Value type:	Length
Definition:	Manhole shaft length.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: manholeShaftWidth

Value type:	Length
Definition:	Manhole shaft width.
Multiplicity:	1
Stereotypes:	«voidable»

G.1.2.1.5. PipeExtended

PipeExtended

Name:	Pipe (Extended)
Subtype of:	Pipe
Definition:	Extends the Pipe feature in the Core Utility Network Profile.
Stereotypes:	«featureType»

Attribute: pipeCoatingType

Value type:	PipeCoatingTypeValue
Definition:	Pipe coating.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: pipeMaterialType

Value type:	codevalue
Definition:	Pipe material.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: pipeShapeType

Value type:	PipeShapeTypeValue
Definition:	Pipe shape.
Multiplicity:	1
Stereotypes:	«voidable»

G.1.2.1.6. PoleExtended

PoleExtended	
Name:	Pole (Extended)
Subtype of:	PoleUtilityNodeContainer
Definition:	Extends the Pole feature in the Core Utility Network Profile.
Stereotypes:	«featureType»

PoleExtended**Attribute: poleType**

Value type:	PoleTypeValue
Definition:	Type of the pole.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: poleMaterialType

Value type:	PoleMaterialTypeValue
Definition:	Pole material.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: poleFoundationType

Value type:	PoleFoundationTypeValue
Definition:	Pole foundation type.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: poleDiameter

Value type:	Length
Definition:	Diameter of the pole.
Multiplicity:	1
Stereotypes:	«voidable»

PoleExtended**Attribute: hasAnchorGuy**

Value type:	Boolean
Definition:	Indicates whether a pole has anchor guy.
Description:	<i>An anchor guy</i> is a wire or set of wires running from the top of the pole to an anchor installed in the ground and consists of wires, appropriate fastenings and the anchor. The anchor guy is usually installed at a distance from the pole that is 0.25 to 1.5 of the height of the attachment such that the slope is about 1:1. Sidewalk guys have a horizontal strut that is attached about halfway down the pole to provide pedestrian clearance. The guy runs from the top of the pole to the top of the strut, then down to the anchor.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: hasPushBrace

Value type:	Boolean
Definition:	Indicates whether a pole has push braces.
Description:	<i>Pushbraces</i> support or brace a pole when it is not feasible to use an anchor guy. A pushbrace is a pole or other member that is placed at an angle to help support the unbalanced pole and is often used on the inside curve of mountain roads. The poles that pushbraces support are grouped into classes based on their circumference 6 feet from the butt of the structure.
Multiplicity:	1
Stereotypes:	«voidable»

PoleExtended

Attribute: hasRiser

Value type:	Boolean
Definition:	Indicates whether a pole has risers.
Description:	A <i>riser</i> is a cylindrical or channel enclosure attached to a pole or structure to provide protection for underground conduit as it transitions from overhead to underground.
Multiplicity:	1
Stereotypes:	«voidable»

G.1.2.2. Code lists

G.1.2.2.1. DuctTypeValue

DuctTypeValue	
Name:	Duct type value (Extended)
Definition:	Codelist containing a classification of duct types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/US/DuctTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.2.2. ManholeCoverOpeningTypeValue

ManholeCoverOpeningTypeValue

Name:	Manhole cover opening type value (Extended)
Definition:	Codelist containing a classification of manhole cover opening types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/ManholeCoverOpeningTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.2.3. ManholeCoverShapeTypeValue

ManholeCoverShapeTypeValue	
Name:	Manhole cover shape type value (Extended)
Definition:	Codelist containing a classification of manhole cover shape types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/ManholeCoverShapeTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.2.4. ManholeShaftAccessTypeValue

ManholeShaftAccessTypeValue	
Name:	Manhole shaft access type value (Extended)
Definition:	Codelist containing a classification of manhole shaft access types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/ManholeShaftAccessTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.2.5. ManholeShaftMaterialTypeValue

ManholeShaftMaterialTypeValue	
Name:	Manhole shaft material type value (Extended)
Definition:	Codelist containing a classification of manhole shaft material types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/ManholeShaftMaterialTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.2.6. ManholeTypeValue

ManholeTypeValue	
Name:	Manhole type value (Extended)
Definition:	Codelist containing a classification of manhole types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/ManholeTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.2.7. PipeCoatingTypeValue

PipeCoatingTypeValue	
Name:	Pipe coating type value (Extended)
Definition:	Codelist containing a classification of pipe coating types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/PipeCoatingTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.2.8. PipeMaterialTypeValue

PipeMaterialTypeValue	
Name:	Pipe material type value (Extended)
Definition:	Codelist containing a classification of pipe material types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/PipeMaterialTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.2.9. PipeShapeTypeValue

PipeShapeTypeValue	
Name:	Pipe shape type value (Extended)
Definition:	Codelist containing a classification of pipe shape types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/PipeShapeTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.2.10. PoleFoundationTypeValue

PoleFoundationTypeValue	
Name:	Pole foundation type value (Extended)
Definition:	Codelist containing a classification of pole foundation types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/PoleFoundationTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.2.11. PoleMaterialTypeValue

PoleMaterialTypeValue	
Name:	Pole material type value (Extended)
Definition:	Codelist containing a classification of pole material types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/PoleMaterialTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.2.12. PoleTypeValue

PoleTypeValue	
Name:	Pole type value (Extended)
Definition:	Codelist containing a classification of pole types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/US/PoleTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.1.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

G.1.2.3.1. Boolean

Boolean	
Package:	Truth
Reference:	Geographic information — Conceptual schema language [ISO/TS 19103:2005]

G.1.2.3.2. Cabinet

Cabinet	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	Simple cabinet object which may carry utility objects belonging to either single or multiple utility networks.
Description:	Cabinets represent mountable node objects that can contain smaller utility devices and cables.

G.1.2.3.3. Cable

Cable (abstract)	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A utility link or link sequence used to convey electricity or data from one location to another.

G.1.2.3.4. Duct

Duct	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A utility link or link sequence used to protect and guide cable and pipes via an encasing construction.
Description:	A Duct (or Conduit, or Duct-bank, or Wireway) is a linear object which belongs to the structural network. It is the outermost casing. A Duct may contain Pipe(s), Cable(s) or other Duct(s). Duct is a concrete feature class that contains information about the position and characteristics of ducts as seen from a manhole, vault, or a cross section of a trench and duct.

G.1.2.3.5. DuctCasingTypeValue

DuctCasingTypeValue

Package:	Extended Electricity
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	Type of duct casings.

G.1.2.3.6. Integer

Integer

Package:	Numerics
Reference:	Geographic information — Conceptual schema language [ISO/TS 19103:2005]

G.1.2.3.7. Length

Length

Package:	Units of Measure
Reference:	Geographic information — Conceptual schema language [ISO/TS 19103:2005]

G.1.2.3.8. Manhole

Manhole

Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	Simple container object which may contain either single or multiple utility networks objects.
Description:	

G.1.2.3.9. Measure

Measure

Package:	ProductionAndIndustrialFacilitiesExtension
Reference:	INSPIRE Data specification on Production and Industrial Facilities [DS-D2.8.III.8]
Definition:	Declared or measured quantity of any kind of physical entity.

G.1.2.3.10. Pipe

Pipe	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A utility link or link sequence for the conveyance of solids, liquids, chemicals or gases from one location to another. A pipe can also be used as an object to encase several cables (a bundle of cables) or other (smaller) pipes.

G.1.2.3.11. Pole

Pole	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	Simple pole (mast) object which may carry utility objects belonging to either single or multiple utility networks.
Description:	Poles represent node objects that can support utility devices and cables.

G.1.2.3.12. UtilityNodeContainer

UtilityNodeContainer (abstract)	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A point spatial object which is used for connectivity, and also may contain other spatial objects (not necessarily belonging to the same utility network).
Description:	Nodes are found at either end of the UtilityLink.

G.1.2.3.13. codevalue

codevalue

Package:	EncodingRules
Reference:	Geographic information — Encoding [ISO 19118:2011]

G.2. "Extended Electricity Network" application schema

G.2.1. UML Overview

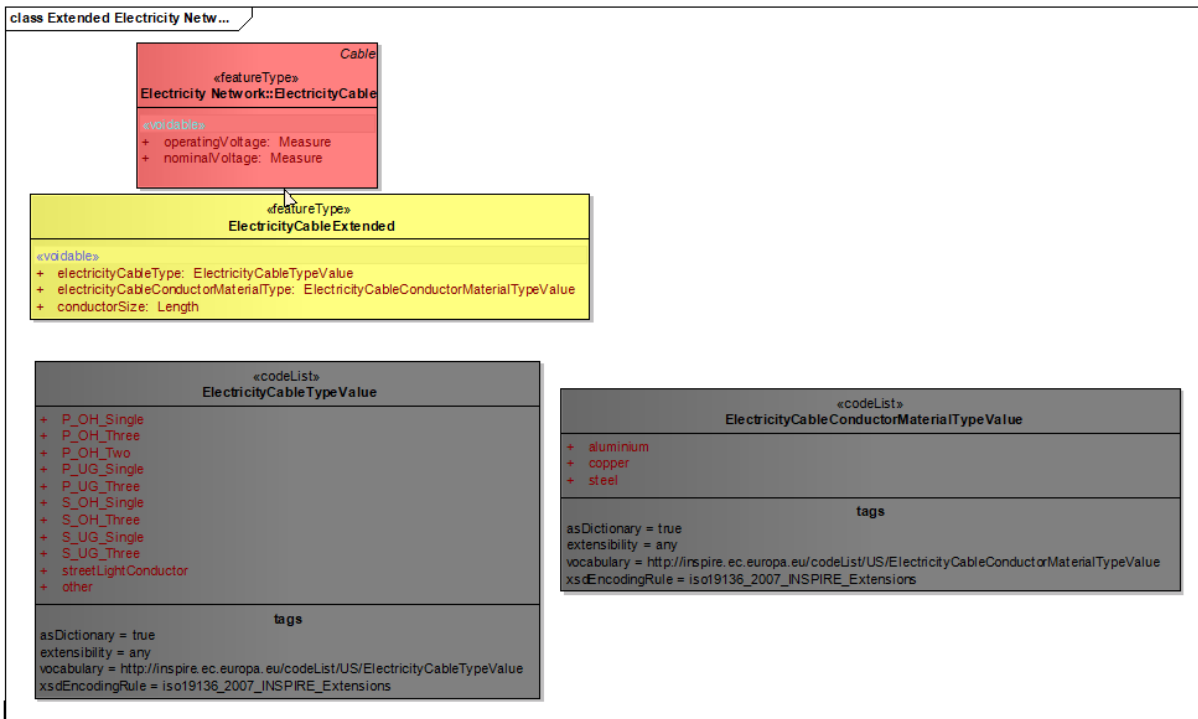


Figure 2 – UML class diagram: Overview of the "Electricity Networks"

G.2.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Extended Electricity
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>ElectricityCableConductorMaterialTypeValue</i>	Extended Electricity	«codeList»
<i>ElectricityCableExtended</i>	Extended Electricity	«featureType»

Type	Package	Stereotypes
<i>ElectricityCableTypeValue</i>	Extended Electricity	«codeList»

G.2.2.1. Spatial object types

G.2.2.1.1. ElectricityCableExtended

ElectricityCableExtended	
Name:	Electricity cable (Extended)
Subtype of:	ElectricityCable
Definition:	Extends the ElectricityCable feature in the Core Utility Network Profile.
Stereotypes:	«featureType»
Attribute: electricityCableType	
Value type:	ElectricityCableTypeValue
Definition:	Type of electricity cable.
Multiplicity:	1
Stereotypes:	«voidable»
Attribute: electricityCableConductorMaterialType	
Value type:	ElectricityCableConductorMaterialTypeValue
Definition:	Cable conductor material type.
Multiplicity:	1
Stereotypes:	«voidable»
Attribute: conductorSize	
Value type:	Length
Definition:	Size of the conductor.
Multiplicity:	1
Stereotypes:	«voidable»

G.2.2.2. Code lists

G.2.2.2.1. ElectricityCableConductorMaterialTypeValue

ElectricityCableConductorMaterialTypeValue

Name:	Electricity cable conductor material type value (Extended)
Definition:	Codelist containing a classification of electricity cable conductor material types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/ElectricityCableConductorMaterialTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.2.2.2.2. ElectricityCableTypeValue

ElectricityCableTypeValue

Name:	Electricity cable type value (Extended)
Definition:	Codelist containing a classification of electricity cable types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/ElectricityCableTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.2.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

G.2.2.3.1. ElectricityCable

ElectricityCable

Package:	Electricity Network
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A utility link or link sequence used to convey electricity from one location to another.

G.2.2.3.2. Length

Length	
Package:	Units of Measure
Reference:	Geographic information — Conceptual schema language [ISO/TS 19103:2005]

G.3. "Extended Oil-Gas-Chemicals Network" application schema

G.3.1. UML Overview

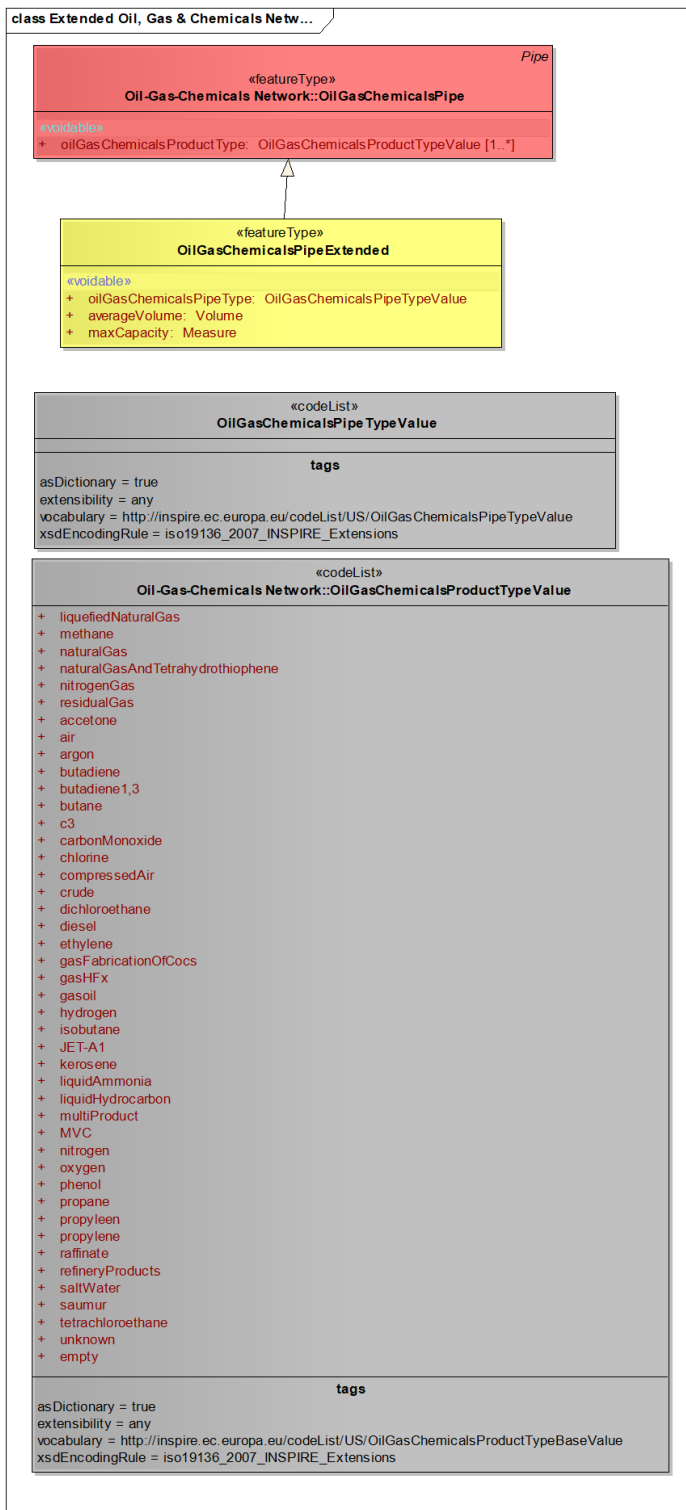


Figure 3 – UML class diagram: Overview of the "Oil-Gas-Chemicals Networks"

G.3.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Extended Oil-Gas-Chemicals
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>OilGasChemicalsPipeExtended</i>	Extended Oil-Gas-Chemicals	«featureType»
<i>OilGasChemicalsPipeTypeValue</i>	Extended Oil-Gas-Chemicals	«codeList»

G.3.2.1. Spatial object types

G.3.2.1.1. OilGasChemicalsPipeExtended

OilGasChemicalsPipeExtended	
Name:	Oil, gas and chemicals pipe (Extended)
Subtype of:	OilGasChemicalsPipe
Definition:	Extends the OilGasChemicalsPipe feature in the Core Utility Network Profile.
Stereotypes:	«featureType»
Attribute: oilGasChemicalsPipeType	
Value type:	OilGasChemicalsPipeTypeValue
Definition:	Type of oil/gas/chemicals pipe.
Multiplicity:	1
Stereotypes:	«voidable»
Attribute: averageVolume	
Value type:	Volume
Definition:	Average volume of the pipe.
Multiplicity:	1
Stereotypes:	«voidable»
Attribute: maxCapacity	
Value type:	Measure
Definition:	Maximum capacity of the pipe.
Multiplicity:	1
Stereotypes:	«voidable»

G.3.2.2. Code lists

G.3.2.2.1. OilGasChemicalsPipeTypeValue

OilGasChemicalsPipeTypeValue

Name:	Oil, gas and chemicals pipe type value (Extended)
Definition:	Codelist containing a classification of oil, gas and chemical pipe types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/OilGasChemicalsPipeTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.3.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

G.3.2.3.1. Measure

Measure	
Package:	ProductionAndIndustrialFacilitiesExtension
Reference:	INSPIRE Data specification on Production and Industrial Facilities [DS-D2.8.III.8]
Definition:	Declared or measured quantity of any kind of physical entity.

G.3.2.3.2. OilGasChemicalsPipe

OilGasChemicalsPipe	
Package:	Oil-Gas-Chemicals Network
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A pipe used to convey oil, gas or chemicals from one location to another.

G.3.2.3.3. Volume

Volume

Package:	Units of Measure
Reference:	Geographic information — Conceptual schema language [ISO/TS 19103:2005]

G.4. "Extended Thermal Network" application schema

G.4.1. UML Overview

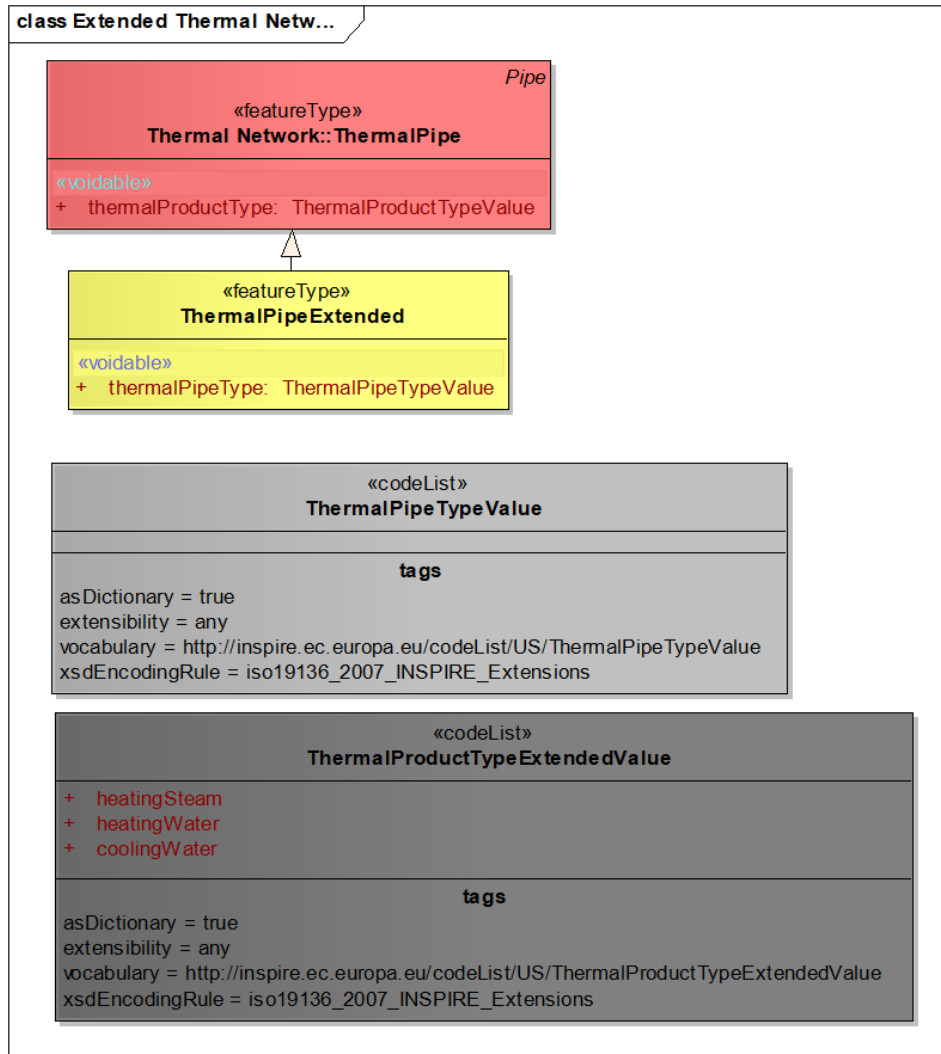


Figure 5 – UML class diagram: Overview of the "Extended Thermal Networks"

G.4.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Extended Thermal
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>ThermalAppurtenanceTypeExtendedValue</i>	Extended Thermal	«codeList»
<i>ThermalPipeExtended</i>	Extended Thermal	«featureType»
<i>ThermalPipeTypeValue</i>	Extended Thermal	«codeList»
<i>ThermalProductTypeExtendedValue</i>	Extended Thermal	«codeList»

G.4.2.1. Spatial object types

G.4.2.1.1. ThermalPipeExtended

ThermalPipeExtended	
Name:	Thermal pipe (Extended)
Subtype of:	ThermalPipe
Definition:	Extends the ThermalPipe feature in the Core Utility Network Profile.
Stereotypes:	«featureType»
Attribute: thermalPipeType	
Value type:	ThermalPipeTypeValue
Definition:	Type of thermal pipe.
Multiplicity:	1
Stereotypes:	«voidable»

G.4.2.2. Code lists

G.4.2.2.1. ThermalAppurtenanceTypeExtendedValue

ThermalAppurtenanceTypeExtendedValue

Name:	Thermal appurtenance type value (Extended)
Definition:	Codelist containing a classification of the extension of thermal appurtenance types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/ThermalAppurtenanceExtendedTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.4.2.2.2. ThermalPipeTypeValue

ThermalPipeTypeValue

Name:	Thermal pipe type value (Extended)
Definition:	Codelist containing a classification of thermal pipe types.
Extensibility:	open
Identifier:	http://inspire.ec.europa.eu/codelist/ThermalPipeTypeValue
Values:	The allowed values for this code list comprise the values specified in the INSPIRE Registry and additional values at any level defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.4.2.2.3. ThermalProductTypeExtendedValue

ThermalProductTypeExtendedValue

Name:	Thermal product type value (Extended)
Definition:	Codelist containing a classification of the extension of thermal product types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/ThermalProductTypeExtendedValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.4.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

G.4.2.3.1. ThermalPipe

ThermalPipe	
Package:	Thermal Network
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A pipe used to disseminate heating or cooling from one location to another.

G.5. "Extended Water Network" application schema

G.5.1. UML Overview

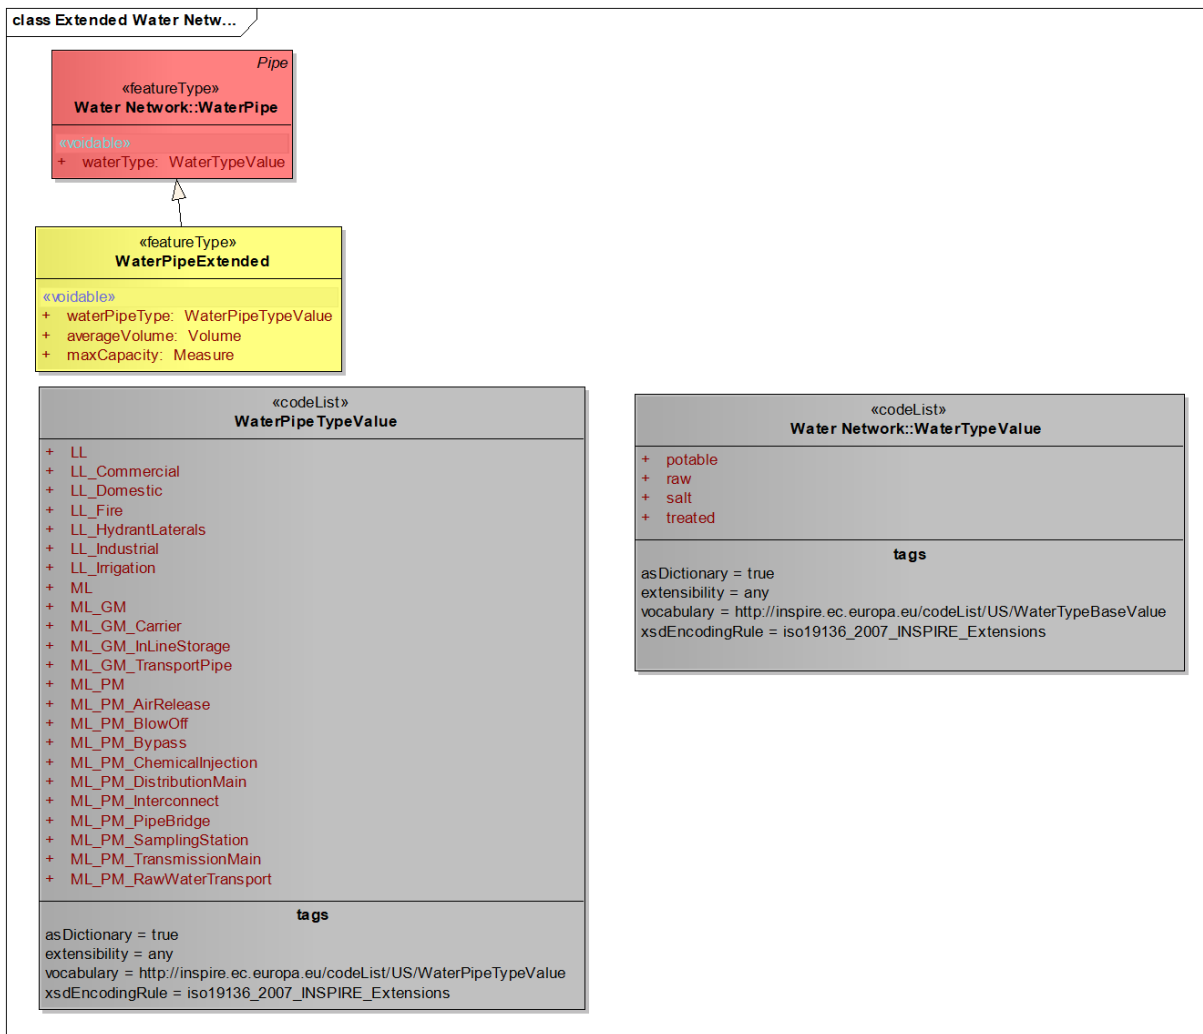


Figure 6 – UML class diagram: Overview of the "Extended Water Networks"

G.5.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Extended Water
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>WaterPipeExtended</i>	Extended Water	«featureType»
<i>WaterPipeTypeValue</i>	Extended Water	«codeList»

G.5.2.1. Spatial object types

G.5.2.1.1. WaterPipeExtended

WaterPipeExtended

Name:	Water pipe (Extended)
Subtype of:	WaterPipe
Definition:	Extends the WaterPipe feature in the Core Utility Network Profile.
Stereotypes:	«featureType»

Attribute: waterPipeType

Value type:	WaterPipeTypeValue
Definition:	Type of water pipe.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: averageVolume

Value type:	Volume
Definition:	Average volume of the pipe.
Multiplicity:	1
Stereotypes:	«voidable»

Attribute: maxCapacity

Value type:	Measure
Definition:	Maximum capacity of the pipe.
Multiplicity:	1
Stereotypes:	«voidable»

G.5.2.2. Code lists

G.5.2.2.1. WaterPipeTypeValue

WaterPipeTypeValue

Name:	Water pipe type value (Extended)
Definition:	Codelist containing a classification of water pipe types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/WaterPipeTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.5.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

G.5.2.3.1. Measure

Measure	
Package:	ProductionAndIndustrialFacilitiesExtension
Reference:	INSPIRE Data specification on Production and Industrial Facilities [DS-D2.8.III.8]
Definition:	Declared or measured quantity of any kind of physical entity.

G.5.2.3.2. Volume

Volume	
Package:	Units of Measure
Reference:	Geographic information — Conceptual schema language [ISO/TS 19103:2005]

G.5.2.3.3. WaterPipe

WaterPipe

Package:	Water Network
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A water pipe used to convey water from one location to another.

G.6. "Extended Sewer Network" application schema

G.6.1. UML Overview

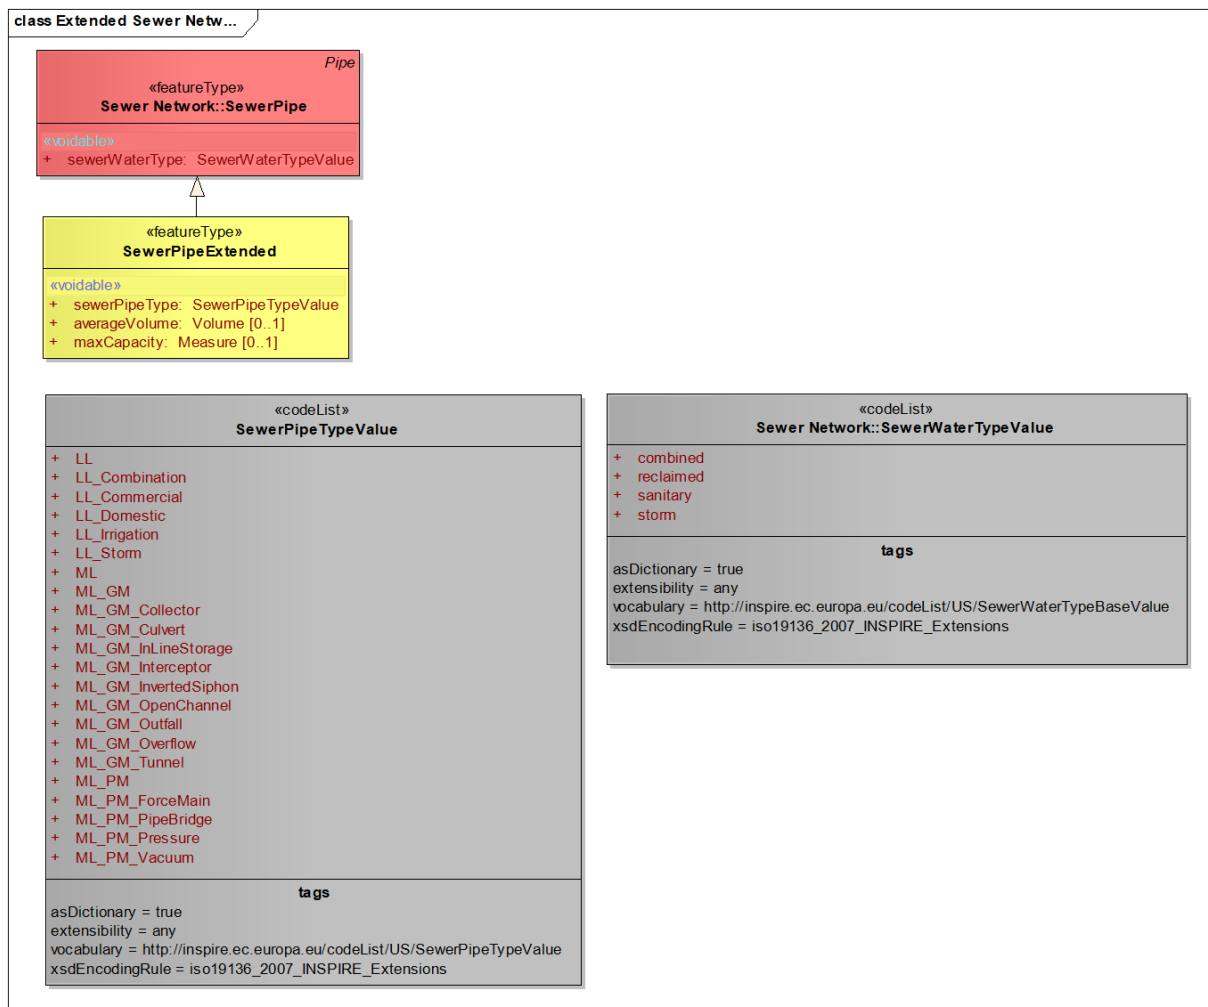


Figure 7 – UML class diagram: Overview of the "Extended Sewer Networks"

G.6.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Extended Sewer
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>SewerPipeExtended</i>	Extended Sewer	«featureType»
<i>SewerPipeTypeValue</i>	Extended Sewer	«codeList»

G.6.2.1. Spatial object types

G.6.2.1.1. SewerPipeExtended

SewerPipeExtended	
Name:	Sewer pipe (Extended)
Subtype of:	SewerPipe
Definition:	Extends the SewerPipe feature in the Core Utility Network Profile.
Stereotypes:	«featureType»
Attribute: sewerPipeType	
Value type:	SewerPipeTypeValue
Definition:	Type of sewer pipe.
Multiplicity:	1
Stereotypes:	«voidable»
Attribute: averageVolume	
Value type:	Volume
Definition:	Average volume of the pipe.
Multiplicity:	0..1
Stereotypes:	«voidable»
Attribute: maxCapacity	
Value type:	Measure
Definition:	Maximum capacity of the pipe.
Multiplicity:	0..1
Stereotypes:	«voidable»

G.6.2.2. Code lists

G.6.2.2.1. SewerPipeTypeValue

SewerPipeTypeValue

Name:	Sewer pipe type value (Extended)
Definition:	Codelist containing a classification of sewer pipe types.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/SewerPipeTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

G.6.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

G.6.2.3.1. Measure

Measure	
Package:	ProductionAndIndustrialFacilitiesExtension
Reference:	INSPIRE Data specification on Production and Industrial Facilities [DS-D2.8.III.8]
Definition:	Declared or measured quantity of any kind of physical entity.

G.6.2.3.2. SewerPipe

SewerPipe	
Package:	Sewer Network
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A sewer pipe used to convey wastewater (sewer) from one location to another.

G.6.2.3.3. Volume

Volume

Package:	Units of Measure
Reference:	Geographic information — Conceptual schema language [ISO/TS 19103:2005]

Annex H: "Telecommunications Network" Application Schema - (informative)

H.1. UML Overview

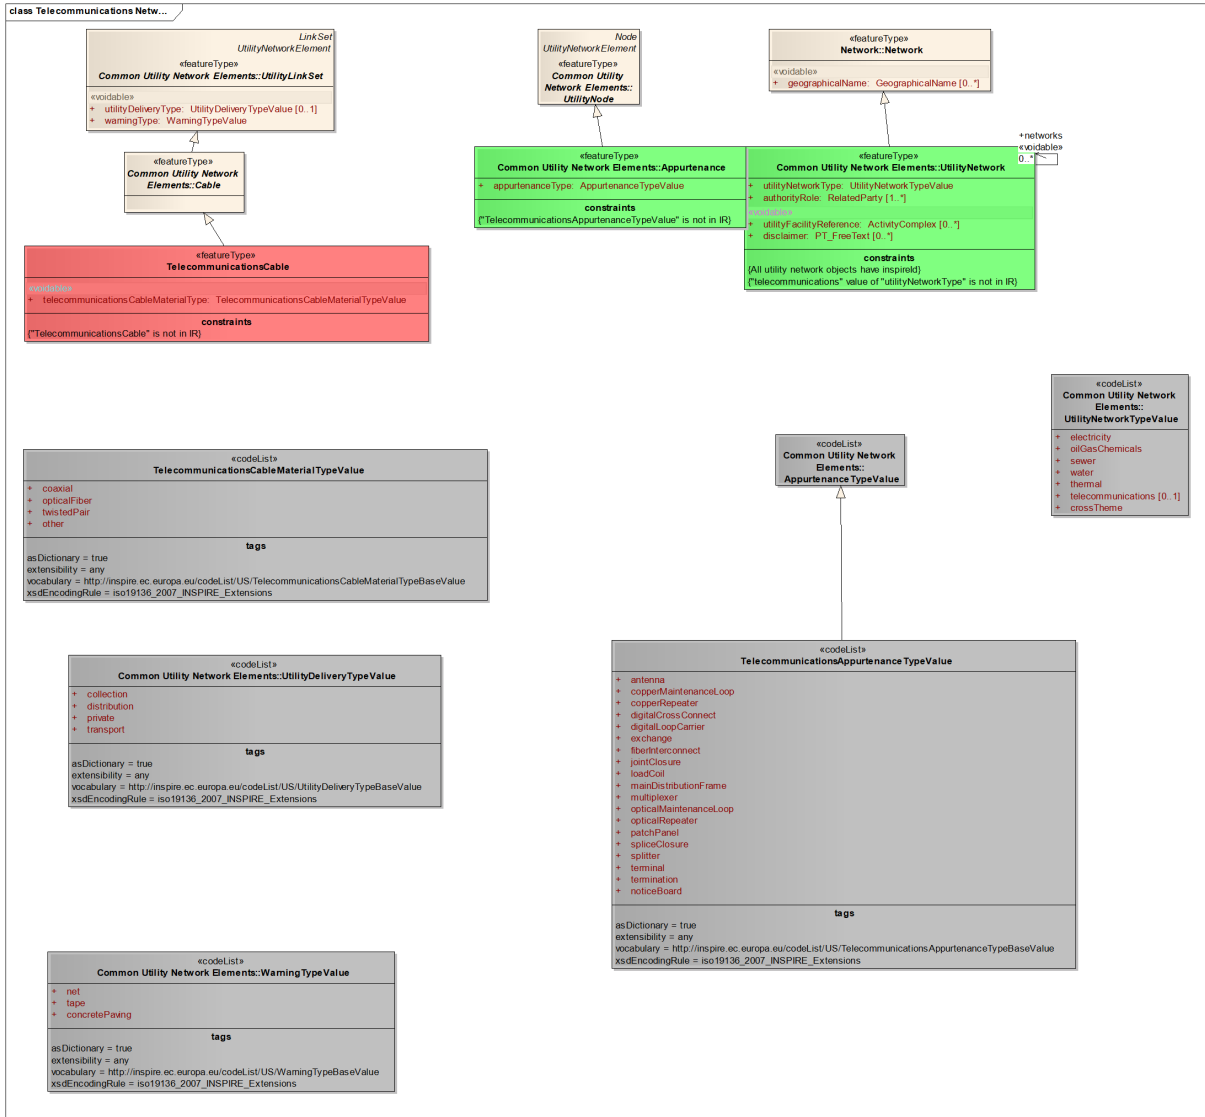


Figure 1 – UML class diagram: Overview of the "Telecommunications Network"

H.2. Feature catalogue

Feature catalogue metadata

Application Schema	INSPIRE Application Schema Telecommunications Network
Version number	3.0

Types defined in the feature catalogue

Type	Package	Stereotypes
<i>TelecommunicationsAppurtenanceTypeValue</i>	Telecommunications Network	«codeList»
<i>TelecommunicationsCable</i>	Telecommunications Network	«featureType»
<i>TelecommunicationsCableMaterialTypeValue</i>	Telecommunications Network	«codeList»

H.2.1. Spatial object types

H.2.1.1. TelecommunicationsCable

TelecommunicationsCable	
Name:	telecommunications cable
Subtype of:	Cable
Definition:	A utility link or link sequence used to convey data signals (PSTN, radio or computer) from one location to another.
Stereotypes:	«featureType»
Attribute: telecommunicationsCableMaterialType	
Name:	telecommunications cable material type
Value type:	TelecommunicationsCableMaterialTypeValue
Definition:	Type of cable material.
Multiplicity:	1
Stereotypes:	«voidable»
Constraint: "TelecommunicationsCable" is not in IR	
Natural language:	
OCL:	

H.2.2. Code lists

H.2.2.1. TelecommunicationsAppurtenanceTypeValue

TelecommunicationsAppurtenanceTypeValue

Name:	telecommunications appurtenance type
Definition:	Classification of telecommunication appurtenances.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/TelecommunicationsAppurtenanceTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

H.2.2.2. TelecommunicationsCableMaterialTypeValue

TelecommunicationsCableMaterialTypeValue

Name:	telecommunications cable material type
Definition:	Classification of telecommunications cable materials.
Extensibility:	any
Identifier:	http://inspire.ec.europa.eu/codelist/TelecommunicationsCableMaterialTypeValue
Values:	The allowed values for this code list comprise any values defined by data providers. INSPIRE Registry includes recommended values that may be used by data providers.

H.2.3. Imported types (informative)

This section lists definitions for feature types, data types and code lists that are defined in other application schemas. The section is purely informative and should help the reader understand the feature catalogue presented in the previous sections. For the normative documentation of these types, see the given references.

H.2.3.1. Cable

Cable (abstract)	
Package:	Common Utility Network Elements
Reference:	INSPIRE Data specification on Utility and Governmental Services [DS-D2.8.III.6]
Definition:	A utility link or link sequence used to convey electricity or data from one location to another.

H.3. INSPIRE-governed code lists

H.3.1. Values of code list TelecommunicationsAppurtenanceTypeValue

Value	Name	Definition	Description	Parent value
antenna	antenna	Antenna.	An antenna (or aerial) is a transducer that transmits or receives electromagnetic waves. In other words, antennas convert electromagnetic radiation into electric current, or vice versa.	
copperMaintenanceLoop	copper Maintenance Loop	Copper (twisted-pair) maintenance loop.	A copper maintenance loop is a coil of slack copper cable that is used to support future joining or other maintenance activities.	
copperRepeater	copper Repeater	Copper repeater.	A copper repeater is copper line conditioning equipment that amplifies the analog or digital input signal.	
digitalCrossConnect	digital Cross Connect	Digital cross connect (DXC).	A digital cross connect is a patch panel for copper cables that are used to provide digital service. Fibers in cables are connected to signal ports in this equipment.	

Value	Name	Definition	Description	Parent value
digitalLoopCarrier	digital Loop Carrier	Digital loop carrier (DLC).	A digital loop carrier is a device that multiplexes an optical signal in to multiple lower level digital signals. Fibers in cables are connected to signal ports in this equipment.	
exchange	exchange	Exchange (switch).	The exchange (central office) is the physical building used to house the inside plant equipment (distribution frames, lasers, switches etc).	
fiberInterconnect	fiber Interconnect	Fiber interconnect (FIC).	A fiber interconnect terminates individual fibers or establishes a connection between two or more fiber cables. Fibers in cables are connected to signal ports in the equipment.	
jointClosure	joint Closure	Joint closure (copper or fiber).	A protective joint closure for either copper or fiber-optic cable joints. A cable joint consists of spliced conductors and a closure.	

Value	Name	Definition	Description	Parent value
loadCoil	load Coil	Load coil.	A load coil is a copper line conditioning equipment. Standard voice phone calls degrade noticeably when the copper portion of a phone line is greater than 18 kilofeet long. In order to restore call quality, load coils are inserted at specific intervals along the loop.	
mainDistributionFrame	main Distribution Frame	Main distribution frame (MDF).	A main distribution frame is often found at the local exchange (Central Office) and is used to terminate the copper cables running from the customer's site. The frame allows these cables to be cross connected using patch cords to other equipment such as a concentrator or switch.	

Value	Name	Definition	Description	Parent value
multiplexer	multiplexer	Multiplexer (MUX).	A multiplexer is a device that combines multiple inputs into an aggregate signal to be transported via a single transmission channel. Fibers in cables are connected to signal ports in this equipment.	
opticalMaintenanceLoop	optical Maintenance Loop	Optical maintenance loop.	An optical maintenance loop is a coil of slack fiber cable that is used to support future splicing or other maintenance activities.	
opticalRepeater	optical Repeater	Optical repeater.	An optical repeater is a device that receives an optical signal, amplifies it (or, in the case of a digital signal, reshapes, retimes, or otherwise reconstructs it), and retransmits it as an optical signal. Fibers in cables are connected to signal ports in this equipment.	

Value	Name	Definition	Description	Parent value
patchPanel	patch Panel	Patch panel.	A patch panel is device where connections are made between incoming and outgoing fibers. Fibers in cables are connected to signal ports in this equipment.	

Value	Name	Definition	Description	Parent value
spliceClosure	splice Closure	Splice closure.	<p>A splice closure is usually a weatherproof encasement, commonly made of tough plastic, that envelops the exposed area between spliced cables, i.e., where the jackets have been removed to expose the individual transmission media, optical or metallic, to be joined. The closure usually contains some device or means to maintain continuity of the tensile strength members of the cables involved, and also may maintain electrical continuity of metallic armor, and/or provide external connectivity to such armor for electrical grounding. In the case of fiber optic cables, it also contains a splice organizer to facilitate the splicing process and protect the exposed fibers from mechanical damage. In addition to the seals at its seams and points of cable</p>	

Value	Name	Definition	Description	Parent value
splitter	splitter	Splitter.	A splitter is a transmission coupling device for separately sampling (through a known coupling loss) either the forward (incident) or the backward (reflected) wave in a transmission line. Fibers in cables are connected to signal ports in this equipment.	
terminal	terminal	Terminal.	Terminals are in-loop plant hardware, specifically designed to facilitate connection and removal of distribution cable, drop or service wire to and from cable pairs at a particular location. Terminals are a class of equipment that establishes the end point of a section of the transmission network between the CO and the customer.	

Value	Name	Definition	Description	Parent value
termination	termination	Termination.	Terminations are a generic feature class for the end points of cables. These may be considered similar to service drops to buildings. They represent a point at which the telephone company network ends and connects with the wiring at the customer premises.	
noticeBoard	notice Board			

H.3.2. Values of code list TelecommunicationsCableMaterialTypeValue

Value	Name	Definition	Description	Parent value
coaxial	coaxial	Coaxial cable.	A coaxial cable, or coax, is an electrical cable with an inner conductor surrounded by a flexible, tubular insulating layer, surrounded by a tubular conducting shield.	

Value	Name	Definition	Description	Parent value
opticalFiber	optical Fiber	Fibre-optic cable.	A fiber optic cable is composed of thin filaments of glass through which light beams are transmitted to carry large amounts of data. The optical fibers are surrounded by buffers, strength members, and jackets for protection, stiffness, and strength. A fiber-optic cable may be an all-fiber cable, or contain both optical fibers and metallic conductors.	
twistedPair	twisted Pair	Twisted pair (copper) cable.	A copper cable is a group of metallic conductors (copper wires) bundled together that are capable of carrying voice and data transmissions. The copper wires are bound together, usually with a protective sheath, a strength member, and insulation between individual conductors and the entire group.	
other	other	Other.		

[1] The common document template is available in the "Framework documents" section of the data specifications web page at <http://inspire.jrc.ec.europa.eu/index.cfm/pageid/2>

- [2] For all 34 Annex I,II and III data themes: within two years of the adoption of the corresponding Implementing Rules for newly collected and extensively restructured data and within 5 years for other data in electronic format still in use
- [3] The current status of registered SDICs/LMOs is available via INSPIRE website: <http://inspire.jrc.ec.europa.eu/index.cfm/pageid/42>
- [4] Surveys on unique identifiers and usage of the elements of the spatial and temporal schema,
- [5] The Data Specification Drafting Team has been composed of experts from Austria, Belgium, Czech Republic, France, Germany, Greece, Italy, Netherlands, Norway, Poland, Switzerland, UK, and the European Environment Agency
- [6] The Thematic Working Groups have been composed of experts from Austria, Australia, Belgium, Bulgaria, Czech Republic, Denmark, Finland, France, Germany, Hungary, Ireland, Italy, Latvia, Netherlands, Norway, Poland, Romania, Slovakia, Spain, Slovenia, Sweden, Switzerland, Turkey, UK, the European Environment Agency and the European Commission.
- [7] For Annex IIIII, the consultation and testing phase lasted from 20 June to 21 October 2011.
- [8] Commission Regulation (EU) No 1089/2010 [implementing Directive 2007/2/EC of the European Parliament and of the Council as regards interoperability of spatial data sets and services](#), published in the Official Journal of the European Union on 8th of December 2010.
- [9] The framework documents are available in the "Framework documents" section of the data specifications web page at <http://inspire.jrc.ec.europa.eu/index.cfm/pageid/2>
- [10] UML – Unified Modelling Language
- [11] Conceptual models related to specific areas (e.g. INSPIRE themes)
- [12] In the case of the Annex IIIII data specifications, the extracted requirements are used to formulate an amendment to the existing Implementing Rule.
- [13] *developed and used by Annex I "Transport networks" and "Hydrography" themes*
- [14] The INSPIRE Glossary is available from <http://inspire-registry.jrc.ec.europa.eu/registers/GLOSSARY>
- [15] See [ISO 19103
- [16] *Attention: The "union" type is not yet taken into account in the process "Extraction of feature catalogue". It is therefore not included in the § "5.4.2 Feature catalogue", but visible in the following figure "UML class diagram: Overview of the US "Administrative and social governmental services" application schema"*
- [17] http://ec.europa.eu/eurostat/ramon/nomenclatures/index.cfm?TargetUrl=LST_NOM_DTL&StrNom=CL_COFOG99&StrLanguageCode=EN&IntPcKey=&StrLayoutCode=HIERARCHIC
- [18] *For a better overview, the code list is provided within Annex D.*
- [19] http://www.uis.unesco.org/Education/Documents/UNESCO_GC_36C-19_ISCED_EN.pdf
- [20] OJ L 326, 4.12.2008, p. 12.
- [21] OJ L 326, 4.12.2008, p. 12.
- [22] The Implementing Rules and Technical Guidelines on INSPIRE Network Services are available at <http://inspire.jrc.ec.europa.eu/index.cfm/pageid/5>
- [23] OJ L 274, 20.10.2009, p. 9.
- [24] OJ L 274, 20.10.2009, p. 9.
- [26] One layer shall be made available for each code list value, in accordance with Art. 14(3).
- [28] One layer shall be made available for each code list value, in accordance with Art. 14(3).
- [29] EIEL: Spanish acronym for "Enquiry on Local Infrastructures and Services"